STATE OF UTAH
DEPARTMENT OF NATURAL RESOURCES
DIVISION OF OIL, GAS AND MINING

FORM 3
AMENDED REPORT ☐

APPLICATION FOR PERMIT TO DRILL

1. WELL NAME and NUMBER
BONANZA 1023-5M3BS

2. TYPE OF WORK
DRILL NEW WELL ● REENTER P&A WELL ○ DEEPEN WELL ○

3. FIELD OR WILDCAT
NATURAL BUTTES

4. TYPE OF WELL
Gas Well Coalbed Methane Well: NO

5. UNIT or COMMUNITIZATION AGREEMENT NAME

6. NAME OF OPERATOR
KERR-MCGEE OIL & GAS ONSHORE, L.P.

7. OPERATOR PHONE
720 929-6515

8. ADDRESS OF OPERATOR
P.O. Box 173779, Denver, CO, 80217

9. OPERATOR E-MAIL
julie.jacobson@anadarko.com

10. MINERAL LEASE NUMBER (FEDERAL, INDIAN, OR STATE)
UTU73450

11. MINERAL OWNERSHIP
FEDERAL ● INDIAN ○ STATE ○ FEE ○

12. SURFACE OWNERSHIP
FEDERAL ● INDIAN ○ STATE ○ FEE ○

13. NAME OF SURFACE OWNER (if box 12 = 'fee')

14. SURFACE OWNER PHONE (if box 12 = 'fee')

15. ADDRESS OF SURFACE OWNER (if box 12 = 'fee')

16. SURFACE OWNER E-MAIL (if box 12 = 'fee')

17. INDIAN ALLOTTEE OR TRIBE NAME (if box 12 = 'INDIAN')

18. INTEND TO COMMINGLE PRODUCTION FROM MULTIPLE FORMATIONS
YES ● (Submit Commingling Application) NO ○

19. SLANT
VERTICAL ○ DIRECTIONAL ● HORIZONTAL ○

20. LOCATION OF WELL	FOOTAGES	QTR-QTR	SECTION	TOWNSHIP	RANGE	MERIDIAN
LOCATION AT SURFACE	205 FSL 1001 FWL	SWSW	5	10.0 S	23.0 E	S
Top of Uppermost Producing Zone	566 FSL 240 FWL	SWSW	5	10.0 S	23.0 E	S
At Total Depth	566 FSL 240 FWL	SWSW	5	10.0 S	23.0 E	S

21. COUNTY
UINTAH

22. DISTANCE TO NEAREST LEASE LINE (Feet)
240

23. NUMBER OF ACRES IN DRILLING UNIT
80

25. DISTANCE TO NEAREST WELL IN SAME POOL (Applied For Drilling or Completed)
881

26. PROPOSED DEPTH
MD: 8575 TVD: 8457

27. ELEVATION - GROUND LEVEL
5297

28. BOND NUMBER
WYB000291

29. SOURCE OF DRILLING WATER / WATER RIGHTS APPROVAL NUMBER IF APPLICABLE
43-8496

Hole, Casing, and Cement Information

String	Hole Size	Casing Size	Length	Weight	Grade & Thread	Max Mud Wt.	Cement	Sacks	Yield	Weight
Surf	11	8.625	0 - 2290	28.0	J-55 LT&C	0.2	Type V	180	1.15	15.8
							Class G	270	1.15	15.8
Prod	7.875	4.5	0 - 8575	11.6	I-80 LT&C	12.5	Premium Lite High Strength	280	3.38	11.0
							50/50 Poz	1150	1.31	14.3

ATTACHMENTS

VERIFY THE FOLLOWING ARE ATTACHED IN ACCORDANCE WITH THE UTAH OIL AND GAS CONSERVATION GENERAL RULES

- ☑ WELL PLAT OR MAP PREPARED BY LICENSED SURVEYOR OR ENGINEER
- ☑ COMPLETE DRILLING PLAN
- ☐ AFFIDAVIT OF STATUS OF SURFACE OWNER AGREEMENT (IF FEE SURFACE)
- ☐ FORM 5. IF OPERATOR IS OTHER THAN THE LEASE OWNER
- ☑ DIRECTIONAL SURVEY PLAN (IF DIRECTIONALLY OR HORIZONTALLY DRILLED)
- ☑ TOPOGRAPHICAL MAP

NAME Gina Becker **TITLE** Regulatory Analyst II **PHONE** 720 929-6086

SIGNATURE **DATE** 10/17/2011 **EMAIL** gina.becker@anadarko.com

API NUMBER ASSIGNED
43047520770000

APPROVAL

Permit Manager

RECEIVED: October 26, 2011

Kerr-McGee Oil & Gas Onshore. L.P.

BONANZA 1023-5M3BS

Surface: 205 FSL / 1001 FWL SWSW
BHL: 566 FSL / 240 FWL SWSW

Section 5 T10S R23E

Uintah County, Utah
Mineral Lease: UTU-73450

ONSHORE ORDER NO. 1

DRILLING PROGRAM

1. & 2. **Estimated Tops of Important Geologic Markers:**
Estimated Depths of Anticipated Water, Oil, Gas, or Mineral Formations:

Formation	Depth	Resource
Uinta	0 - Surface	
Green River	1231	
Birds Nest	1498	Water
Mahogany	1844	Water
Wasatch	4209	Gas
Mesaverde	6328	Gas
MVU2	7287	Gas
MVL1	7810	Gas
TVD	8457	
TD	8575	

3. **Pressure Control Equipment** (Schematic Attached)

Please refer to the attached Drilling Program

4. **Proposed Casing & Cementing Program:**

Please refer to the attached Drilling Program

5. **Drilling Fluids Program:**

Please refer to the attached Drilling Program

6. **Evaluation Program:**

Please refer to the attached Drilling Program

RECEIVED: October 17, 2011

7. **Abnormal Conditions:**

Maximum anticipated bottom hole pressure calculated at 8457' TVD, approximately equals 5,412 psi 0.64 psi/ft = actual bottomhole gradient

Maximum Anticipated Bottom Hole Pressure (MABHP) = Pore Pressure at TD

Maximum anticipated surface pressure equals approximately 3,540 psi (bottom hole pressure minus the pressure of a partially evacuated hole calculated at 0.22 psi/foot, per Onshore Order No. 2).

Per Onshore Order No. 2 - Max Anticipated Surf. Press.(MASP) = (Pore Pressure at next csg point-
(0.22 psi/ft-partial evac gradient x TVD of next csg point))

8. **Anticipated Starting Dates:**

Drilling is planned to commence immediately upon approval of this application.

9. **Variances:**

Please refer to the attached Drilling Program.
Onshore Order #2 – Air Drilling Variance

Kerr-McGee Oil & Gas Onshore LP (KMG) respectfully requests a variance to several requirements associated with air drilling outlined in Onshore Order 2

- Blowout Prevention Equipment (BOPE) requirements;
- Mud program requirements; and
- Special drilling operation (surface equipment placement) requirements associated with air drilling.

This Standard Operating Practices addendum provides supporting information as to why KMG current air drilling practices for constructing the surface casing hole should be granted a variance to Onshore Order 2 air drilling requirements.

The reader should note that the air rig is used only to construct a stable surface casing hole through a historically difficult lost circulation zone. A conventional rotary rig follows the air rig, and is used to drill and construct the majority of the wellbore.

More notable, KMG has used the air rig layout and procedures outlined below to drill the surface casing hole in approximately 675 wells without incident of blow out or loss of life.

Background

In a typical well, KMG utilizes an air rig for drilling the surface casing hole, an interval from the surface to surface casing depths, which varies in depth from 1,700 to 2,800 feet. The air rig drilling operation does not drill through productive or over pressured formations in KMG field, but does penetrate the Uinta and Green River Formations. The purpose of the air drilling operation is to overcome the severe loss circulation zone in the Green River known as the Bird's Nest while creating a stable hole for the surface casing. The surface casing hole is generally drilled to approximately 500 feet below the Bird's Nest.

RECEIVED: October 17, 2011

Before the surface air rig is mobilized, a rathole rig is utilized to set and cement conductor pipe through a competent surface formation. Generally, the conductor is set at 40 feet. In some cases, conductor may be set deeper in areas that the surface formation is not found competent. This rig also drills the rat and mouse holes in preparation for the surface casing and production string drilling operations.

The air rig is then mobilized to drill the surface casing hole by drilling a 12 1/4 inch hole for the first 200 feet, then will drill a 11inch hole to just above the Bird's Nest interval with an air hammer. The hammer is then tripped and replaced with a 11 inch tri-cone bit. The tri-cone bit is used to drill to the surface casing point, approximately 500 feet below the loss circulation zone (Bird's Nest). The 8-5/8 inch surface casing is then run and cemented in place, thereby isolating the lost circulation zone.

KMG fully appreciates Onshore Order 2 well control and safety requirements associated with a typical air drilling operations. However, the requirements of Onshore Order 2 are excessive with respect to the air rig layout and drilling operation procedures that are currently in practice to drill and control the surface casing hole in KMG Fields.

Variance for BOPE Requirements
The air rig operation utilizes a properly lubricated and maintained air bowl diverter system which diverts the drilling returns to a six-inch blooie line. The air bowl is the only piece of BOPE equipment which is installed during drilling operations and is sufficient to contain the air returns associated with this drilling operation. As was discussed earlier, the drilling of the surface hole does not encounter any over pressured or productive zones, and as a result standard BOPE equipment should not be required. In addition, standard drilling practices do not support the use of BOPE on 40 feet of conductor pipe.

Variance for Mud Material Requirements
Onshore Order 2 also states that sufficient quantities of mud materials shall be maintained or readily accessible for the purpose of assuring adequate well control. Once again, the surface hole drilling operations does not encounter over pressured or productive intervals, and as a result there is not a need to control pressure in the surface hole with a mud system. Instead of mud, the air rigs utilize water from the reserve pit for well control, if necessary. A skid pump which is located near the reserve pit (see attachment) will supply the water to the well bore.

Variance for Special Drilling Operation (surface equipment placement) Requirements
Onshore Order 2 requires specific safety distances or setbacks for the placement of associated standard air drilling equipment, wellbore, and reserve pits. The air rigs used to drill the surface holes are not typical of an air rig used to drill a producing hole in other parts of the US. These are smaller in nature and designed to fit a KMG location. The typical air rig layout for drilling surface hole in the field is attached.

Typically the blooie line discharge point is required to be 100 feet from the well bore. In the case of a KMG well, the reserve pit is only 45 feet from the rig and is used for the drill cuttings. The blooie line, which transports the drill cuttings from the well to the reserve pit, subsequently discharges only 45 feet from the well bore.

Typically the air rig compressors are required to be located in the opposite direction from the blooie line and a minimum of 100 feet from the well bore. At the KMG locations, the air rig compressors are approximately 40 feet from the well bore and approximately 60 feet from the blooie line discharge due to the unique air rig design. The air compressors (see attachment) are located on the rig (1250 cfm) and

RECEIVED: October 17, 2011

on a standby trailer (1170 cfm). A booster sits between the two compressors and boosts the output from 350 psi to 2000 psi. The design does put the booster and standby compressor opposite from the blooie line.

Lastly, Onshore Order 2 addresses the need for an automatic igniter or continuous pilot light on the blooie line. The air rig does not utilize an igniter as the surface hole drilling operation does not encounter productive formations.

Variance for FIT Requirements
KMG also respectfully requests a variance to Onshore Order 2, Section III, Part Bi, for the pressure integrity test (PIT, also known as a formation integrity test (FIT)). This well is not an exploratory well and is being drilled in an area where the formation integrity is well known. Additionally, when an FIT is run with the mud weight as required, the casing shoe frequently breaks down and causes subsequent lost circulation when drilling the entire depth of the well.

Conclusion
The air rig operating procedures and the attached air rig layout have effectively maintained well control while drilling the surface holes in KMG Fields. KMG respectfully requests a variance from Onshore Order 2 with respect to air drilling well control requirements as discussed above.

10. Other Information:

Please refer to the attached Drilling Program.

RECEIVED: October 17, 2011

KERR-McGEE OIL & GAS ONSHORE LP

DRILLING PROGRAM

COMPANY NAME	KERR-McGEE OIL & GAS ONSHORE LP			DATE	October 14, 2011
WELL NAME	**BONANZA 1023-5M3BS**			TD	8,457' TVD 8,575' MD
FIELD	Natural Buttes	COUNTY	Uintah	STATE	Utah
FINISHED ELEVATION	5296.7				
SURFACE LOCATION	SWSW 205 FSL 1001 FWL	Sec 5	T 10S	R 23E	
	Latitude: 39.971262	Longitude: -109.356545		NAD 83	
BTM HOLE LOCATION	SWSW 566 FSL 240 FWL	Sec 5	T 10S	R 23E	
	Latitude: 39.972249	Longitude: -109.359262		NAD 83	
OBJECTIVE ZONE(S)	Wasatch/Mesaverde				
ADDITIONAL INFO	Regulatory Agencies: BLM (Minerals), BLM (Surface), UDOGM Tri-County Health Dept.				

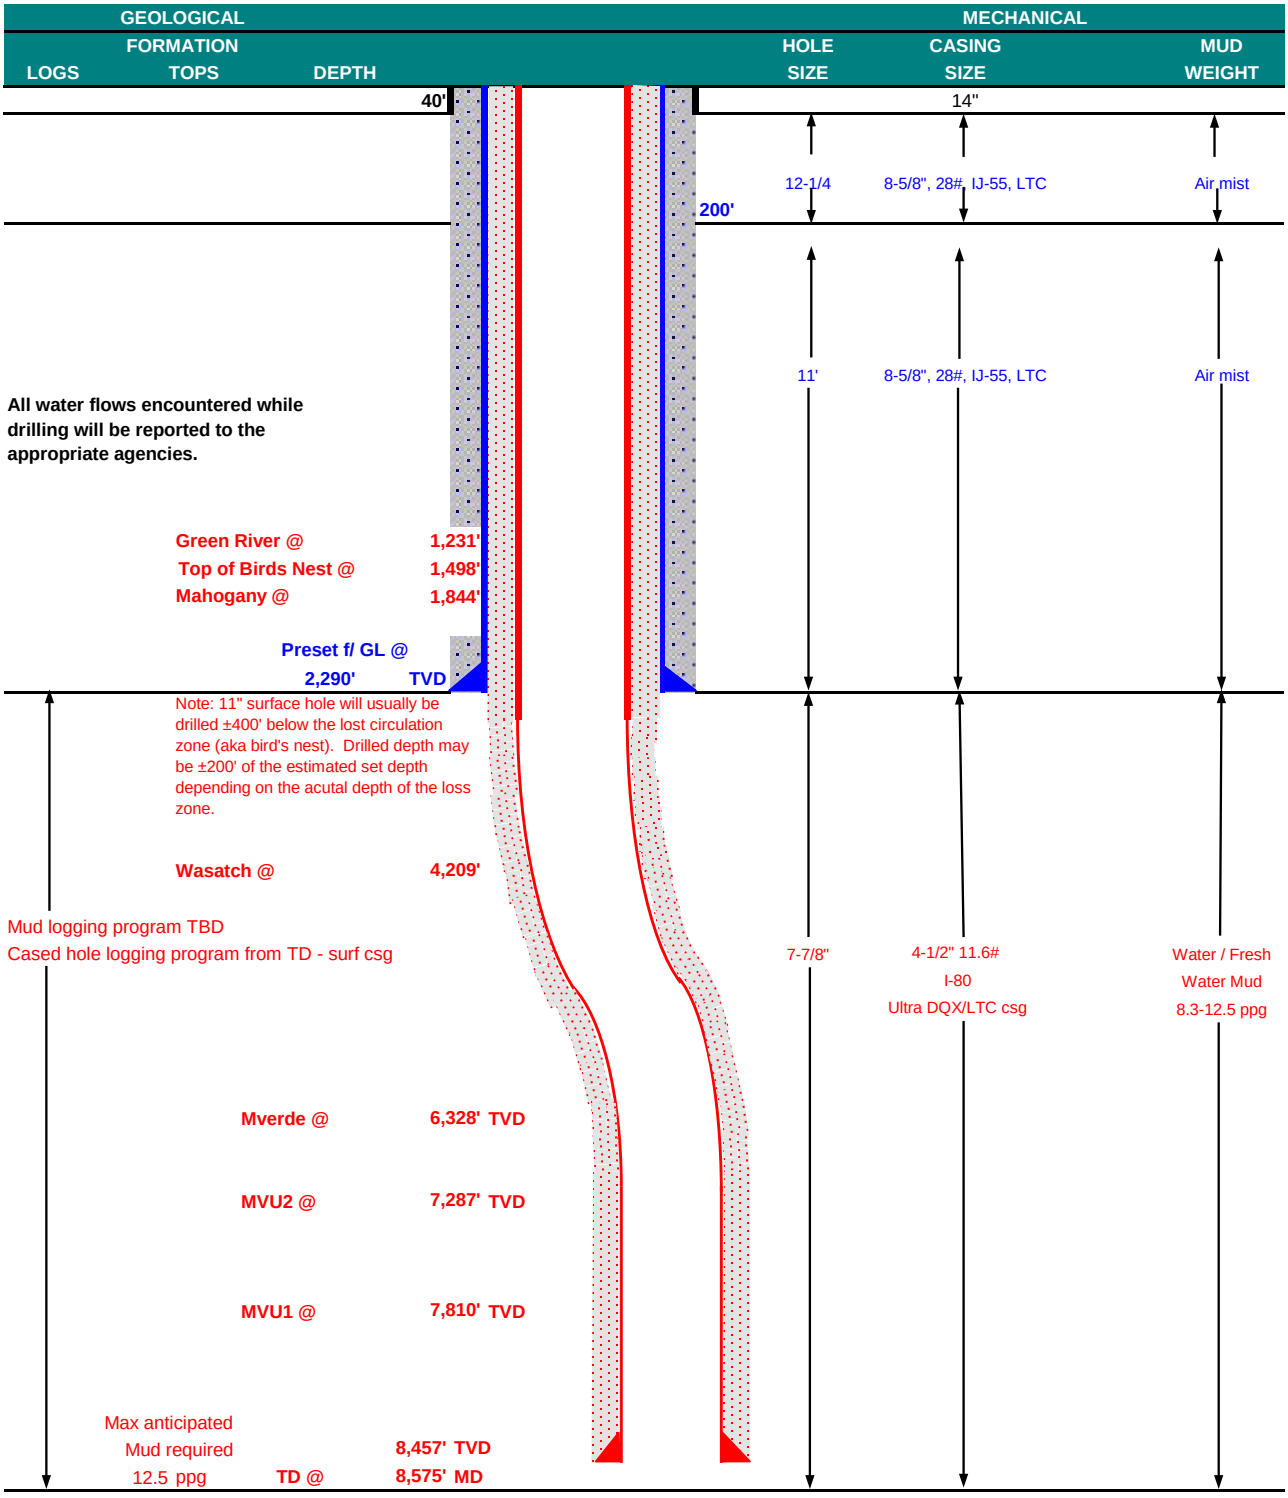

KERR-McGEE OIL & GAS ONSHORE LP

DRILLING PROGRAM

CASING PROGRAM

	SIZE	INTERVAL			WT.	GR.	CPLG.	DESIGN FACTORS BURST	COLLAPSE	LTC	DQX TENSION
CONDUCTOR	14"	0-40'									
								3,390	1,880	348,000	N/A
SURFACE	8-5/8"	0	to	2,290	28.00	IJ-55	LTC	2.36	1.75	6.20	N/A
								7,780	6,350	223,000	267,035
PRODUCTION	4-1/2"	0	to	5,000	11.60	I-80	DQX	1.11	1.16		3.32
	4-1/2"	5,000	to	8,575'	11.60	I-80	LTC	1.11	1.16	6.65	

Surface Casing:

(Burst Assumptions: TD = 12.5 ppg) 0.73 psi/ft = frac gradient @ surface shoe

Fracture at surface shoe with 0.1 psi/ft gas gradient above

(Collapse Assumption: Fully Evacuated Casing, Max MW) (Tension Assumptions: Air Weight of Casing*Buoy.Fact. of water)

Production casing:

(Burst Assumptions: Pressure test with 8.4ppg @ 7000 psi) 0.64 psi/ft = bottomhole gradient

(Collapse Assumption: Fully Evacuated Casing, Max MW) (Tension Assumptions: Air Weight of Casing*Buoy.Fact. of water)

CEMENT PROGRAM

		FT. OF FILL	DESCRIPTION	SACKS	EXCESS	WEIGHT		YIELD
SURFACE	LEAD	500'	Premium cmt + 2% CaCl	180	60%	15.80		1.15
Option 1			+ 0.25 pps flocele					
	TOP OUT CMT (6 jobs)	1,200'	20 gals sodium silicate + Premium cmt	270	0%	15.80		1.15
			+ 2% CaCl + 0.25 pps flocele					
SURFACE		**NOTE: If well will circulate water to surface, option 2 will be utilized**						
Option 2	LEAD	1,790'	65/35 Poz + 6% Gel + 10 pps gilsonite	170	35%	11.00		3.82
			+ 0.25 pps Flocele + 3% salt BWOW					
	TAIL	500'	Premium cmt + 2% CaCl	150	35%	15.80		1.15
			+ 0.25 pps flocele					
	TOP OUT CMT	as required	Premium cmt + 2% CaCl	as req.		15.80		1.15
PRODUCTION	LEAD	3,705'	Premium Lite II +0.25 pps	280	20%	11.00		3.38
			celloflake + 5 pps gilsonite + 10% gel					
			+ 0.5% extender					
	TAIL	4,870'	50/50 Poz/G + 10% salt + 2% gel	1,150	35%	14.30		1.31
			+ 0.1% R-3					

*Substitute caliper hole volume plus 0% excess for LEAD if accurate caliper is obtained

*Substitute caliper hole volume plus 10% excess for TAIL if accurate caliper is obtained

FLOAT EQUIPMENT & CENTRALIZERS

SURFACE	Guide shoe, 1 jt, insert float. Centralize first 3 joints with bow spring centralizers. Thread lock guide shoe
PRODUCTION	Float shoe, 1 jt, float collar. No centralizers will be used.

ADDITIONAL INFORMATION

Test casing head to 750 psi after installing. Test surface casing to 1,500 psi prior to drilling out.

BOPE: 11" 5M with one annular and 2 rams. The BOPE will be installed before the production hole is drilled and tested to 5,000 psi (annular to 2,500 psi) prior to drilling out the surface casing shoe. Record on chart recorder and tour sheet. Function test rams on each trip. Maintain safety valve and inside BOP on rig floor at all times. Most rigs have top drives; however, if used, the Kelly is to be equipped with upper and lower kelly valves.

Surveys will be taken at 1,000' minimum intervals.

Most rigs have PVT System for mud monitoring. If no PVT is available, visual monitoring will be utilized.

DRILLING ENGINEER: Nick Spence / Danny Showers / Chad Loesel **DATE:**

DRILLING SUPERINTENDENT: Kenny Gathings / Lovel Young **DATE:**

EXHIBIT A
BONANZA 1023-5M3BS

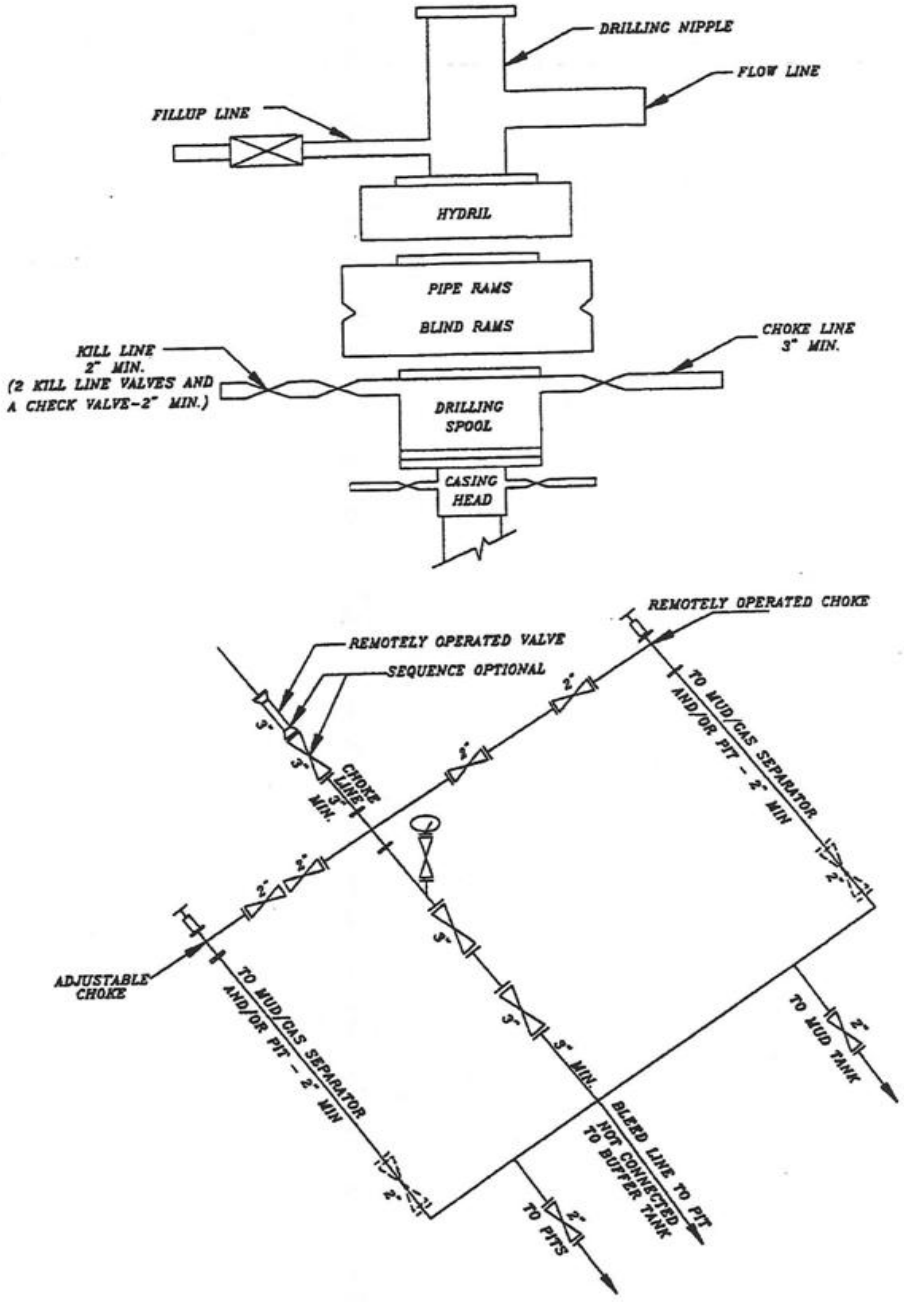

SCHEMATIC DIAGRAM OF 5,000 PSI BOP STACK

RECEIVED: October 17, 2011

API Well Number: 43047520770000

T10S, R23E, S.L.B.&M.

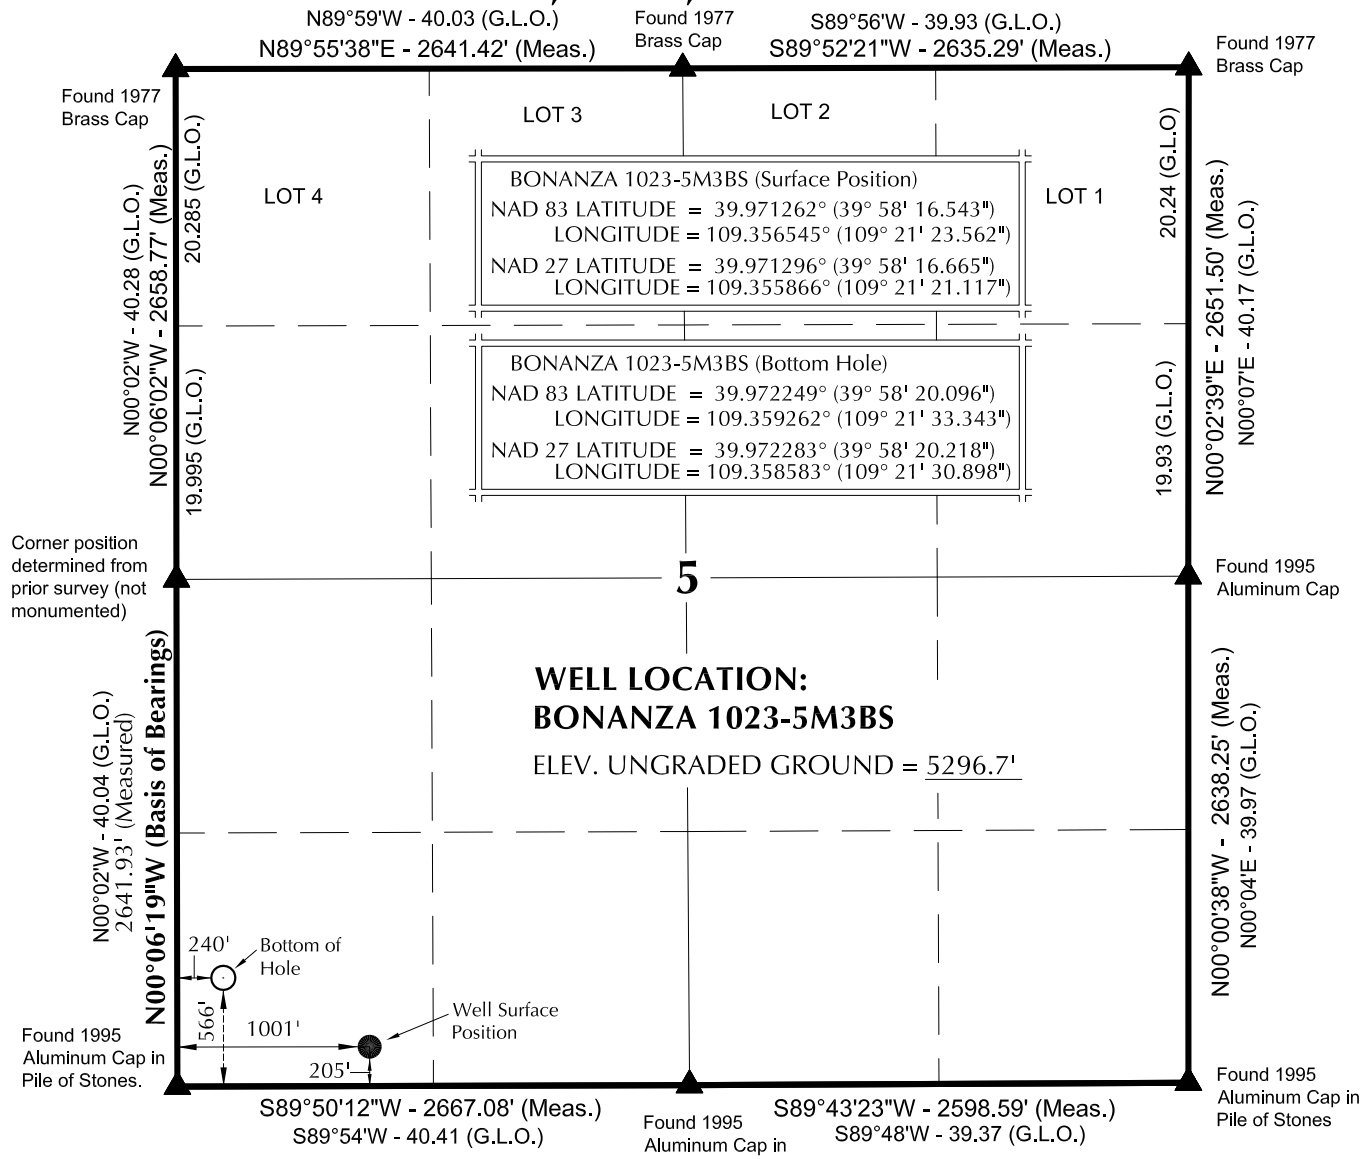

NOTES:

▲ = Section Corners Located

1. Well footages are measured at right angles to the Section Lines.
2. G.L.O. distances are shown in feet or chains. 1 chain = 66 feet.
3. The Bottom of hole bears N64°47'49"W - 842.34' from the Surface Position.
4. Bearings are based on Global Positioning Satellite observations.
5. Basis of elevation is Tri-Sta "Two Water" located in the NW ¼ of Section 1, T10S, R21E, S.L.B.&M. The elevation of this Tri-Sta is shown on the Big Pack Mtn NE 7.5 Min. Quadrangle as being 5238'.

N

1000' 500' 0' 1000'

SCALE

SURVEYOR'S CERTIFICATE

THIS IS TO CERTIFY THAT THE ABOVE PLAT WAS PREPARED FROM FIELD NOTES OF ACTUAL SURVEYS MADE BY ME OR UNDER MY SUPERVISION AND THAT THE SAME ARE TRUE AND CORRECT TO THE BEST OF MY KNOWLEDGE AND BELIEF.

PROFESSIONAL LAND SURVEYOR No.6028691 JOHN R STAUGH STATE OF UTAH

PROFESSIONAL LAND SURVEYOR
REGISTRATION No. 6028691
STATE OF UTAH

Kerr-McGee Oil & Gas Onshore, LP
1099 18th Street - Denver, Colorado 80202

WELL PAD: BONANZA 1023-5M

BONANZA 1023-5M3BS
WELL PLAT
566' FSL, 240' FWL (Bottom Hole)
SW ¼ SW ¼ OF SECTION 5, T10S, R23E, S.L.B.&M., UINTAH COUNTY, UTAH.

609 CONSULTING, LLC
371 Coffeen Avenue
Sheridan WY 82801
Phone 307-674-0609
Fax 307-674-0182

TIMBERLINE (435) 789-1365
ENGINEERING & LAND SURVEYING, INC.
209 NORTH 300 WEST - VERNAL, UTAH 84078

DATE SURVEYED: 03-10-10	SURVEYED BY: D.J.S.	SHEET NO: 2
DATE DRAWN: 03-12-10	DRAWN BY: E.M.S.	2 OF 19
SCALE: 1" = 1000'	Date Last Revised:	

RECEIVED: October 17, 2011

API Well Number: 43047520770000

WELL NAME	SURFACE POSITION					BOTTOM HOLE				
	NAD83		NAD27			NAD83		NAD27		
	LATITUDE	LONGITUDE	LATITUDE	LONGITUDE	FOOTAGES	LATITUDE	LONGITUDE	LATITUDE	LONGITUDE	FOOTAGES
BONANZA 1023-5M3CS	39°58'16.517" 39.971255°	109°21'23.686" 109.356579°	39°58'16.640" 39.971289°	109°21'21.241" 109.355900°	203' FSL 992' FWL	39°58'16.190" 39.971164°	109°21'35.715" 109.359921°	39°58'16.313" 39.971198°	109°21'33.270" 109.359242°	171' FSL 55' FWL
BONANZA 1023-5M3BS	39°58'16.543" 39.971262°	109°21'23.562" 109.356545°	39°58'16.665" 39.971296°	109°21'21.117" 109.355866°	205' FSL 1001' FWL	39°58'20.096" 39.972249°	109°21'33.343" 109.359262°	39°58'20.218" 39.972283°	109°21'30.898" 109.358583°	566' FSL 240' FWL
BONANZA 1023-5M1CS	39°58'16.568" 39.971269°	109°21'23.438" 109.356511°	39°58'16.691" 39.971303°	109°21'20.994" 109.355832°	208' FSL 1011' FWL	39°58'22.418" 39.972894°	109°21'24.870" 109.356908°	39°58'22.541" 39.972928°	109°21'22.425" 109.356229°	800' FSL 900' FWL
BONANZA 1023-5M1AS	39°58'16.593" 39.971276°	109°21'23.313" 109.356476°	39°58'16.716" 39.971310°	109°21'20.868" 109.355797°	210' FSL 1021' FWL	39°58'25.712" 39.973809°	109°21'22.304" 109.356196°	39°58'25.834" 39.973843°	109°21'19.860" 109.355517°	1133' FSL 1100' FWL
BONANZA 1023-8C2DS	39°58'16.618" 39.971283°	109°21'23.191" 109.356442°	39°58'16.741" 39.971317°	109°21'20.746" 109.355763°	213' FSL 1030' FWL	39°58'09.716" 39.969366°	109°21'14.626" 109.354063°	39°58'09.838" 39.969400°	109°21'12.182" 109.353384°	487' FNL 1697' FWL
BONANZA 1023-5N3CS	39°58'16.644" 39.971290°	109°21'23.065" 109.356407°	39°58'16.767" 39.971324°	109°21'20.621" 109.355728°	215' FSL 1040' FWL	39°58'16.709" 39.971308°	109°21'16.005" 109.354446°	39°58'16.832" 39.971342°	109°21'13.561" 109.353767°	221' FSL 1590' FWL
BONANZA 1023-5N4AS	39°58'16.694" 39.971304°	109°21'22.816" 109.356338°	39°58'16.817" 39.971338°	109°21'20.372" 109.355659°	220' FSL 1060' FWL	39°58'20.764" 39.972434°	109°21'04.926" 109.351368°	39°58'20.886" 39.972468°	109°21'02.482" 109.350690°	630' FSL 2453' FWL
BONANZA 1023-5M	39°58'16.669" 39.971297°	109°21'22.941" 109.356373°	39°58'16.792" 39.971331°	109°21'20.497" 109.355694°	218' FSL 1050' FWL					

RELATIVE COORDINATES - From Surface Position to Bottom Hole

WELL NAME	NORTH	EAST	WELL NAME	NORTH	EAST	WELL NAME	NORTH	EAST	WELL NAME	NORTH	EAST
BONANZA 1023-5M3CS	-34.2'	-936.8'	BONANZA 1023-5M3BS	358.7'	-762.2'	BONANZA 1023-5M1CS	592.0'	-112.2'	BONANZA 1023-5M1AS	923.0'	77.4'
WELL NAME	NORTH	EAST	WELL NAME	NORTH	EAST	WELL NAME	NORTH	EAST			
BONANZA 1023-8C2DS	-697.8'	667.8'	BONANZA 1023-5N3CS	7.2'	549.8'	BONANZA 1023-5N4AS	413.6'	1392.7'			

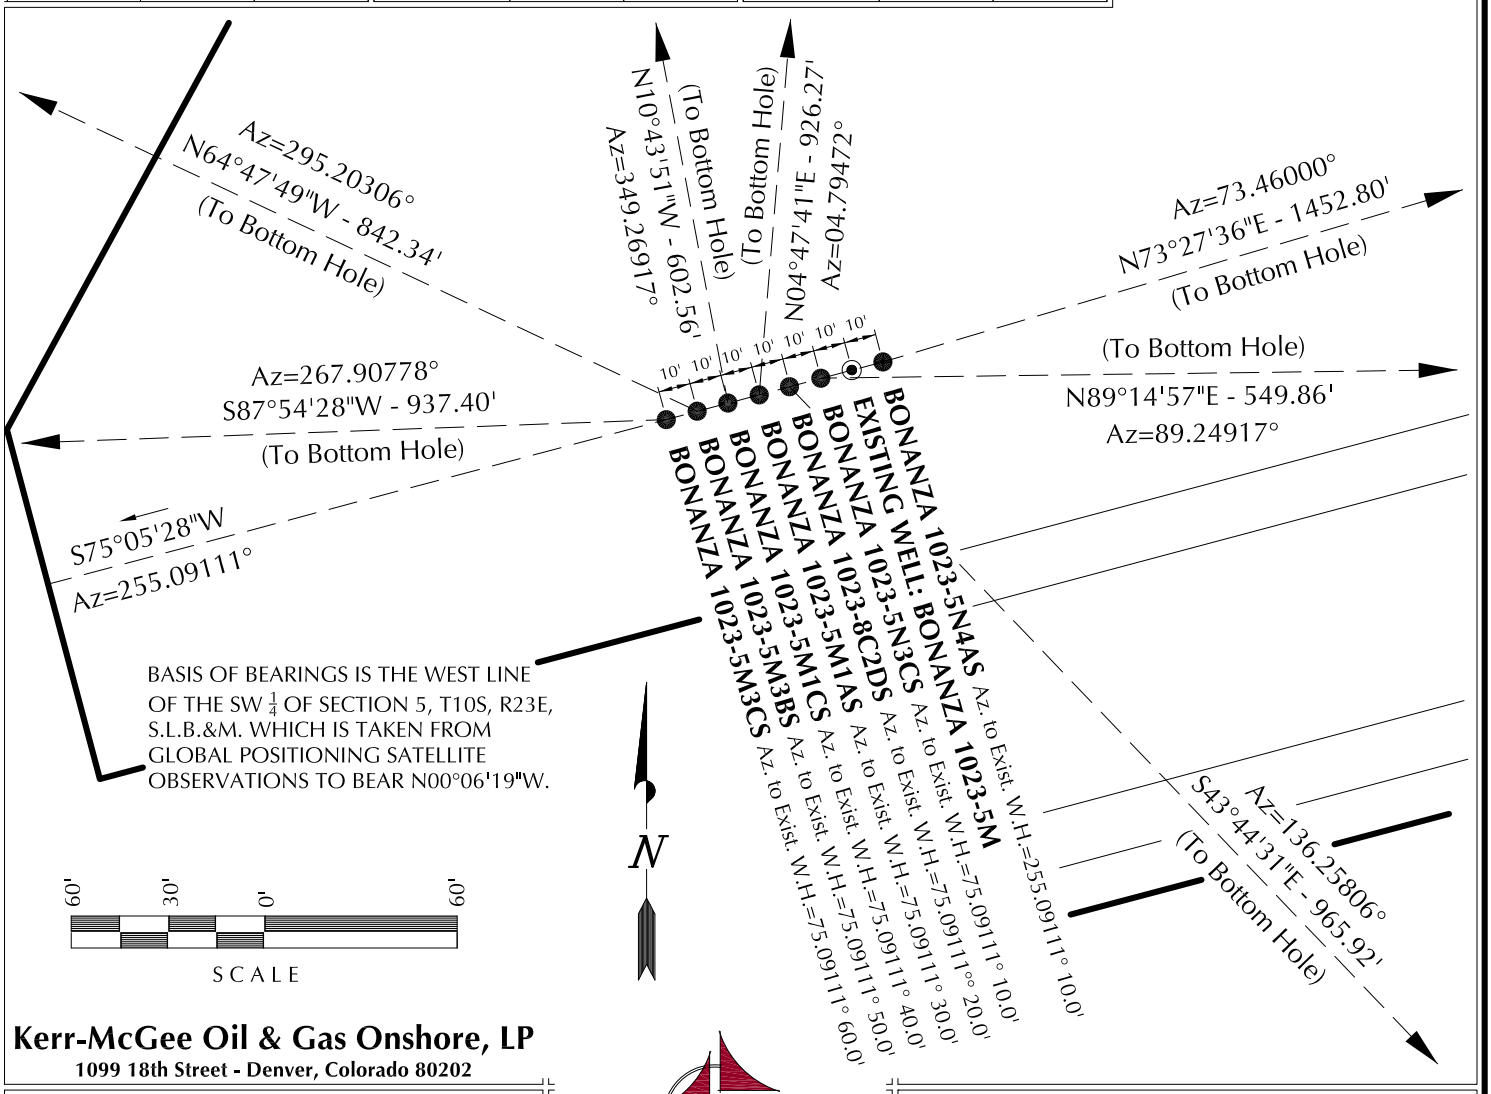

Kerr-McGee Oil & Gas Onshore, LP
1099 18th Street - Denver, Colorado 80202

WELL PAD - BONANZA 1023-5M

WELL PAD INTERFERENCE PLAT
WELLS - BONANZA 1023-5M3CS, BONANZA 1023-5M3BS, BONANZA 1023-5M1CS, BONANZA 1023-5M1AS, BONANZA 1023-8C2DS, BONANZA 1023-5N3CS & BONANZA 1023-5N4AS
LOCATED IN SECTION 5, T10S, R23E, S.L.B.&M., UINTAH COUNTY, UTAH.

609 CONSULTING, LLC
371 Coffeen Avenue
Sheridan WY 82801
Phone 307-674-0609
Fax 307-674-0182

TIMBERLINE (435) 789-1365
ENGINEERING & LAND SURVEYING, INC.
209 NORTH 300 WEST - VERNAL, UTAH 84078

DATE SURVEYED: 03-10-10	SURVEYED BY: D.J.S.	SHEET NO: 8
DATE DRAWN: 03-12-10	DRAWN BY: E.M.S.	8 OF 19
SCALE: 1" = 60'	Date Last Revised:	

RECEIVED: October 17, 2011

API Well Number: 43047520770000

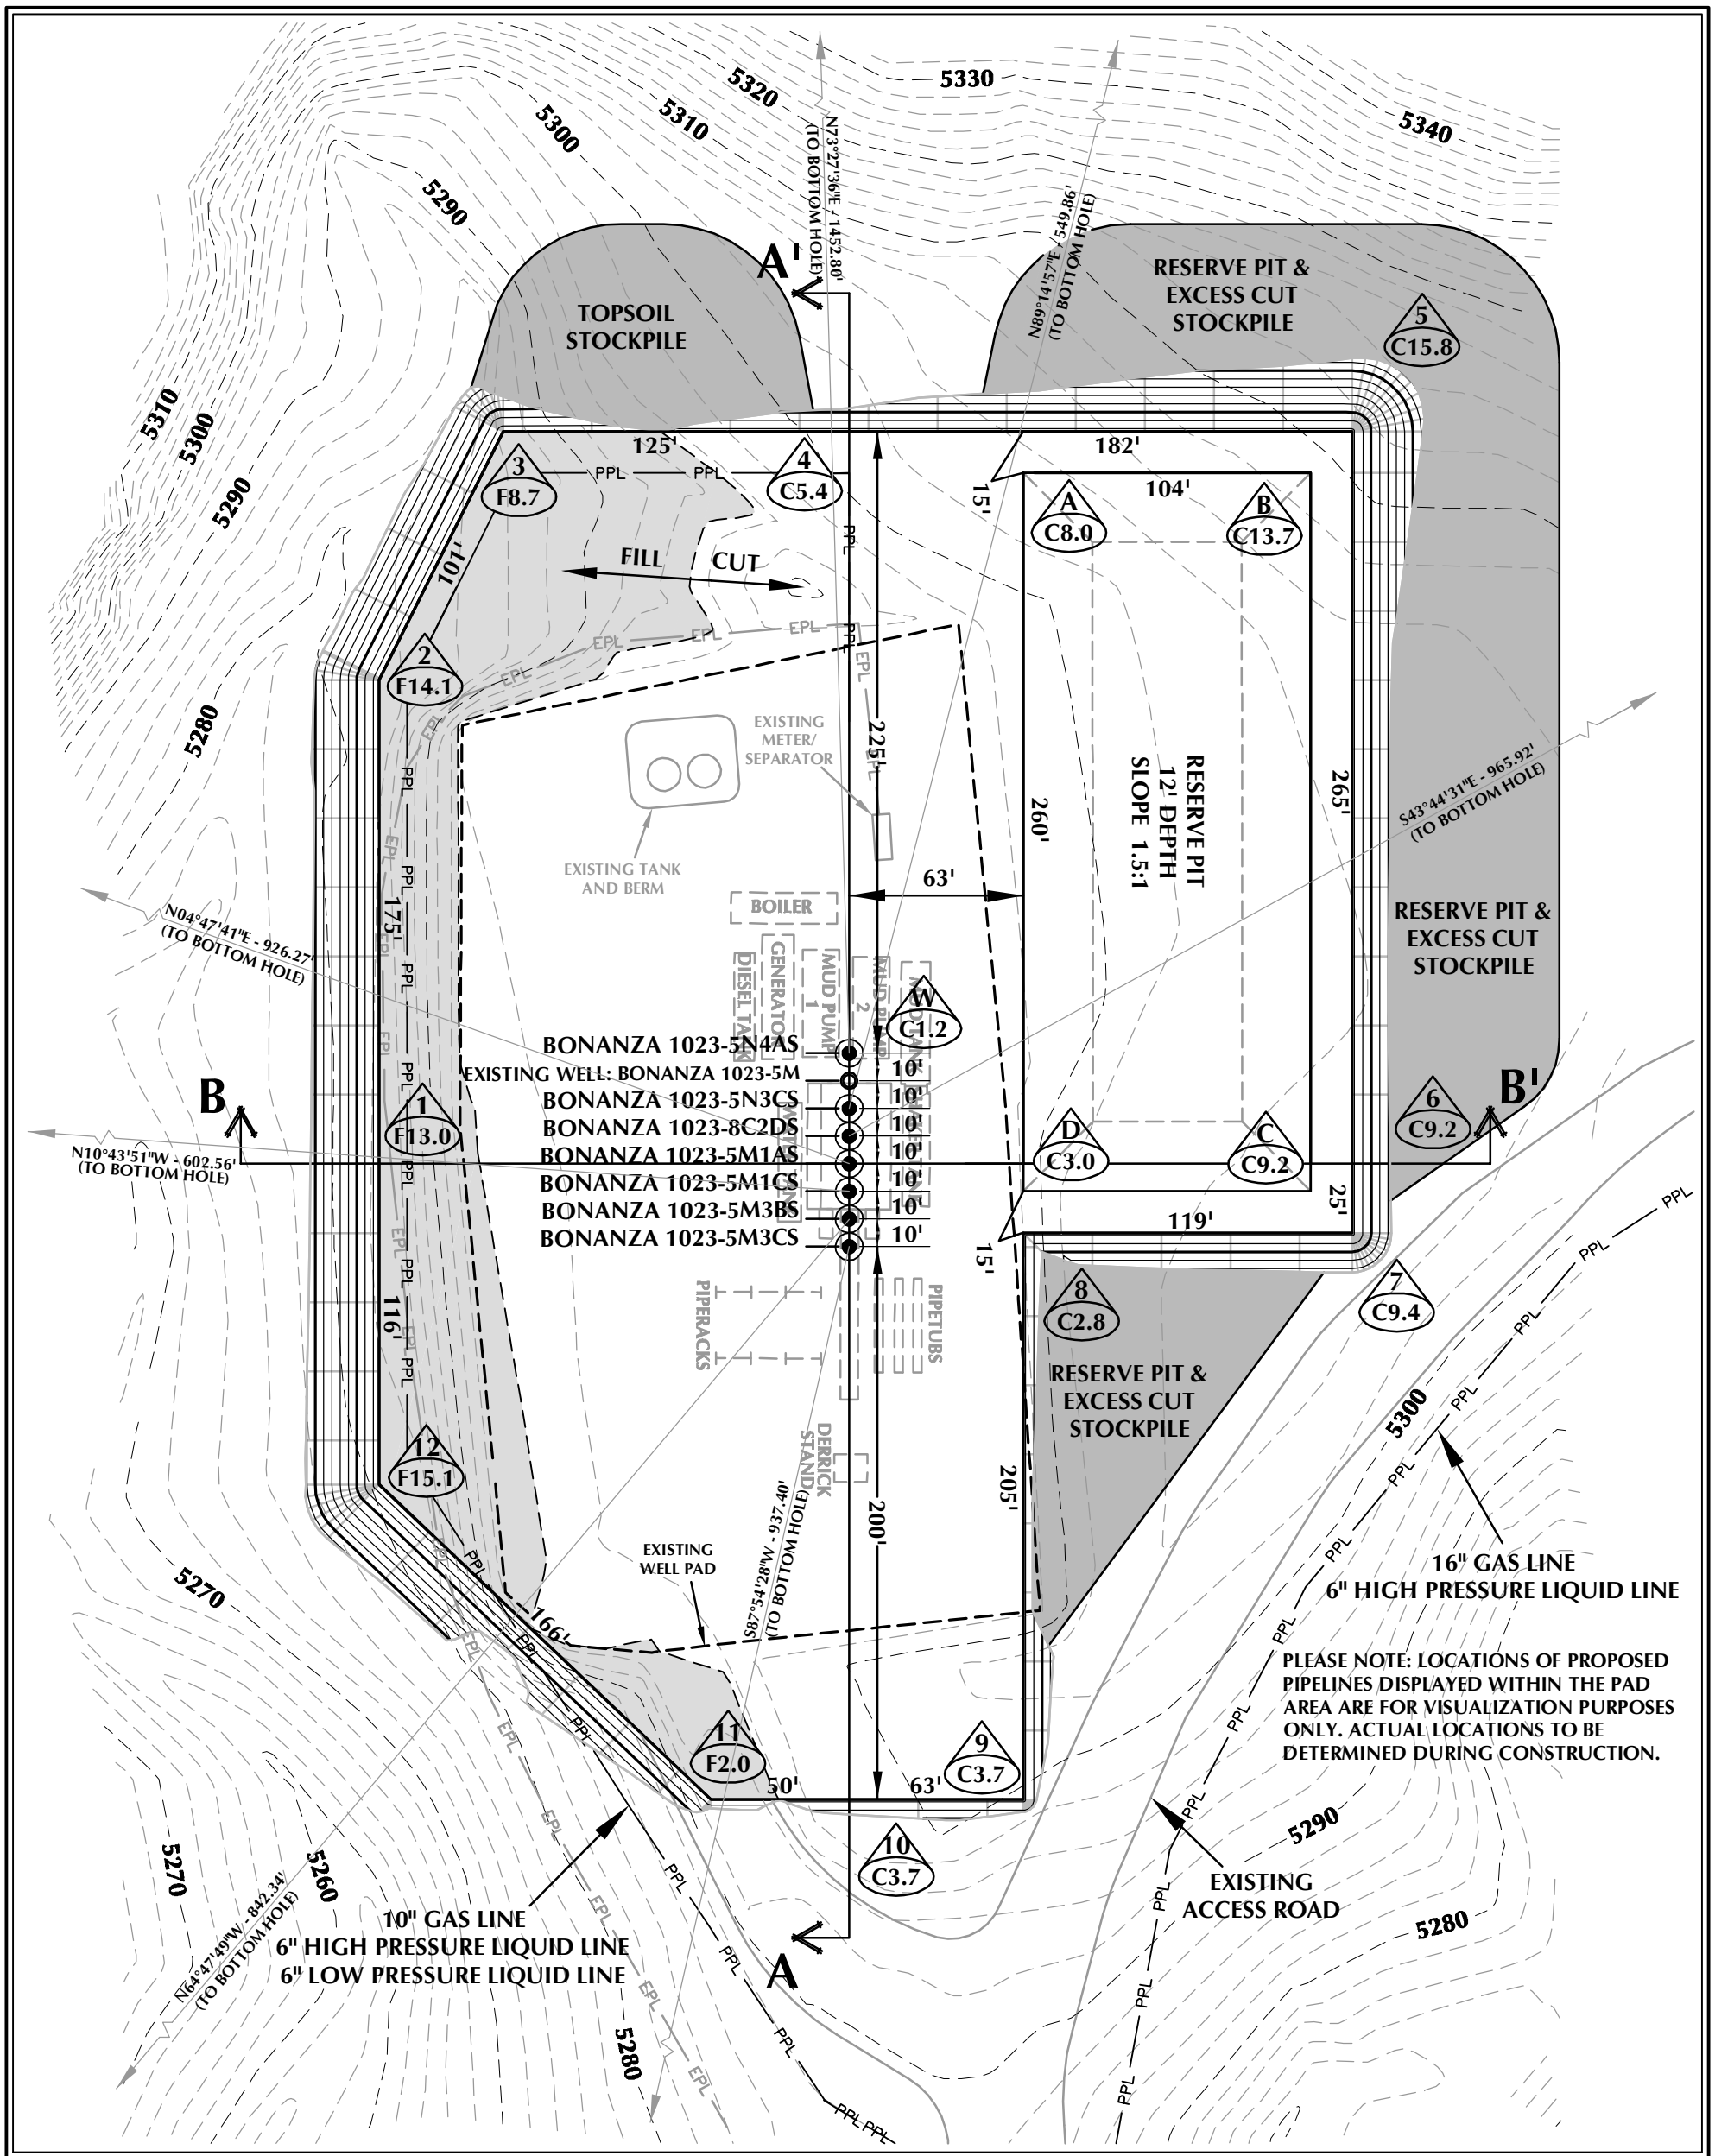

WELL PAD - BONANZA 1023-5M DESIGN SUMMARY

EXISTING GRADE @ CENTER OF WELL PAD = 5296.6'
FINISHED GRADE ELEVATION = 5295.4'
CUT SLOPES = 1.5:1
FILL SLOPES = 1.5:1
TOTAL WELL PAD AREA = 3.82 ACRES
TOTAL DAMAGE AREA = 6.69 ACRES
SHRINKAGE FACTOR = 1.10
SWELL FACTOR = 1.00

Kerr-McGee Oil & Gas Onshore, LP
1099 18th Street - Denver, Colorado 80202

WELL PAD - BONANZA 1023-5M

WELL PAD - LOCATION LAYOUT
BONANZA 1023-5M3CS, BONANZA 1023-5M3BS,
BONANZA 1023-5M1CS, BONANZA 1023-5M1AS,
BONANZA 1023-8C2DS, BONANZA 1023-5N3CS
& BONANZA 1023-5N4AS
LOCATED IN SECTION 5, T10S, R23E,
S.L.B.&M., UINTAH COUNTY, UTAH

WELL PAD QUANTITIES

TOTAL CUT FOR WELL PAD = 15,605 C.Y.
TOTAL FILL FOR WELL PAD = 9,313 C.Y.
TOPSOIL @ 6" DEPTH = 1,881 C.Y.
EXCESS MATERIAL = 6,292 C.Y.

RESERVE PIT QUANTITIES

TOTAL CUT FOR RESERVE PIT
+/- 9,300 CY
RESERVE PIT CAPACITY (2' OF FREEBOARD)
+/- 35,480 BARRELS

WELL PAD LEGEND

- EXISTING WELL LOCATION
- PROPOSED WELL LOCATION
- PROPOSED BOTTOM HOLE LOCATION
- EXISTING CONTOURS (2' INTERVAL)
- PROPOSED CONTOURS (2' INTERVAL)
- PPL — PROPOSED PIPELINE
- EPL — EXISTING PIPELINE

HORIZONTAL 0 30 60 1" = 60'
2' CONTOURS

609 CONSULTING, LLC
371 Coffeen Avenue
Sheridan, WY 82801
Phone 307-674-0609
Fax 307-674-0182

TIMBERLINE (435) 789-1365
ENGINEERING & LAND SURVEYING, INC.
209 NORTH 300 WEST - VERNAL, UTAH 84078

Scale: 1"=60' | Date: 3/30/10 | SHEET NO: 9 9 OF 19
REVISED: TAR 10/14/10

C:\ANADARKO\2010_11_BON_FOCUS_SEC_5-1023\DWGS\BONANZA 1023-5M\1023-5M_20100601.dwg, 10/14/2010 1:43:37 PM

API Well Number: 43047520770000

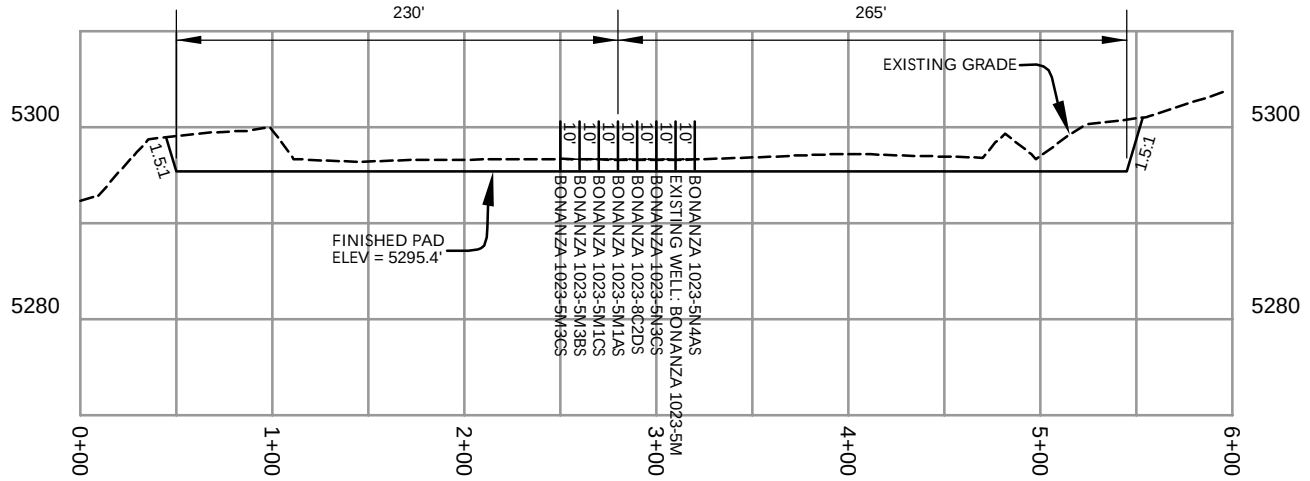

CROSS SECTION A-A'

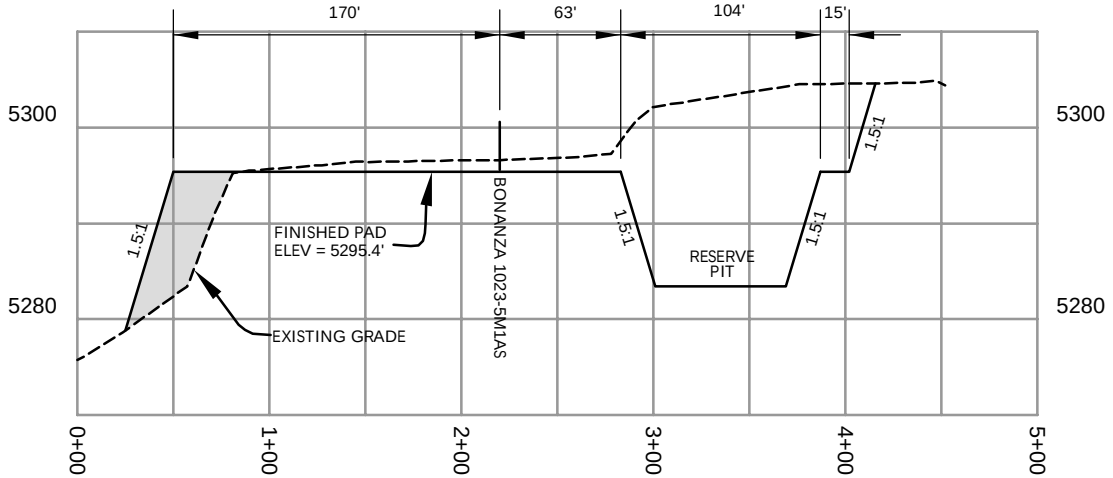

CROSS SECTION B-B'

NOTE: CROSS SECTION B-B' DEPICTS MAXIMUM RESERVE PIT DEPTH.

Kerr-McGee Oil & Gas Onshore, LP
1099 18th Street - Denver, Colorado 80202

WELL PAD - BONANZA 1023-5M

WELL PAD - CROSS SECTIONS
BONANZA 1023-5M3CS, BONANZA 1023-5M3BS,
BONANZA 1023-5M1CS, BONANZA 1023-5M1AS,
BONANZA 1023-8C2DS, BONANZA 1023-5N3CS
& BONANZA 1023-5N4AS
LOCATED IN SECTION 5, T10S, R23E,
S.L.B.&M., UINTAH COUNTY, UTAH

609 CONSULTING, LLC
371 Coffeen Avenue
Sheridan, WY 82801
Phone 307-674-0609
Fax 307-674-0182

TIMBERLINE (435) 789-1365
ENGINEERING & LAND SURVEYING, INC.
209 NORTH 300 WEST - VERNAL, UTAH 84078

HORIZONTAL 0 50 100 1" = 100'
VERTICAL 0 10 20 1" = 20'

Scale: 1"=100'	Date: 3/30/10	SHEET NO:
REVISED:	SEA 6/25/10	10 10 OF 19

K:\ANADARKO\2010_11_BON_FOCUS_SEC_5-1023\DWGS\BONANZA_1023-5M\1023-5M_20100601.dwg, 7/28/2010 10:16:09 AM

RECEIVED: October 17, 2011

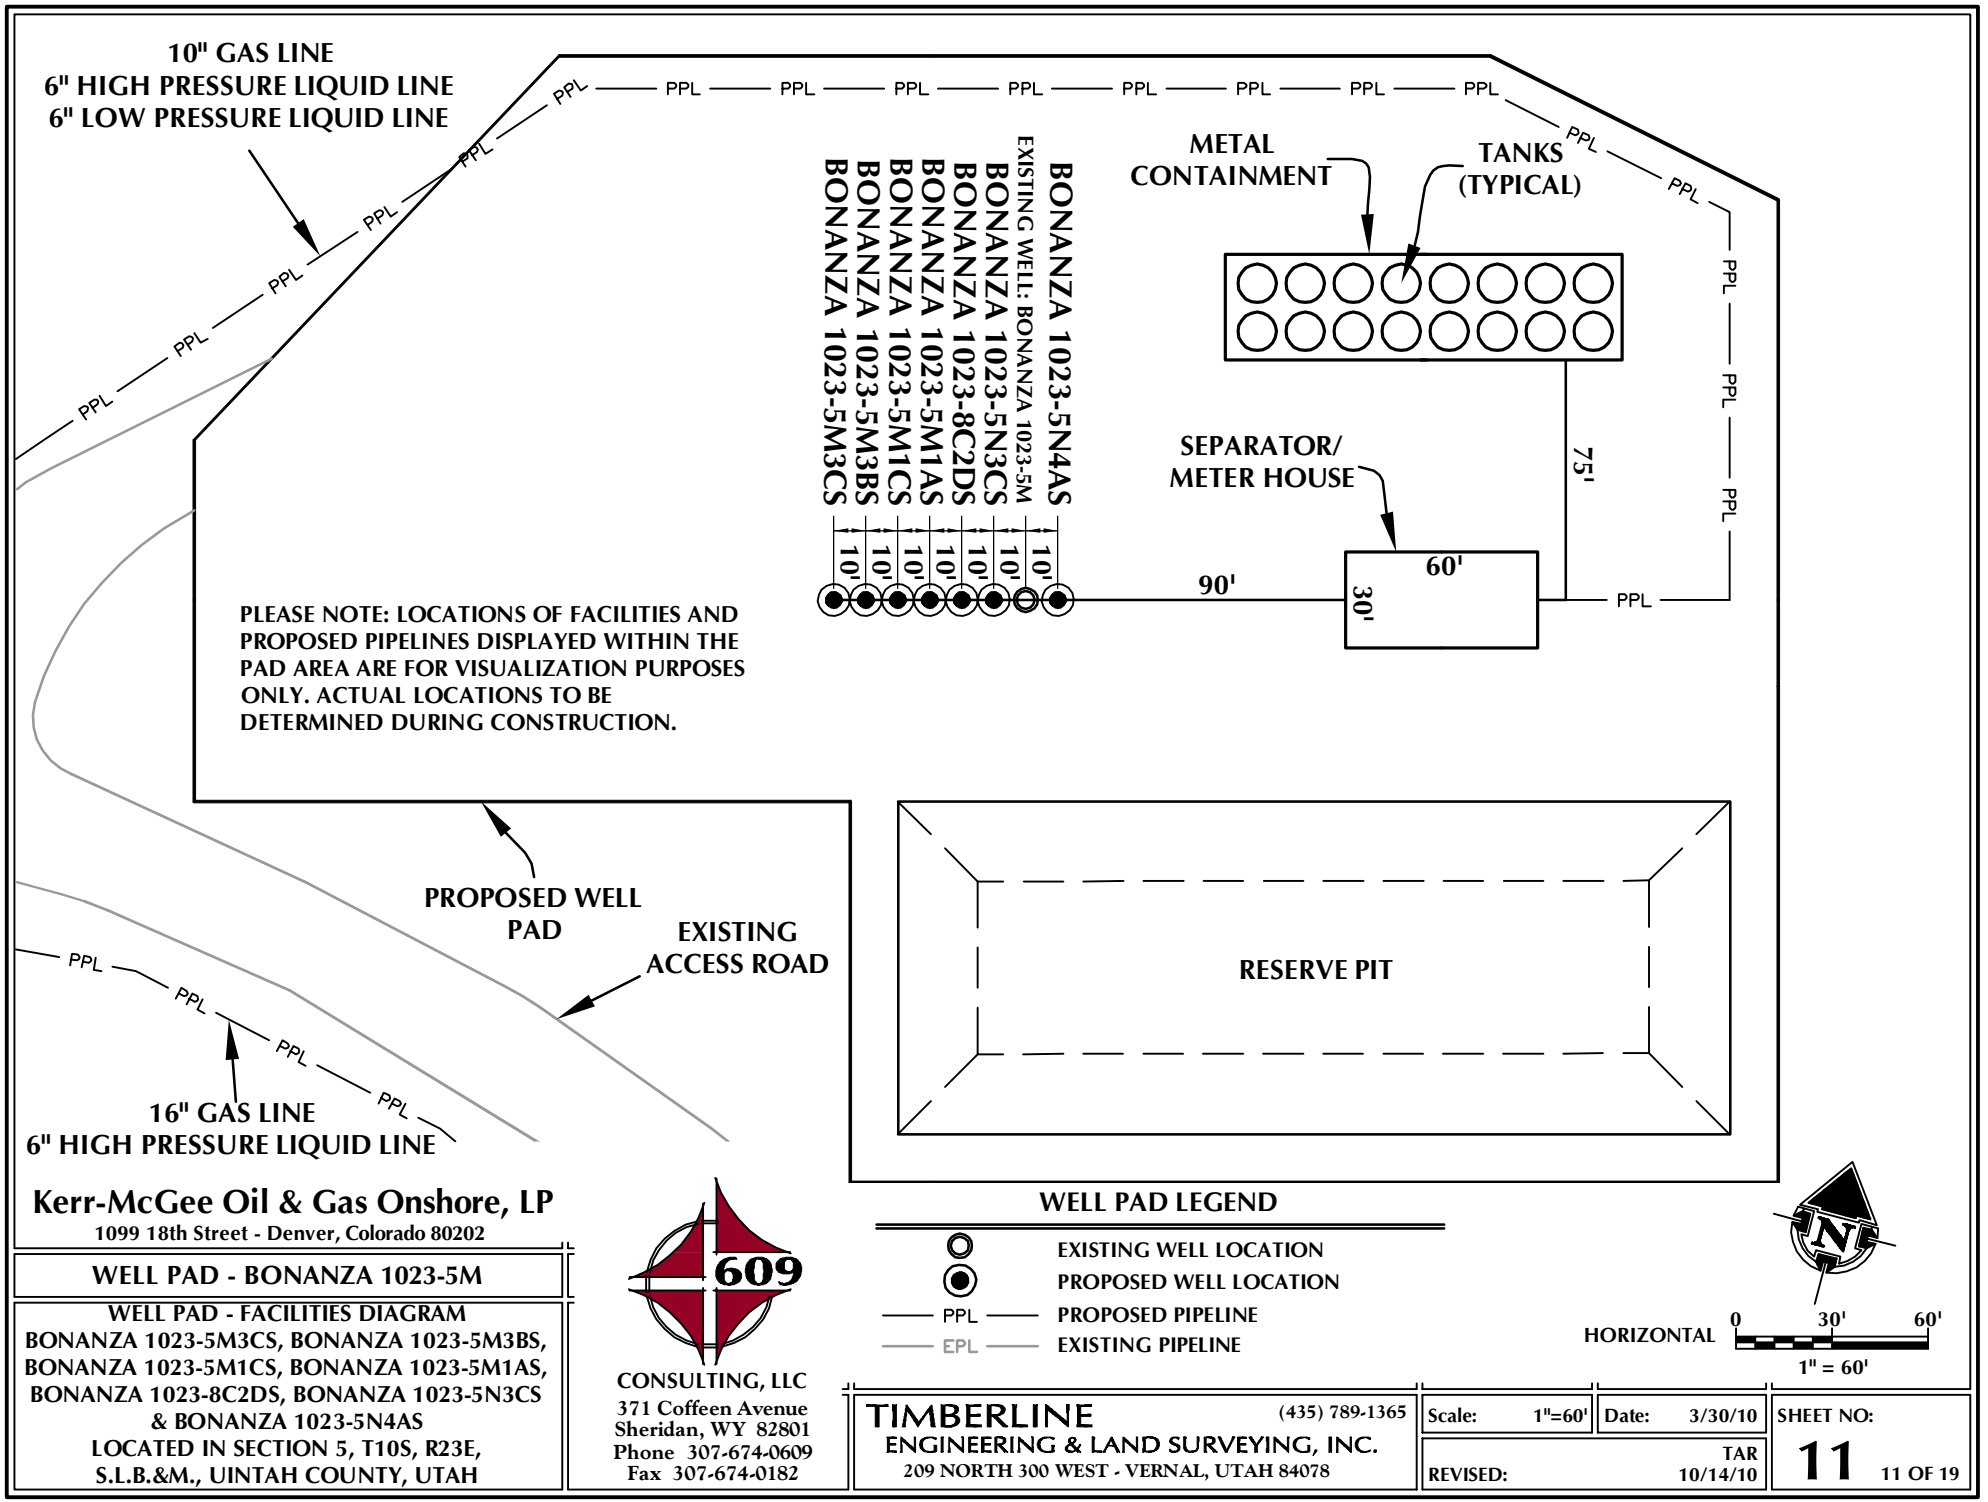

Kerr-McGee Oil & Gas Onshore, LP
1099 18th Street - Denver, Colorado 80202

WELL PAD - BONANZA 1023-5M

WELL PAD - FACILITIES DIAGRAM
BONANZA 1023-5M3CS, BONANZA 1023-5M3BS, BONANZA 1023-5M1CS, BONANZA 1023-5M1AS, BONANZA 1023-8C2DS, BONANZA 1023-5N3CS & BONANZA 1023-5N4AS
LOCATED IN SECTION 5, T10S, R23E, S.L.B.&M., UINTAH COUNTY, UTAH

609 CONSULTING, LLC
371 Coffeen Avenue
Sheridan, WY 82801
Phone 307-674-0609
Fax 307-674-0182

WELL PAD LEGEND

- EXISTING WELL LOCATION
- PROPOSED WELL LOCATION
- PPL — PROPOSED PIPELINE
- EPL — EXISTING PIPELINE

HORIZONTAL 0 30' 60'
1" = 60'

TIMBERLINE ENGINEERING & LAND SURVEYING, INC.
209 NORTH 300 WEST - VERNAL, UTAH 84078
(435) 789-1365

Scale:	1"=60'	Date:	3/30/10	SHEET NO:
REVISED:		TAR 10/14/10		11 11 OF 19

K:\ANADARKO\2010_11_BON_FOCUS_SEC_5-10S23\DWGS\BONANZA 1023-5M\1023-5M_20100601.dwg, 10/14/2010 5:33:55 PM

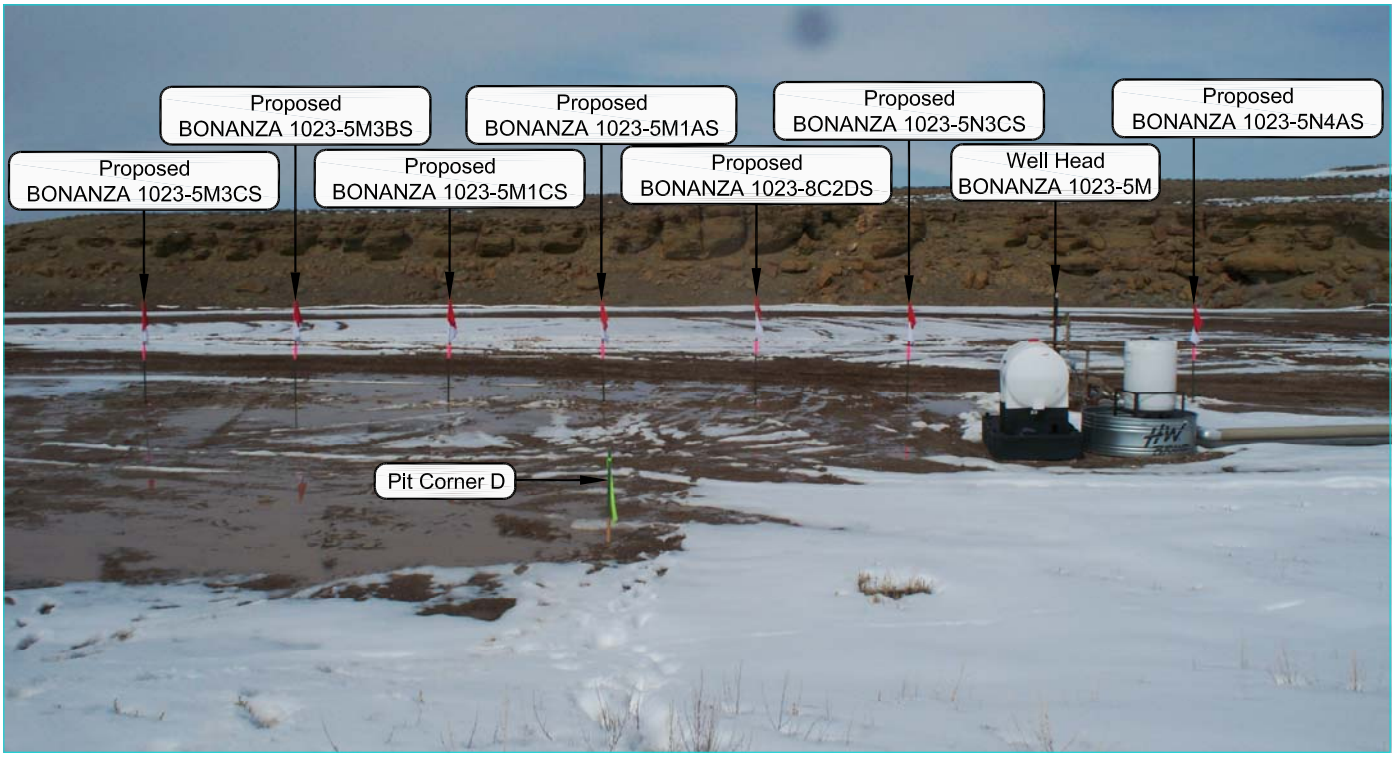

PHOTO VIEW: FROM PIT CORNER D TO LOCATION STAKE **CAMERA ANGLE: NORTHWESTERLY**

PHOTO VIEW: FROM EXISTING ACCESS ROAD **CAMERA ANGLE: NORTHEASTERLY**

Kerr-McGee Oil & Gas Onshore, LP
1099 18th Street - Denver, Colorado 80202

WELL PAD - BONANZA 1023-5M

LOCATION PHOTOS
BONANZA 1023-5M3CS, BONANZA 1023-5M3BS, BONANZA 1023-5M1CS, BONANZA 1023-5M1AS, BONANZA 1023-8C2DS, BONANZA 1023-5N3CS & BONANZA 1023-5N4AS
LOCATED IN SECTION 5, T10S, R23E, S.L.B.&M., UINTAH COUNTY, UTAH.

609
CONSULTING, LLC
371 Coffeen Avenue
Sheridan WY 82801
Phone 307-674-0609
Fax 307-674-0182

TIMBERLINE (435) 789-1365
ENGINEERING & LAND SURVEYING, INC.
209 NORTH 300 WEST - VERNAL, UTAH 84078

DATE PHOTOS TAKEN: 03-10-10	PHOTOS TAKEN BY: D.J.S.	SHEET NO: 12
DATE DRAWN: 03-12-10	DRAWN BY: E.M.S.	12 OF 19
Date Last Revised:		

RECEIVED: October 17, 2011

API Well Number: 43047520770000

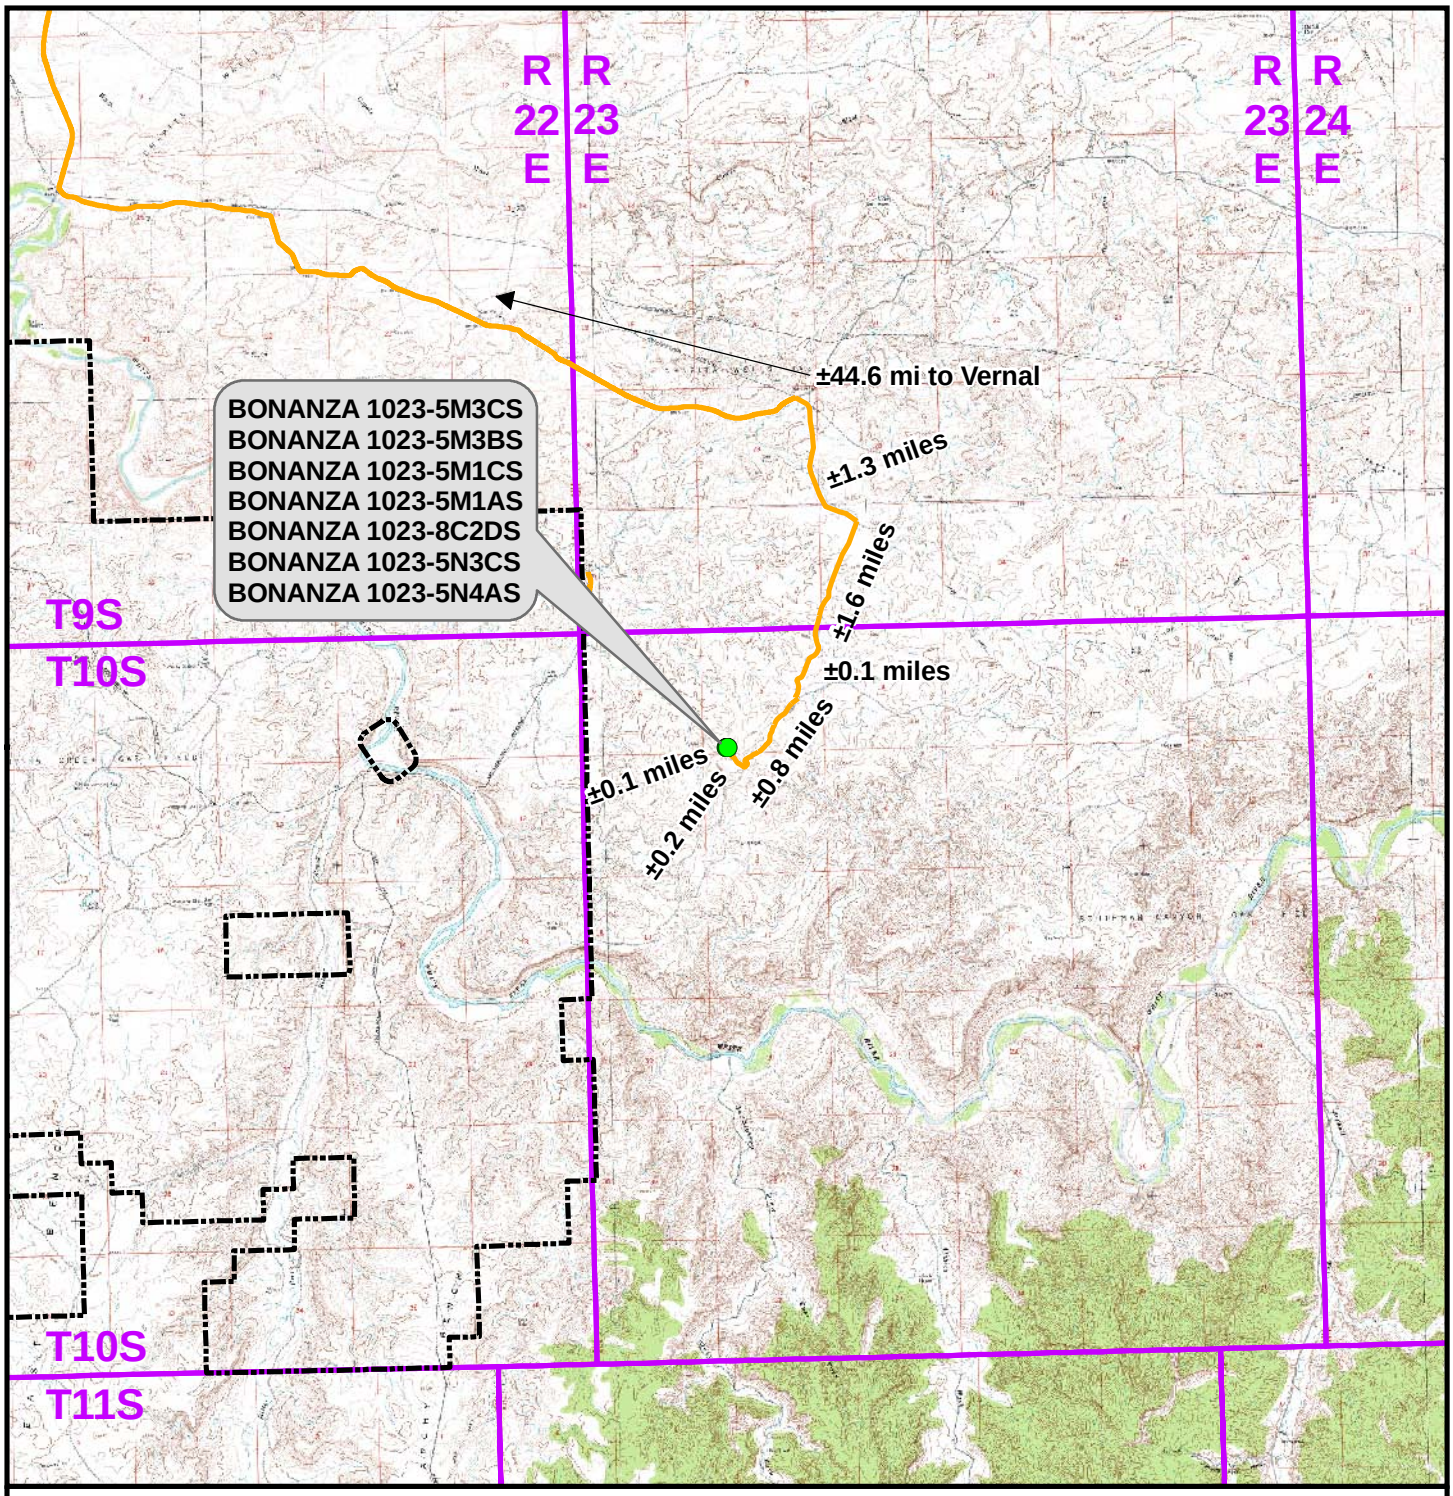

Legend

Distance From Well Pad - BONANZA 1023-5M To Unit Boundary: ±5,922ft

Proposed Well Location

Natural Buttes Unit Boundary

Access Route - Proposed

Kerr-McGee Oil & Gas Onshore, LP
1099 18th Street, Denver, Colorado 80202

WELL PAD - BONANZA 1023-5M

TOPO A
BONANZA 1023-5M3CS, BONANZA 1023-5M3BS,
BONANZA 1023-5M1CS, BONANZA 1023-5M1AS,
BONANZA 1023-8C2DS, BONANZA 1023-5N3CS &
BONANZA 1023-5N4AS
LOCATED IN SECTION 5, T10S, R23E
S.L.B.&M., UINTAH COUNTY, UTAH

609 CONSULTING, LLC
371 Coffeen Avenue
Sheridan, WY 82801
Phone (307) 674-0609
Fax (307) 674-0182

N

Scale: 1:100,000	NAD83 USP Central	Sheet No: 13 13 of 19	
Drawn: CPS	Date: 31 Mar 2010		
Revised: CPS	Date: 25 June 2010		

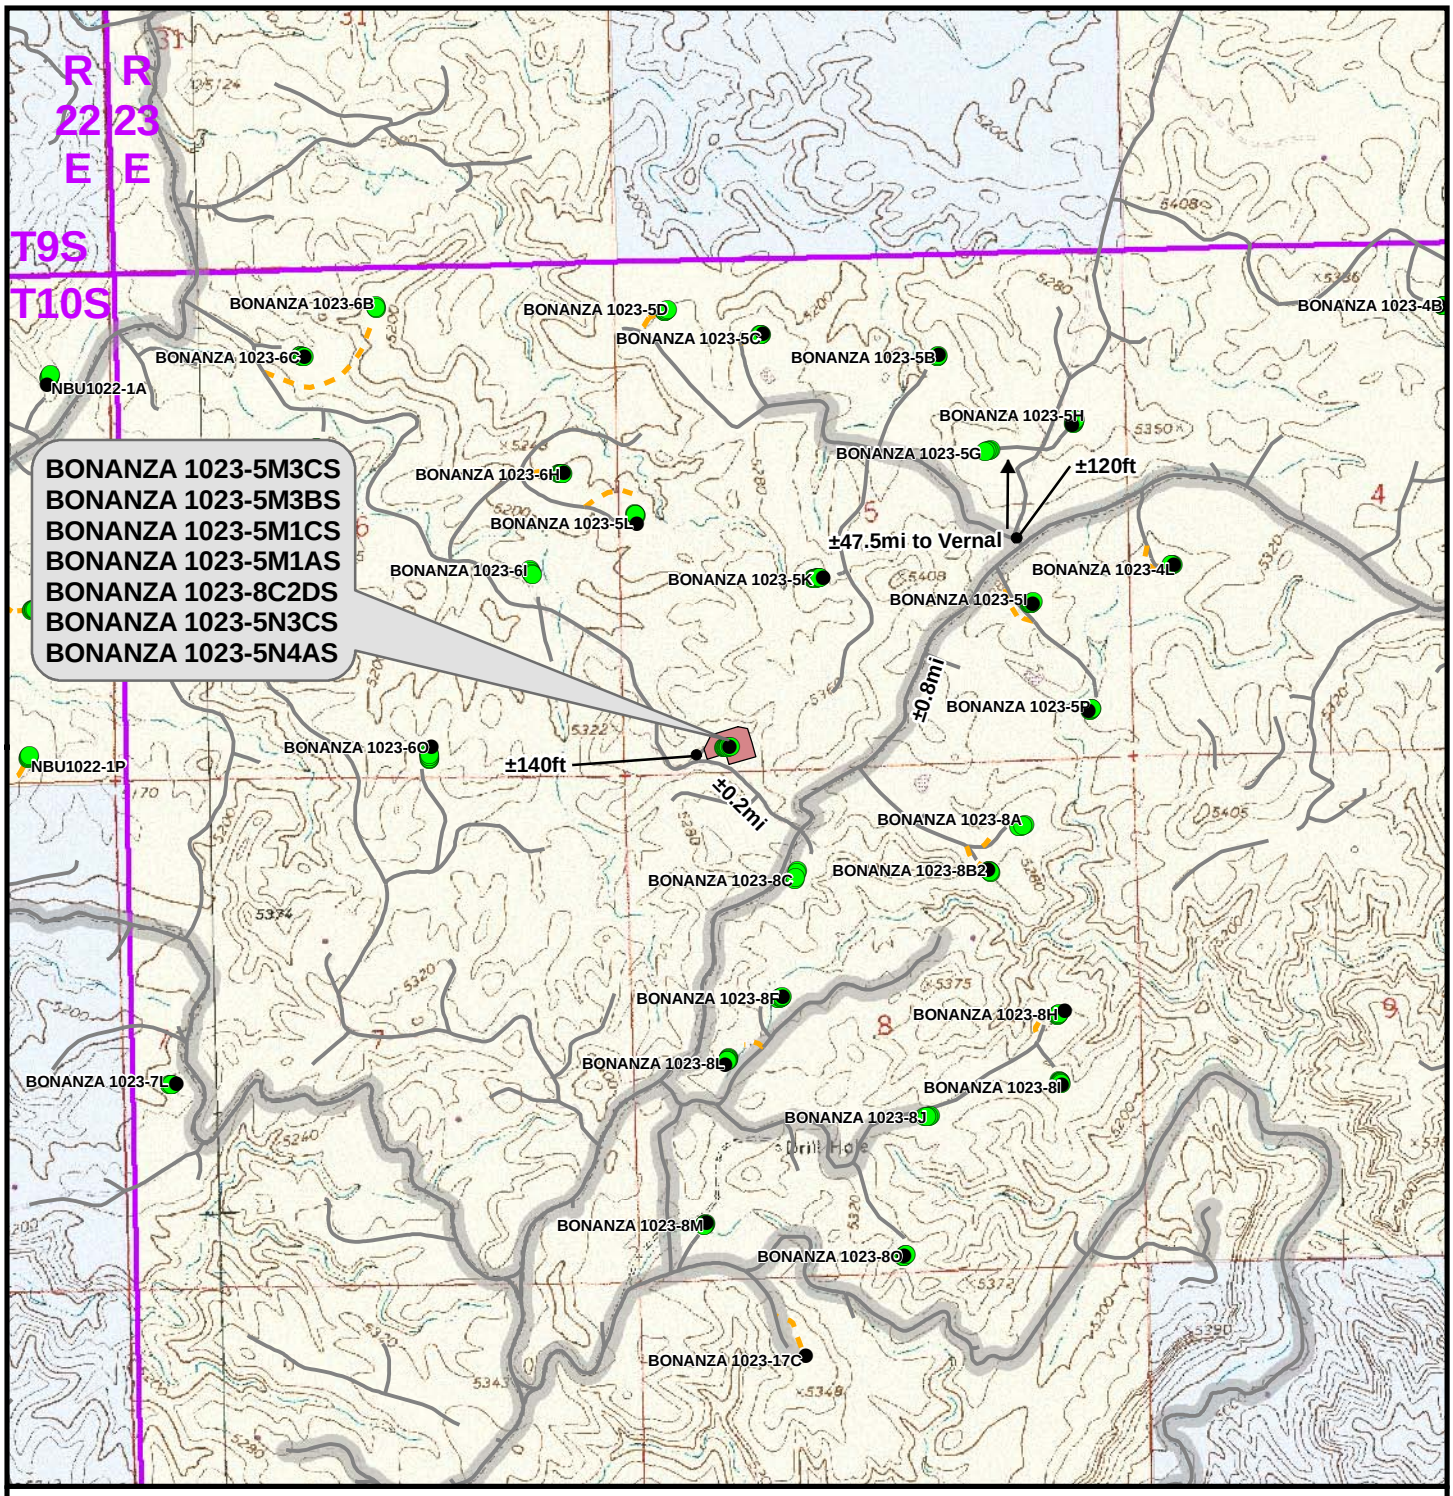

Legend

Total Proposed Road Length: ±0ft

Well - Proposed	Well Pad	Road - Proposed	County Road	Bureau of Land Management	State
Well - Existing		Road - Existing		Indian Reservation	Private

Kerr-McGee Oil & Gas Onshore, LP
1099 18th Street, Denver, Colorado 80202

WELL PAD - BONANZA 1023-5M

TOPO B
BONANZA 1023-5M3CS, BONANZA 1023-5M3BS,
BONANZA 1023-5M1CS, BONANZA 1023-5M1AS,
BONANZA 1023-8C2DS, BONANZA 1023-5N3CS &
BONANZA 1023-5N4AS
LOCATED IN SECTION 5, T10S, R23E
S.L.B.&M., UINTAH COUNTY, UTAH

609 CONSULTING, LLC
371 Coffeen Avenue
Sheridan, WY 82801
Phone (307) 674-0609
Fax (307) 674-0182

N

Scale: 1" = 2,000ft	NAD83 USP Central	Sheet No: 14	14 of 19
Drawn: CPS	Date: 31 Mar 2010		
Revised: CPS	Date: 25 June 2010		

RECEIVED: October 17, 2011

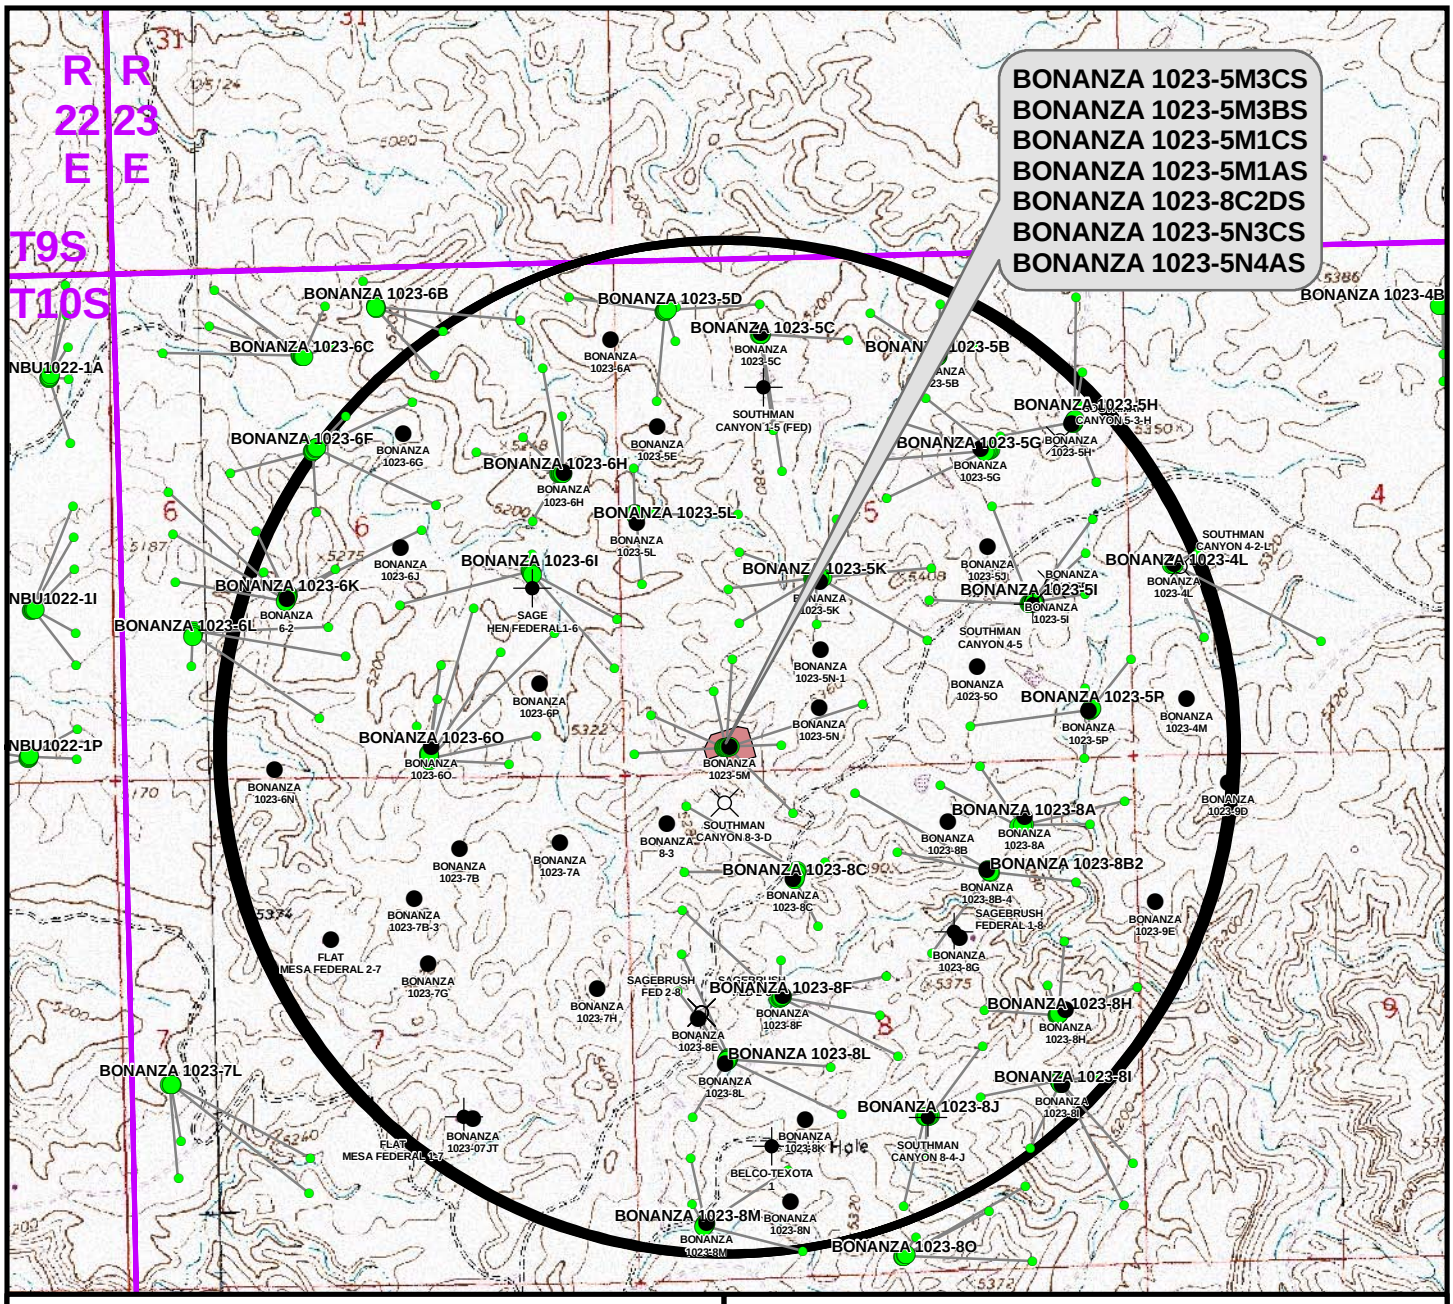

Proposed Well	Nearest Well Bore	Footage
BONANZA 1023-5M3CS	BONANZA 8-3	811ft
BONANZA 1023-5M3BS	BONANZA 1023-5M	881ft
BONANZA 1023-5M1CS	BONANZA 1023-5M	601ft
BONANZA 1023-5M1AS	BONANZA 1023-5M	916ft

Proposed Well	Nearest Well Bore	Footage
BONANZA 1023-8C2DS	BONANZA 1023-8C	685ft
BONANZA 1023-5N3CS	BONANZA 1023-5M	540ft
BONANZA 1023-5N4AS	BONANZA 1023-5N	455ft

Legend

- Well - Proposed
- Bottom Hole - Proposed
- Well Path
- Well Pad
- Well - 1 Mile Radius

Well locations derived from State of Utah, Dept. of Natural Resources, Division of Oil, Gas and Mining

- Producing
- Active
- Spudded (Drilling commenced: Not yet completed)
- Approved permit (APD); not yet spudded
- New Permit (Not yet approved or drilled)
- Inactive
- Drilling Operations Suspended
- Temporarily-Abandoned
- Shut-In
- Plugged and Abandoned
- Location Abandoned
- Dry hole marker, buried
- Returned APD (Unapproved)

Kerr-McGee Oil & Gas Onshore, LP
1099 18th Street, Denver, Colorado 80202

WELL PAD - BONANZA 1023-5M

TOPO C
BONANZA 1023-5M3CS, BONANZA 1023-5M3BS,
BONANZA 1023-5M1CS, BONANZA 1023-5M1AS,
BONANZA 1023-8C2DS, BONANZA 1023-5N3CS &
BONANZA 1023-5N4AS
LOCATED IN SECTION 5, T10S, R23E
S.L.B.&M., UINTAH COUNTY, UTAH

609 CONSULTING, LLC
371 Coffeen Avenue
Sheridan, WY 82801
Phone (307) 674-0609
Fax (307) 674-0182

N

Scale: 1" = 2,000ft	NAD83 USP Central	Sheet No: 15 of 19
Drawn: CPS	Date: 30 Mar 2010	
Revised: CPS	Date: 25 June 2010	

RECEIVED: October 17, 2011

API Well Number: 43047520770000

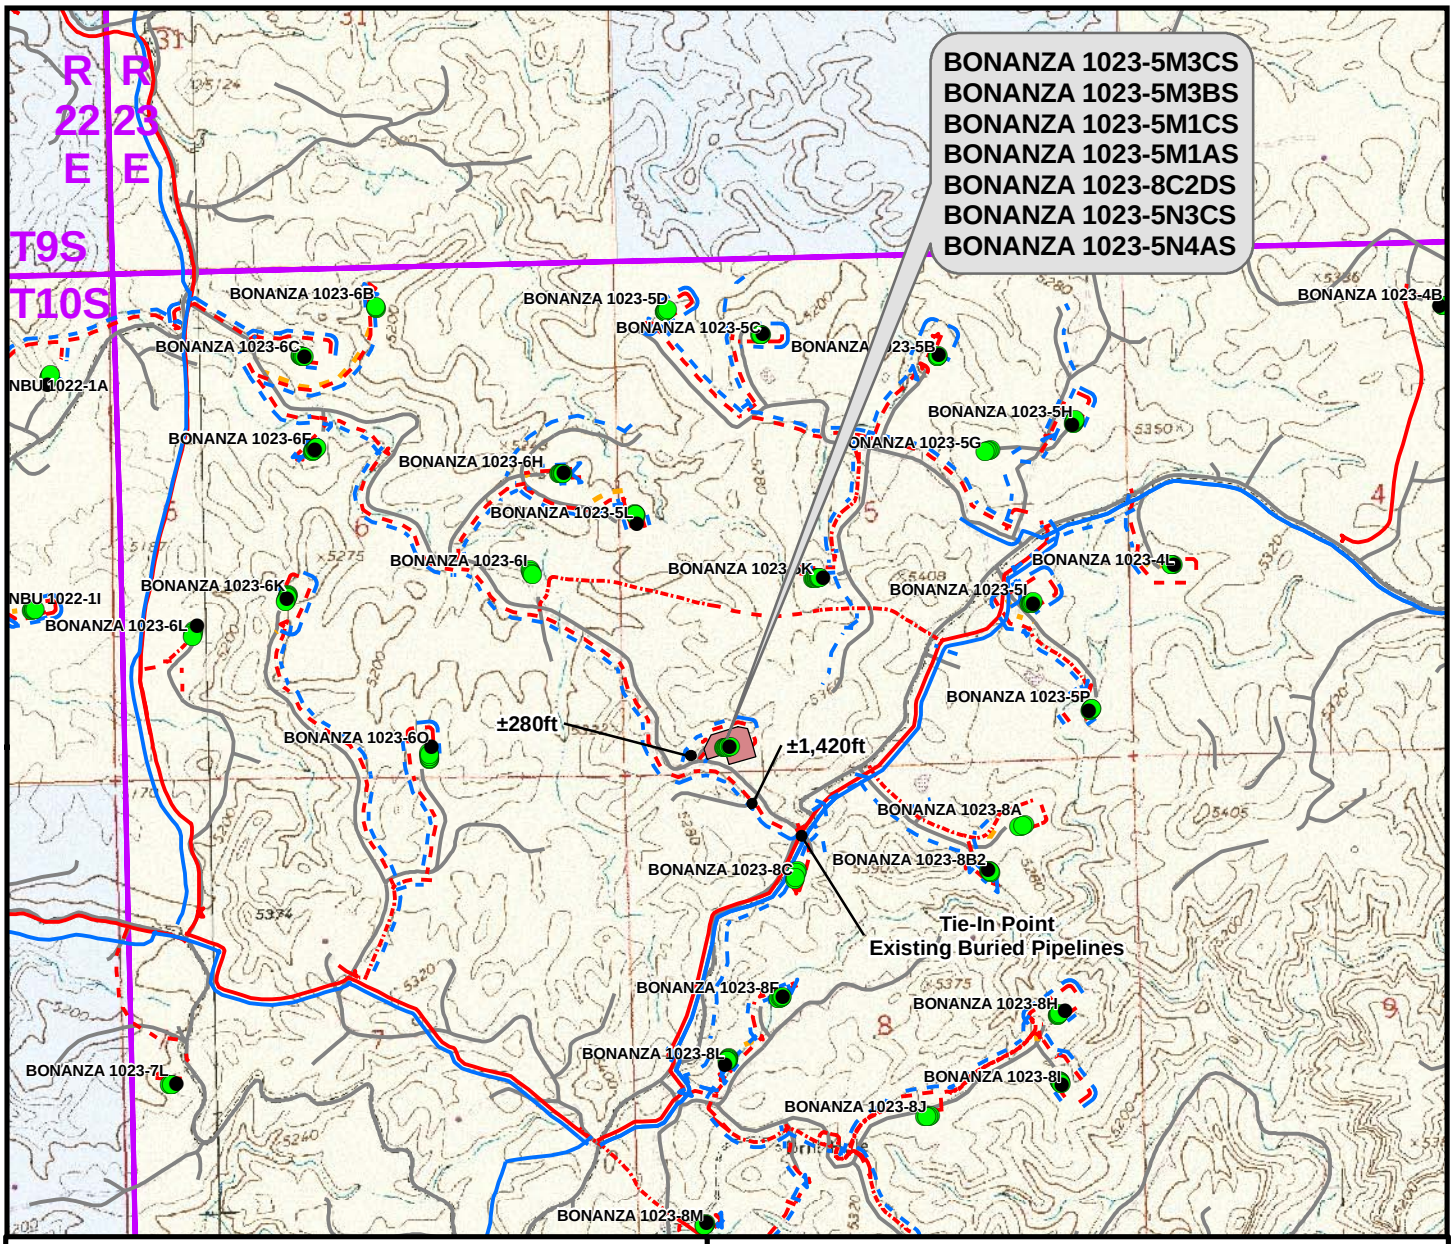

Proposed Liquid Pipeline	Length
Proposed 6" (Meter House to Edge of Pad)	±700ft
Proposed 6" (Edge of Pad to Existing 6" Buried Pipeline)	±1,700ft
TOTAL PROPOSED LIQUID PIPELINE =	±2,400ft

Proposed Gas Pipeline	Length
Proposed 10" (Meter House to Edge of Pad)	±700ft
Proposed 10" (Edge of Pad to Proposed 16" Pipeline)	±280ft
Proposed 16" (Proposed 16" Pipeline to Existing 16" Buried Pipeline)	±1,420ft
TOTAL PROPOSED GAS PIPELINE =	±2,400ft

Legend

- Well - Proposed
- Well - Existing
- Well Pad
- Gas Pipeline - Proposed
- Gas Pipeline - To Be Upgraded
- Gas Pipeline - Existing
- Liquid Pipeline - Proposed
- Liquid Pipeline - To Be Upgraded
- Liquid Pipeline - Existing
- Road - Proposed
- Road - Existing
- Bureau of Land Management
- Indian Reservation
- State
- Private

Kerr-McGee Oil & Gas Onshore, LP
1099 18th Street, Denver, Colorado 80202

WELL PAD - BONANZA 1023-5M

TOPO D
BONANZA 1023-5M3CS, BONANZA 1023-5M3BS,
BONANZA 1023-5M1CS, BONANZA 1023-5M1AS,
BONANZA 1023-8C2DS, BONANZA 1023-5N3CS &
BONANZA 1023-5N4AS
LOCATED IN SECTION 5, T10S, R23E
S.L.B.&M., UINTAH COUNTY, UTAH

609 CONSULTING, LLC
371 Coffeen Avenue
Sheridan, WY 82801
Phone (307) 674-0609
Fax (307) 674-0182

N

Scale: 1" = 2,000ft	NAD83 USP Central	Sheet No:
Drawn: CPS	Date: 25 Mar 2010	16 of 19
Revised: CPS	Date: 15 Oct 2010	

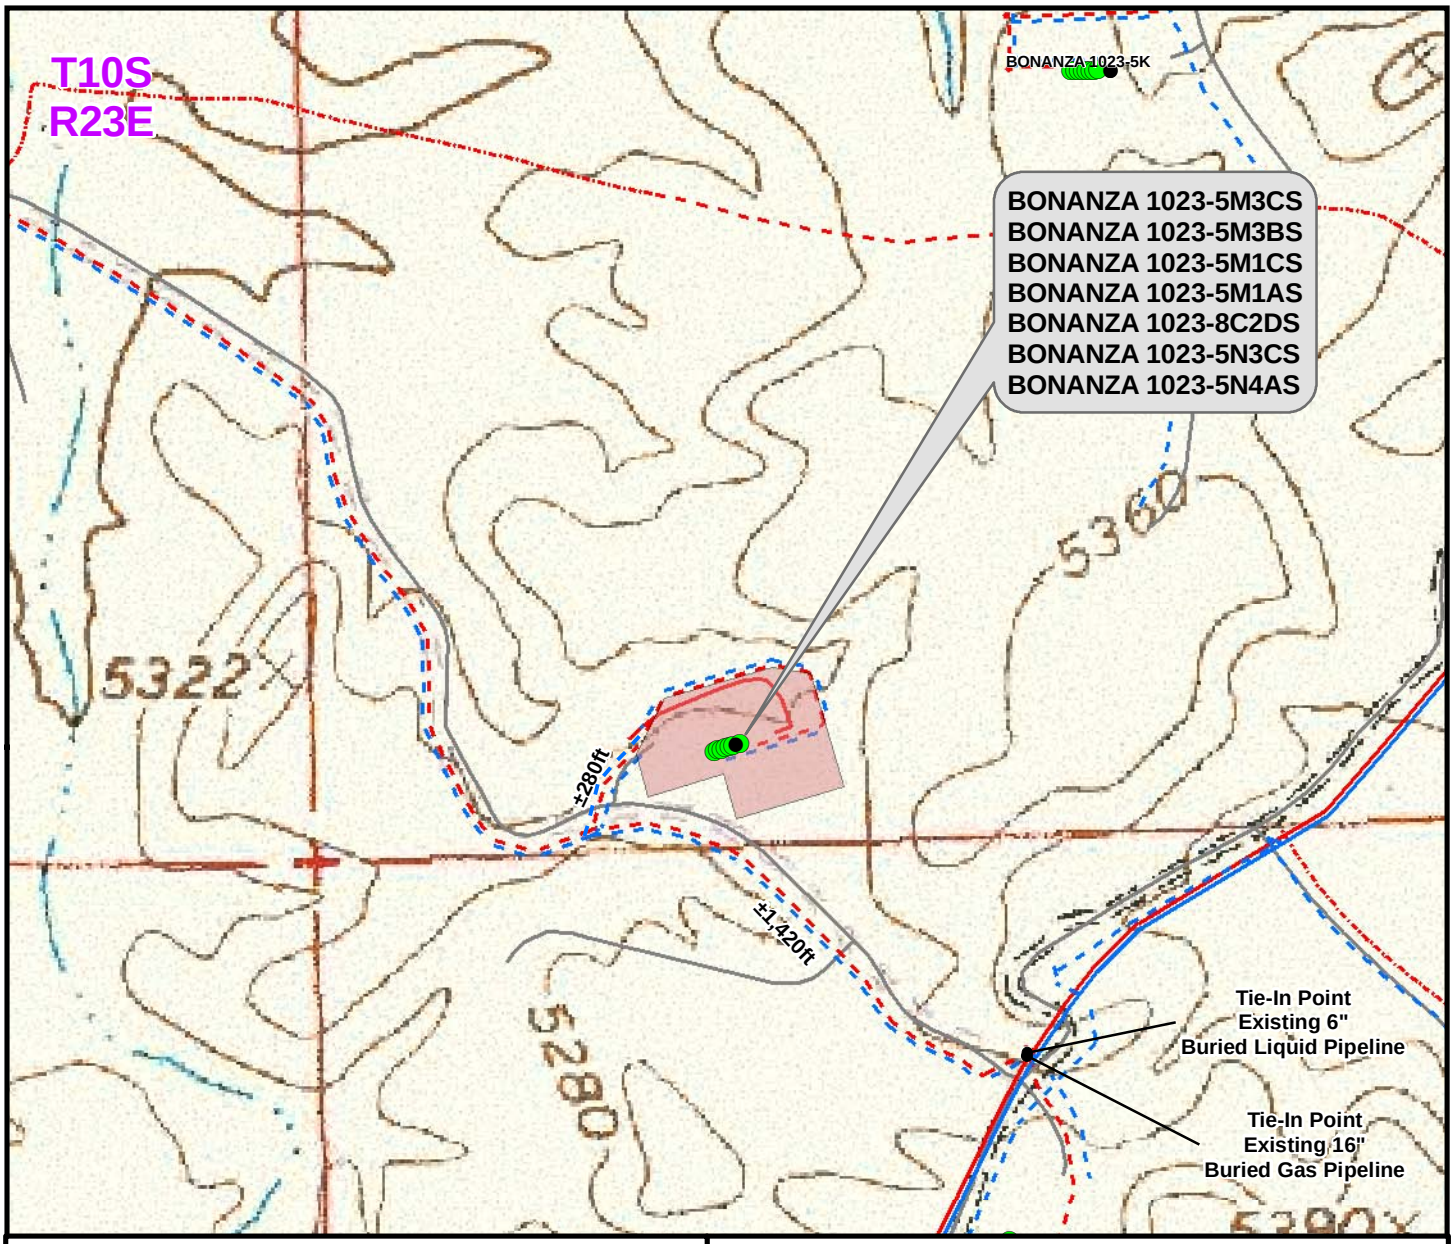

Proposed Liquid Pipeline	Length
Proposed 6" (Meter House to Edge of Pad)	±700ft
Proposed 6" (Edge of Pad to Existing 6" Buried Pipeline)	±1,700ft
TOTAL PROPOSED LIQUID PIPELINE =	±2,400ft

Proposed Gas Pipeline	Length
Proposed 10" (Meter House to Edge of Pad)	±700ft
Proposed 10" (Edge of Pad to Proposed 16" Pipeline)	±280ft
Proposed 16" (Proposed 16" Pipeline to Existing 16" Buried Pipeline)	±1,420ft
TOTAL PROPOSED GAS PIPELINE =	±2,400ft

Legend

- Well - Proposed
- Well - Existing
- Well Pad
- Gas Pipeline - Proposed
- Gas Pipeline - To Be Upgraded
- Gas Pipeline - Existing
- Liquid Pipeline - Proposed
- Liquid Pipeline - To Be Upgraded
- Liquid Pipeline - Existing
- Road - Proposed
- Road - Existing
- Bureau of Land Management
- Indian Reservation
- State
- Private

Kerr-McGee Oil & Gas Onshore, LP
1099 18th Street, Denver, Colorado 80202

WELL PAD - BONANZA 1023-5M

TOPO D (PAD & PIPELINE DETAIL)
BONANZA 1023-5M3CS, BONANZA 1023-5M3BS,
BONANZA 1023-5M1CS, BONANZA 1023-5M1AS,
BONANZA 1023-8C2DS, BONANZA 1023-5N3CS &
BONANZA 1023-5N4AS
LOCATED IN SECTION 5, T10S, R23E
S.L.B.&M., UINTAH COUNTY, UTAH

609 CONSULTING, LLC
371 Coffeen Avenue
Sheridan, WY 82801
Phone (307) 674-0609
Fax (307) 674-0182

N

Scale: 1" = 500ft	NAD83 USP Central	Sheet No: 17 of 19
Drawn: CPS	Date: 25 Mar 2010	
Revised: CPS	Date: 15 Oct 2010	

RECEIVED: October 17, 2011

API Well Number: 43047520770000

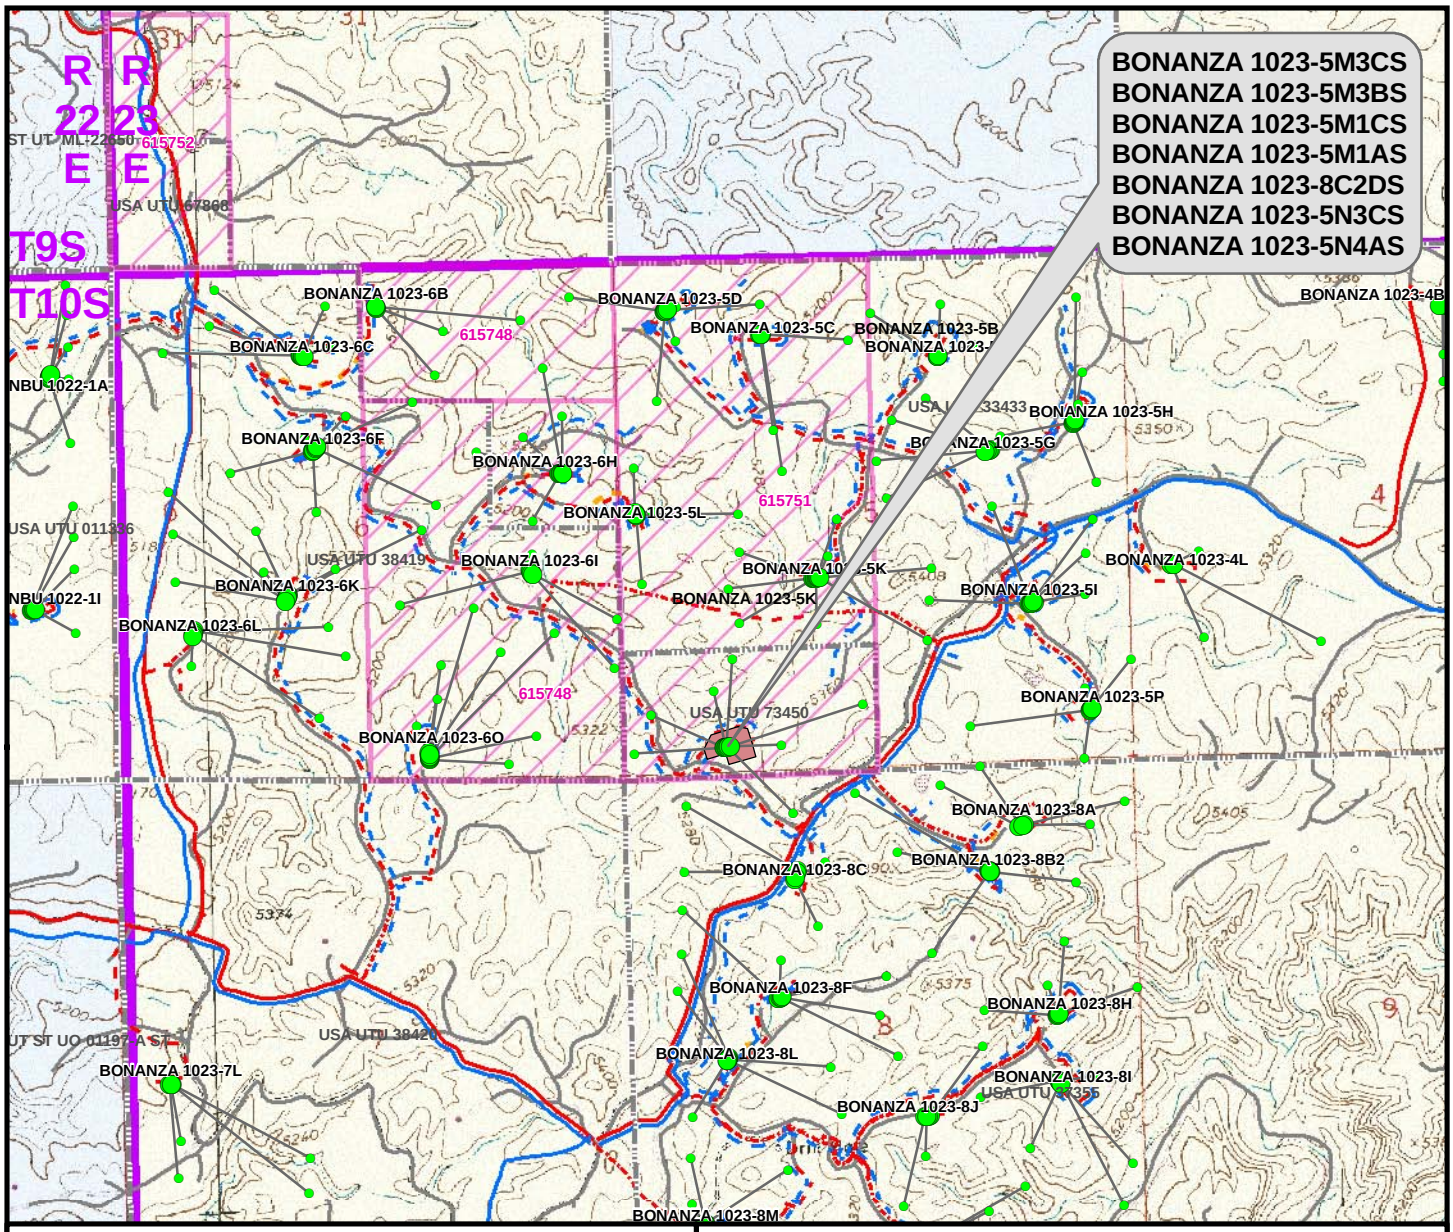

Proposed Well	Distance To Nearest CA Boundary
BONANZA 1023-5M3CS	55ft
BONANZA 1023-5M3BS	240ft
BONANZA 1023-5M1CS	800ft
BONANZA 1023-5M1AS	1,100ft
BONANZA 1023-8C2DS	487ft
BONANZA 1023-5N3CS	221ft
BONANZA 1023-5N4AS	140ft

Proposed Well	Distance To Nearest Lease Boundary
BONANZA 1023-5M3CS	55ft
BONANZA 1023-5M3BS	240ft
BONANZA 1023-5M1CS	424ft
BONANZA 1023-5M1AS	94ft
BONANZA 1023-8C2DS	487ft
BONANZA 1023-5N3CS	221ft
BONANZA 1023-5N4AS	140ft

Legend

- Well - Proposed
- Bottom Hole - Proposed
- Well Path
- Well Pad
- CA Agreement
- Lease Boundary
- Gas Pipeline - Proposed
- Gas Pipeline - To Be Upgraded
- Gas Pipeline - Existing
- Liquid Pipeline - Proposed
- Liquid Pipeline - To Be Upgraded
- Liquid Pipeline - Existing
- Road - Proposed
- Road - Existing
- Bureau of Land Management
- Indian Reservation
- State
- Private

Kerr-McGee Oil & Gas Onshore, LP
1099 18th Street, Denver, Colorado 80202

WELL PAD - BONANZA 1023-5M

TOPO E
BONANZA 1023-5M3CS, BONANZA 1023-5M3BS,
BONANZA 1023-5M1CS, BONANZA 1023-5M1AS,
BONANZA 1023-8C2DS, BONANZA 1023-5N3CS &
BONANZA 1023-5N4AS
LOCATED IN SECTION 5, T10S, R23E
S.L.B.&M., UINTAH COUNTY, UTAH

609 CONSULTING, LLC
371 Coffeen Avenue
Sheridan, WY 82801
Phone (307) 674-0609
Fax (307) 674-0182

N

Scale: 1" = 2,000ft	NAD83 USP Central	Sheet No: 18	18 of 19
Drawn: CPS	Date: 25 Mar 2010		
Revised: CPS	Date: 15 Oct 2010		

Kerr-McGee Oil & Gas Onshore, LP
WELL PAD – BONANZA 1023-5M
WELLS – BONANZA 1023-5M3CS, BONANZA 1023-5M3BS, BONANZA 1023-5M1CS, BONANZA 1023-5M1AS, BONANZA 1023-8C2DS, BONANZA 1023-5N3CS & BONANZA 1023-5N4AS
Section 5, T10S, R23E, S.L.B.&M.

From the intersection of U.S. Highway 40 and 500 East Street in Vernal, Utah proceed in an easterly then southerly direction along U.S. Highway 40 approximately 3.3 miles to the junction of State Highway 45; exit right and proceed in a southerly direction along State Highway 45 approximately 20.2 miles to the junction of the Glen Bench Road (County B Road 3260). Exit right and proceed in a southwesterly direction along the Glen Bench Road approximately 14.4 miles to the intersection of the Chipeta Wells Road (County B Road 3410) which road intersection is approximately 400 feet northeast of the Mountain Fuel Bridge, at the White River. Exit left and proceed in a southeasterly direction along the Chipeta Wells Road approximately 6.7 miles to a Class D County Road to the right. Exit right and proceed in a southeasterly then southerly direction along the Class D Road approximately 1.3 miles to a second Class D County Road to the right. Exit right and proceed in a southwesterly direction along second Class D Road approximately 1.6 miles to a third Class D County Road to the left. Exit left and proceed in a southeasterly direction along third Class D Road approximately 120 feet to the junction of County B Road 3420. Exit right and proceed in a southwesterly direction along County B Road 3420 approximately 0.8 miles to a Class D County Road to the right. Exit right and proceed in a northwesterly direction along Class D Road approximately 0.2 miles to a service road to the right. Exit right and proceed in a northeasterly direction along service road approximately 140 feet to the proposed well pad.

Total distance from Vernal, Utah to the proposed well location is approximately 48.5 miles in a southerly direction.

RECEIVED: October 17, 2011

ANADARKO PETROLEUM CORP.

UINTAH COUNTY, UTAH (nad 27)
Bonanza 1023-5M PAD
BONANZA 1023-5M3BS

BONANZA 1023-5M3BS

Plan: PLAN #1 4-27-10 RHS

Standard Planning Report

27 April, 2010

RECEIVED: October 17, 2011

API Well Number: 43047520770000

Anadarko Petroleum Corporation

Project: UINTAH COUNTY, UTAH (nad 27)
Site: Bonanza 1023-5M PAD
Well: BONANZA 1023-5M3BS
Wellbore: BONANZA 1023-5M3BS
Section: SECTION 5 T10S R23E
SHL: 205 FSL 1001 FWL
Design: PLAN #1 4-27-10 RHS
Latitude: 39° 58' 16.666 N
Longitude: 109° 21' 21.118 W
GL: 5295.00
KB: WELL @ 5309.00ft (Original Well Elev)

Weatherford

T M

Azimuths to True North
Magnetic North: 11.18°

Magnetic Field
Strength: 52459.4snT
Dip Angle: 65.92°
Date: 4/27/2010
Model: BGGM2009

LEGEND

- Bonanza 1023-5M EXISTING, Bonanza 1023-5M EXISTING, Bonanza 1023-5M EXISTING V0
- BONANZA 1023-5M1AS, BONANZA 1023-5M1AS, PLAN #1 4-27-10 RHS V0
- BONANZA 1023-5M1CS, BONANZA 1023-5M1CS, PLAN #1 4-27-10 RHS V0
- BONANZA 1023-5M3CS, BONANZA 1023-5M3CS, PLAN #1 4-27-10 RHS V0
- BONANZA 1023-5N3CS, BONANZA 1023-5N3CS, PLAN #1 4-27-10 RHS V0
- BONANZA 1023-5N4AS, BONANZA 1023-5N4AS, PLAN #1 4-27-10 RHS V0
- BONANZA 1023-8C2DS, BONANZA 1023-8C2DS, PLAN #1 4-27-10 RHS V0
- PLAN #1 4-27-10 RHS

FORMATION TOP DETAILS

TVDPath	MDPath	Formation
1231.00	1232.14	GREEN RIVER
4209.00	4320.18	WASATCH
7287.00	7405.23	MESAVERDE

CASING DETAILS

TVD	MD	Name	Size
1990.00	1992.18	8 5/8"	8.62

SECTION DETAILS

MD	Inc	Azi	TVD	+N/-S	+E/-W	DLeg	TFace	VSec	Annotation
0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
300.00	0.00	0.00	300.00	0.00	0.00	0.00	0.00	0.00	Start Build 2.00
450.00	3.00	295.27	449.93	1.68	-3.55	2.00	295.27	3.93	Start 1642.32 hold at 450.00 MD
2092.32	3.00	295.27	2090.00	38.37	-81.28	0.00	0.00	89.88	Start DLS 3.00 TFO 0.01
2659.04	20.00	295.27	2643.31	86.43	-183.08	3.00	0.01	202.46	Start 1364.61 hold at 2659.04 MD
4023.65	20.00	295.27	3925.61	285.72	-605.16	0.00	0.00	669.22	Start Drop -2.00
5023.73	0.00	0.00	4905.50	359.50	-761.41	2.00	180.00	842.01	Start 3551.50 hold at 5023.73 MD
8575.23	0.00	0.00	8457.00	359.50	-761.41	0.00	0.00	842.01	TD at 8575.23

WELLBORE TARGET DETAILS (MAP CO-ORDINATES AND LAT/LONG)

Name	TVD	+N/-S	+E/-W	Latitude	Longitude	Shape
PBHL	8457.00	359.50	-761.41	39° 58' 20.219 N	109° 21' 30.899 W	Circle (Radius: 25.00)

WELL DETAILS: BONANZA 1023-5M3BS

Ground Level: 5295.00

+N/-S	+E/-W	Northing	Easting	Latitude	Longitude	Slot
0.00	0.00	14519838.85	2101073.96	39° 58' 16.666 N	109° 21' 21.118 W	

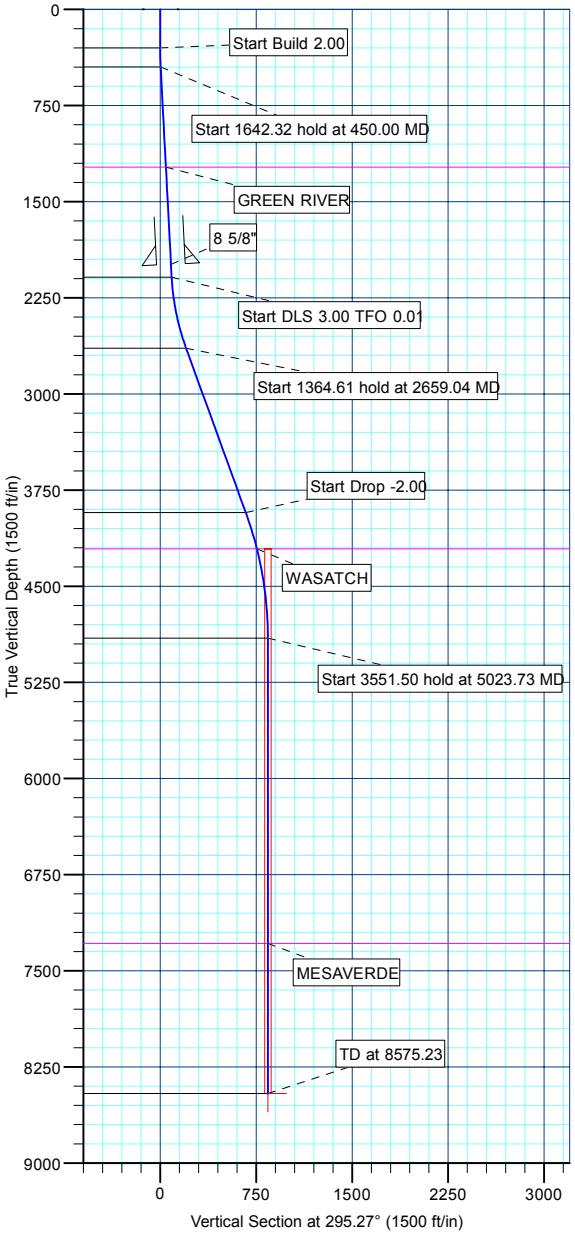

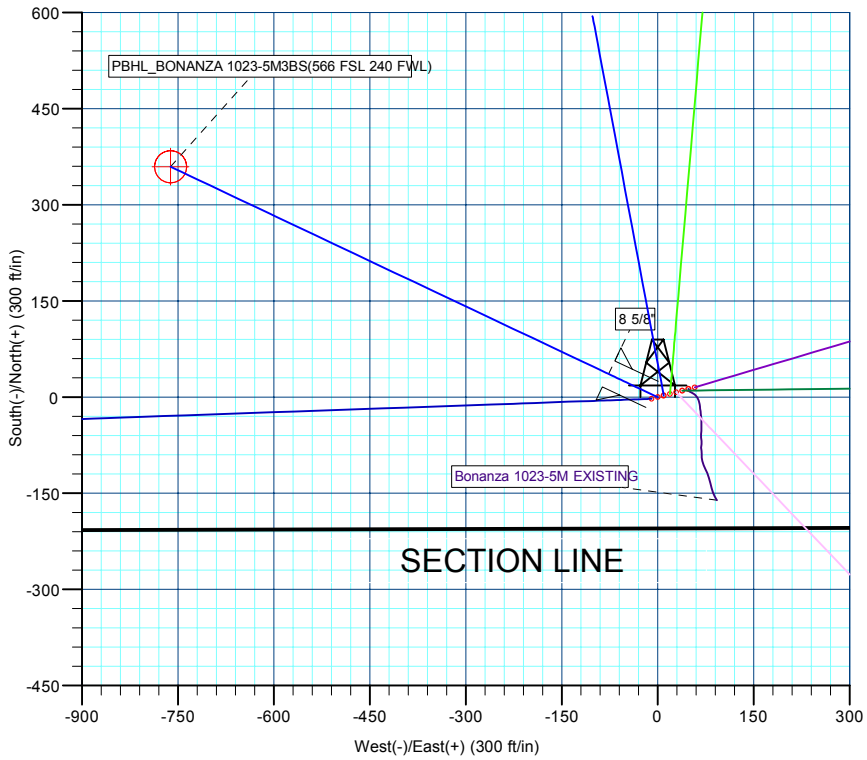

Plan: PLAN #1 4-27-10 RHS (BONANZA 1023-5M3BS/BONANZA 1023-5M3BS)

Created By: Robert H. Scott Date: 14:42, April 27 2010

Weatherford International Ltd.

Planning Report

Database:	EDM 2003.21 Single User Db	**Local Co-ordinate Reference:**	Well BONANZA 1023-5M3BS
Company:	ANADARKO PETROLEUM CORP.	**TVD Reference:**	WELL @ 5309.00ft (Original Well Elev)
Project:	UINTAH COUNTY, UTAH (nad 27)	**MD Reference:**	WELL @ 5309.00ft (Original Well Elev)
Site:	Bonanza 1023-5M PAD	**North Reference:**	True
Well:	BONANZA 1023-5M3BS	**Survey Calculation Method:**	Minimum Curvature
Wellbore:	BONANZA 1023-5M3BS		
Design:	PLAN #1 4-27-10 RHS		

Project UINTAH COUNTY, UTAH (nad 27),

Map System:	Universal Transverse Mercator (US Survey Fee	**System Datum:**	Mean Sea Level
Geo Datum:	NAD 1927 (NADCON CONUS)		
Map Zone:	Zone 12N (114 W to 108 W)		

Site Bonanza 1023-5M PAD, SECTION 5 T10S R23E

Site Position:		**Northing:**	14,519,855.21 ft	**Latitude:**	39° 58' 16.817 N
From:	Lat/Long	**Easting:**	2,101,131.68 ft	**Longitude:**	109° 21' 20.372 W
Position Uncertainty:	0.00 ft	**Slot Radius:**	in	**Grid Convergence:**	1.06 °

Well BONANZA 1023-5M3BS

Well Position	**+N/-S**	-15.30 ft	**Northing:**	14,519,838.85 ft	**Latitude:**	39° 58' 16.666 N
	+E/-W	-58.01 ft	**Easting:**	2,101,073.96 ft	**Longitude:**	109° 21' 21.118 W
Position Uncertainty		0.00 ft	**Wellhead Elevation:**	ft	**Ground Level:**	5,295.00 ft

Wellbore BONANZA 1023-5M3BS

Magnetics	Model Name	Sample Date	Declination (°)	Dip Angle (°)	Field Strength (nT)
	BGGM2009	4/27/2010	11.18	65.92	52,459

Design PLAN #1 4-27-10 RHS

Audit Notes:

Version:		**Phase:**	PLAN	**Tie On Depth:**	0.00

Vertical Section:	Depth From (TVD) (ft)	+N/-S (ft)	+E/-W (ft)	Direction (°)
	0.00	0.00	0.00	295.27

Plan Sections

Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N/-S (ft)	+E/-W (ft)	Dogleg Rate (°/100ft)	Build Rate (°/100ft)	Turn Rate (°/100ft)	TFO (°)	Target
0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
300.00	0.00	0.00	300.00	0.00	0.00	0.00	0.00	0.00	0.00	
450.00	3.00	295.27	449.93	1.68	-3.55	2.00	2.00	0.00	295.27	
2,092.32	3.00	295.27	2,090.00	38.37	-81.28	0.00	0.00	0.00	0.00	
2,659.04	20.00	295.27	2,643.31	86.43	-183.08	3.00	3.00	0.00	0.01	
4,023.65	20.00	295.27	3,925.61	285.72	-605.16	0.00	0.00	0.00	0.00	
5,023.73	0.00	0.00	4,905.50	359.50	-761.41	2.00	-2.00	0.00	180.00	
8,575.23	0.00	0.00	8,457.00	359.50	-761.41	0.00	0.00	0.00	0.00	PBHL_BONANZA 1

Anadarko Petroleum Corporation

Weatherford International Ltd.

Planning Report

Weatherford

Database:	EDM 2003.21 Single User Db	**Local Co-ordinate Reference:**	Well BONANZA 1023-5M3BS
Company:	ANADARKO PETROLEUM CORP.	**TVD Reference:**	WELL @ 5309.00ft (Original Well Elev)
Project:	UINTAH COUNTY, UTAH (nad 27)	**MD Reference:**	WELL @ 5309.00ft (Original Well Elev)
Site:	Bonanza 1023-5M PAD	**North Reference:**	True
Well:	BONANZA 1023-5M3BS	**Survey Calculation Method:**	Minimum Curvature
Wellbore:	BONANZA 1023-5M3BS		
Design:	PLAN #1 4-27-10 RHS		

Planned Survey

Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N/-S (ft)	+E/-W (ft)	Vertical Section (ft)	Dogleg Rate (°/100ft)	Build Rate (°/100ft)	Turn Rate (°/100ft)
Start Build 2.00									
300.00	0.00	0.00	300.00	0.00	0.00	0.00	0.00	0.00	0.00
400.00	2.00	295.27	399.98	0.74	-1.58	1.75	2.00	2.00	0.00
Start 1642.32 hold at 450.00 MD									
450.00	3.00	295.27	449.93	1.68	-3.55	3.93	2.00	2.00	0.00
500.00	3.00	295.27	499.86	2.79	-5.92	6.54	0.00	0.00	0.00
600.00	3.00	295.27	599.73	5.03	-10.65	11.78	0.00	0.00	0.00
700.00	3.00	295.27	699.59	7.26	-15.38	17.01	0.00	0.00	0.00
800.00	3.00	295.27	799.45	9.50	-20.12	22.24	0.00	0.00	0.00
900.00	3.00	295.27	899.31	11.73	-24.85	27.48	0.00	0.00	0.00
1,000.00	3.00	295.27	999.18	13.96	-29.58	32.71	0.00	0.00	0.00
1,100.00	3.00	295.27	1,099.04	16.20	-34.31	37.94	0.00	0.00	0.00
1,200.00	3.00	295.27	1,198.90	18.43	-39.05	43.18	0.00	0.00	0.00
GREEN RIVER									
1,232.14	3.00	295.27	1,231.00	19.15	-40.57	44.86	0.00	0.00	0.00
1,300.00	3.00	295.27	1,298.77	20.67	-43.78	48.41	0.00	0.00	0.00
1,400.00	3.00	295.27	1,398.63	22.90	-48.51	53.65	0.00	0.00	0.00
1,500.00	3.00	295.27	1,498.49	25.13	-53.24	58.88	0.00	0.00	0.00
1,600.00	3.00	295.27	1,598.36	27.37	-57.98	64.11	0.00	0.00	0.00
1,700.00	3.00	295.27	1,698.22	29.60	-62.71	69.35	0.00	0.00	0.00
1,800.00	3.00	295.27	1,798.08	31.84	-67.44	74.58	0.00	0.00	0.00
1,900.00	3.00	295.27	1,897.94	34.07	-72.18	79.81	0.00	0.00	0.00
8 5/8"									
1,992.18	3.00	295.27	1,990.00	36.13	-76.54	84.64	0.00	0.00	0.00
2,000.00	3.00	295.27	1,997.81	36.31	-76.91	85.05	0.00	0.00	0.00
Start DLS 3.00 TFO 0.01									
2,092.32	3.00	295.27	2,090.00	38.37	-81.28	89.88	0.00	0.00	0.00
2,100.00	3.23	295.27	2,097.67	38.55	-81.66	90.30	3.00	3.00	0.01
2,200.00	6.23	295.27	2,197.32	42.07	-89.11	98.54	3.00	3.00	0.00
2,300.00	9.23	295.27	2,296.40	47.81	-101.27	111.99	3.00	3.00	0.00
2,400.00	12.23	295.27	2,394.64	55.76	-118.11	130.61	3.00	3.00	0.00
2,500.00	15.23	295.27	2,491.77	65.89	-139.57	154.34	3.00	3.00	0.00
2,600.00	18.23	295.27	2,587.52	78.18	-165.60	183.12	3.00	3.00	0.00
Start 1364.61 hold at 2659.04 MD									
2,659.04	20.00	295.27	2,643.31	86.43	-183.08	202.46	3.00	3.00	0.00
2,700.00	20.00	295.27	2,681.80	92.42	-195.75	216.47	0.00	0.00	0.00
2,800.00	20.00	295.27	2,775.76	107.02	-226.68	250.67	0.00	0.00	0.00
2,900.00	20.00	295.27	2,869.73	121.62	-257.61	284.88	0.00	0.00	0.00
3,000.00	20.00	295.27	2,963.70	136.23	-288.54	319.08	0.00	0.00	0.00
3,100.00	20.00	295.27	3,057.67	150.83	-319.47	353.29	0.00	0.00	0.00
3,200.00	20.00	295.27	3,151.64	165.44	-350.40	387.49	0.00	0.00	0.00
3,300.00	20.00	295.27	3,245.61	180.04	-381.33	421.70	0.00	0.00	0.00
3,400.00	20.00	295.27	3,339.57	194.64	-412.26	455.90	0.00	0.00	0.00
3,500.00	20.00	295.27	3,433.54	209.25	-443.19	490.11	0.00	0.00	0.00
3,600.00	20.00	295.27	3,527.51	223.85	-474.12	524.31	0.00	0.00	0.00
3,700.00	20.00	295.27	3,621.48	238.46	-505.05	558.51	0.00	0.00	0.00
3,800.00	20.00	295.27	3,715.45	253.06	-535.98	592.72	0.00	0.00	0.00
3,900.00	20.00	295.27	3,809.42	267.66	-566.91	626.92	0.00	0.00	0.00
4,000.00	20.00	295.27	3,903.38	282.27	-597.84	661.13	0.00	0.00	0.00
Start Drop -2.00									
4,023.65	20.00	295.27	3,925.61	285.72	-605.16	669.22	0.00	0.00	0.00
4,100.00	18.47	295.27	3,997.69	296.46	-627.91	694.37	2.00	-2.00	0.00
4,200.00	16.47	295.27	4,093.07	309.28	-655.06	724.40	2.00	-2.00	0.00

Anadarko Petroleum Corporation

Weatherford International Ltd.

Planning Report

Weatherford

Database:	EDM 2003.21 Single User Db	**Local Co-ordinate Reference:**	Well BONANZA 1023-5M3BS
Company:	ANADARKO PETROLEUM CORP.	**TVD Reference:**	WELL @ 5309.00ft (Original Well Elev)
Project:	UINTAH COUNTY, UTAH (nad 27)	**MD Reference:**	WELL @ 5309.00ft (Original Well Elev)
Site:	Bonanza 1023-5M PAD	**North Reference:**	True
Well:	BONANZA 1023-5M3BS	**Survey Calculation Method:**	Minimum Curvature
Wellbore:	BONANZA 1023-5M3BS		
Design:	PLAN #1 4-27-10 RHS		

Planned Survey

Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N/-S (ft)	+E/-W (ft)	Vertical Section (ft)	Dogleg Rate (°/100ft)	Build Rate (°/100ft)	Turn Rate (°/100ft)
4,300.00	14.47	295.27	4,189.44	320.67	-679.18	751.08	2.00	-2.00	0.00
WASATCH									
4,320.18	14.07	295.27	4,209.00	322.80	-683.68	756.06	2.00	-2.00	0.00
4,400.00	12.47	295.27	4,286.68	330.62	-700.25	774.38	2.00	-2.00	0.00
4,500.00	10.47	295.27	4,384.68	339.12	-718.24	794.27	2.00	-2.00	0.00
4,600.00	8.47	295.27	4,483.31	346.14	-733.13	810.73	2.00	-2.00	0.00
4,700.00	6.47	295.27	4,582.46	351.70	-744.89	823.74	2.00	-2.00	0.00
4,800.00	4.47	295.27	4,682.00	355.77	-753.52	833.28	2.00	-2.00	0.00
4,900.00	2.47	295.27	4,781.81	358.36	-759.00	839.34	2.00	-2.00	0.00
5,000.00	0.47	295.27	4,881.77	359.46	-761.32	841.92	2.00	-2.00	0.00
Start 3551.50 hold at 5023.73 MD									
5,023.73	0.00	0.00	4,905.50	359.50	-761.41	842.01	2.00	-2.00	0.00
5,100.00	0.00	0.00	4,981.77	359.50	-761.41	842.01	0.00	0.00	0.00
5,200.00	0.00	0.00	5,081.77	359.50	-761.41	842.01	0.00	0.00	0.00
5,300.00	0.00	0.00	5,181.77	359.50	-761.41	842.01	0.00	0.00	0.00
5,400.00	0.00	0.00	5,281.77	359.50	-761.41	842.01	0.00	0.00	0.00
5,500.00	0.00	0.00	5,381.77	359.50	-761.41	842.01	0.00	0.00	0.00
5,600.00	0.00	0.00	5,481.77	359.50	-761.41	842.01	0.00	0.00	0.00
5,700.00	0.00	0.00	5,581.77	359.50	-761.41	842.01	0.00	0.00	0.00
5,800.00	0.00	0.00	5,681.77	359.50	-761.41	842.01	0.00	0.00	0.00
5,900.00	0.00	0.00	5,781.77	359.50	-761.41	842.01	0.00	0.00	0.00
6,000.00	0.00	0.00	5,881.77	359.50	-761.41	842.01	0.00	0.00	0.00
6,100.00	0.00	0.00	5,981.77	359.50	-761.41	842.01	0.00	0.00	0.00
6,200.00	0.00	0.00	6,081.77	359.50	-761.41	842.01	0.00	0.00	0.00
6,300.00	0.00	0.00	6,181.77	359.50	-761.41	842.01	0.00	0.00	0.00
6,400.00	0.00	0.00	6,281.77	359.50	-761.41	842.01	0.00	0.00	0.00
6,500.00	0.00	0.00	6,381.77	359.50	-761.41	842.01	0.00	0.00	0.00
6,600.00	0.00	0.00	6,481.77	359.50	-761.41	842.01	0.00	0.00	0.00
6,700.00	0.00	0.00	6,581.77	359.50	-761.41	842.01	0.00	0.00	0.00
6,800.00	0.00	0.00	6,681.77	359.50	-761.41	842.01	0.00	0.00	0.00
6,900.00	0.00	0.00	6,781.77	359.50	-761.41	842.01	0.00	0.00	0.00
7,000.00	0.00	0.00	6,881.77	359.50	-761.41	842.01	0.00	0.00	0.00
7,100.00	0.00	0.00	6,981.77	359.50	-761.41	842.01	0.00	0.00	0.00
7,200.00	0.00	0.00	7,081.77	359.50	-761.41	842.01	0.00	0.00	0.00
7,300.00	0.00	0.00	7,181.77	359.50	-761.41	842.01	0.00	0.00	0.00
7,400.00	0.00	0.00	7,281.77	359.50	-761.41	842.01	0.00	0.00	0.00
MESAVERDE									
7,405.23	0.00	0.00	7,287.00	359.50	-761.41	842.01	0.00	0.00	0.00
7,500.00	0.00	0.00	7,381.77	359.50	-761.41	842.01	0.00	0.00	0.00
7,600.00	0.00	0.00	7,481.77	359.50	-761.41	842.01	0.00	0.00	0.00
7,700.00	0.00	0.00	7,581.77	359.50	-761.41	842.01	0.00	0.00	0.00
7,800.00	0.00	0.00	7,681.77	359.50	-761.41	842.01	0.00	0.00	0.00
7,900.00	0.00	0.00	7,781.77	359.50	-761.41	842.01	0.00	0.00	0.00
8,000.00	0.00	0.00	7,881.77	359.50	-761.41	842.01	0.00	0.00	0.00
8,100.00	0.00	0.00	7,981.77	359.50	-761.41	842.01	0.00	0.00	0.00
8,200.00	0.00	0.00	8,081.77	359.50	-761.41	842.01	0.00	0.00	0.00
8,300.00	0.00	0.00	8,181.77	359.50	-761.41	842.01	0.00	0.00	0.00
8,400.00	0.00	0.00	8,281.77	359.50	-761.41	842.01	0.00	0.00	0.00
8,500.00	0.00	0.00	8,381.77	359.50	-761.41	842.01	0.00	0.00	0.00
TD at 8575.23 - PBHL_BONANZA 1023-5M3BS(566 FSL 240 FWL)									
8,575.23	0.00	0.00	8,457.00	359.50	-761.41	842.01	0.00	0.00	0.00

Database:	EDM 2003.21 Single User Db	**Local Co-ordinate Reference:**	Well BONANZA 1023-5M3BS
Company:	ANADARKO PETROLEUM CORP.	**TVD Reference:**	WELL @ 5309.00ft (Original Well Elev)
Project:	UINTAH COUNTY, UTAH (nad 27)	**MD Reference:**	WELL @ 5309.00ft (Original Well Elev)
Site:	Bonanza 1023-5M PAD	**North Reference:**	True
Well:	BONANZA 1023-5M3BS	**Survey Calculation Method:**	Minimum Curvature
Wellbore:	BONANZA 1023-5M3BS		
Design:	PLAN #1 4-27-10 RHS		

Design Targets

Target Name - hit/miss target - Shape	Dip Angle (°)	Dip Dir. (°)	TVD (ft)	+N/-S (ft)	+E/-W (ft)	Northing (ft)	Easting (ft)	Latitude	Longitude
PBHL_BONANZA 10 - plan hits target center - Circle (radius 25.00)	0.00	0.00	8,457.00	359.50	-761.41	14,520,184.24	2,100,306.05	39° 58' 20.219 N	109° 21' 30.899 W

Casing Points

Measured Depth (ft)	Vertical Depth (ft)	Name	Casing Diameter (in)	Hole Diameter (in)
1,992.18	1,990.00	8 5/8"	8.62	11.00

Formations

Measured Depth (ft)	Vertical Depth (ft)	Name	Lithology	Dip (°)	Dip Direction (°)
1,232.14	1,231.00	GREEN RIVER			
4,320.18	4,209.00	WASATCH			
7,405.23	7,287.00	MESAVERDE			

Plan Annotations

Measured Depth (ft)	Vertical Depth (ft)	Local Coordinates +N/-S (ft)	Local Coordinates +E/-W (ft)	Comment
300.00	300.00	0.00	0.00	Start Build 2.00
450.00	449.93	1.68	-3.55	Start 1642.32 hold at 450.00 MD
2,092.32	2,090.00	38.37	-81.28	Start DLS 3.00 TFO 0.01
2,659.04	2,643.31	86.43	-183.08	Start 1364.61 hold at 2659.04 MD
4,023.65	3,925.61	285.72	-605.16	Start Drop -2.00
5,023.73	4,905.50	359.50	-761.41	Start 3551.50 hold at 5023.73 MD
8,575.23	8,457.00	359.50	-761.41	TD at 8575.23

ANADARKO PETROLEUM CORP.

UINTAH COUNTY, UTAH (nad 27)
Bonanza 1023-5M PAD
BONANZA 1023-5M3BS

BONANZA 1023-5M3BS
PLAN #1 4-27-10 RHS

Anticollision Report

27 April, 2010

RECEIVED: October 17, 2011

Anadarko Petroleum Corporation

Weatherford International Ltd.

Anticollision Report

Weatherford

Company:	ANADARKO PETROLEUM CORP.	**Local Co-ordinate Reference:**	Well BONANZA 1023-5M3BS
Project:	UINTAH COUNTY, UTAH (nad 27)	**TVD Reference:**	WELL @ 5309.00ft (Original Well Elev)
Reference Site:	Bonanza 1023-5M PAD	**MD Reference:**	WELL @ 5309.00ft (Original Well Elev)
Site Error:	0.00ft	**North Reference:**	True
Reference Well:	BONANZA 1023-5M3BS	**Survey Calculation Method:**	Minimum Curvature
Well Error:	0.00ft	**Output errors are at**	2.00 sigma
Reference Wellbore	BONANZA 1023-5M3BS	**Database:**	EDM 2003.21 Single User Db
Reference Design:	PLAN #1 4-27-10 RHS	**Offset TVD Reference:**	Offset Datum

Reference PLAN #1 4-27-10 RHS

Filter type:	NO GLOBAL FILTER: Using user defined selection & filtering criteria		
Interpolation Method:	Stations	**Error Model:**	ISCWSA
Depth Range:	0.00 to 20,000.00ft	**Scan Method:**	Closest Approach 3D
Results Limited by:	Maximum center-center distance of 10,000.00ft	**Error Surface:**	Elliptical Conic
Warning Levels Evaluated at:	2.00 **Sigma**		

Survey Tool Program **Date** 4/27/2010

From (ft)	To (ft)	Survey (Wellbore)	Tool Name	Description
0.00	8,575.23	PLAN #1 4-27-10 RHS (BONANZA 1023-5	MWD	MWD - Standard

Summary

Site Name / Offset Well - Wellbore - Design	Reference Measured Depth (ft)	Offset Measured Depth (ft)	Distance Between Centres (ft)	Distance Between Ellipses (ft)	Separation Factor	Warning
Bonanza 1023-5M PAD						
Bonanza 1023-5M EXISTING - Bonanza 1023-5M EXIST	300.00	286.00	49.86	48.69	42.519	CC, ES
Bonanza 1023-5M EXISTING - Bonanza 1023-5M EXIST	2,100.00	2,080.70	146.39	137.70	16.853	SF
BONANZA 1023-5M1AS - BONANZA 1023-5M1AS - PLA	300.00	300.00	20.00	18.91	18.307	CC, ES
BONANZA 1023-5M1AS - BONANZA 1023-5M1AS - PLA	2,092.32	2,088.90	121.94	112.48	12.892	SF
BONANZA 1023-5M1CS - BONANZA 1023-5M1CS - PL	300.00	300.00	9.86	8.77	9.030	CC, ES
BONANZA 1023-5M1CS - BONANZA 1023-5M1CS - PL	400.00	399.90	11.49	9.95	7.469	SF
BONANZA 1023-5M3CS - BONANZA 1023-5M3CS - PL	300.00	300.00	9.86	8.77	9.030	CC
BONANZA 1023-5M3CS - BONANZA 1023-5M3CS - PL	400.00	399.66	10.25	8.73	6.732	ES
BONANZA 1023-5M3CS - BONANZA 1023-5M3CS - PL	2,000.00	1,999.00	45.41	36.28	4.973	SF
BONANZA 1023-5N3CS - BONANZA 1023-5N3CS - PLA	300.00	300.00	40.00	38.90	36.614	CC, ES
BONANZA 1023-5N3CS - BONANZA 1023-5N3CS - PLA	450.00	446.39	48.74	46.98	27.707	SF
BONANZA 1023-5N4AS - BONANZA 1023-5N4AS - PLA	300.00	300.00	59.99	58.90	54.921	CC, ES
BONANZA 1023-5N4AS - BONANZA 1023-5N4AS - PLA	600.00	587.13	91.83	89.39	37.583	SF
BONANZA 1023-8C2DS - BONANZA 1023-8C2DS - PLA	300.00	300.00	29.86	28.77	27.336	CC, ES
BONANZA 1023-8C2DS - BONANZA 1023-8C2DS - PLA	500.00	498.58	39.28	37.33	20.187	SF

Offset Design Bonanza 1023-5M PAD - Bonanza 1023-5M EXISTING - Bonanza 1023-5M EXISTING - Bonanza 1023 **Offset Site Error:** 0.00 ft

Survey Program: 100-NS-GYRO-MS **Offset Well Error:** 0.00 ft

Reference Measured Depth (ft)	Reference Vertical Depth (ft)	Offset Measured Depth (ft)	Offset Vertical Depth (ft)	Semi Major Axis Reference (ft)	Semi Major Axis Offset (ft)	Highside Toolface (°)	Offset Wellbore Centre +N/-S (ft)	Offset Wellbore Centre +E/-W (ft)	Distance Between Centres (ft)	Distance Between Ellipses (ft)	Minimum Separation (ft)	Separation Factor	Warning
0.00	0.00	0.00	0.00	0.00	0.00	75.19	12.75	48.20	51.79				
100.00	100.00	86.00	86.00	0.10	0.11	75.19	12.75	48.20	49.86	49.65	0.21	236.502	
200.00	200.00	186.00	186.00	0.32	0.36	75.19	12.75	48.20	49.86	49.18	0.68	73.062	
300.00	300.00	286.00	286.00	0.55	0.63	75.19	12.75	48.20	49.86	48.69	1.17	42.519	CC, ES
400.00	399.98	385.98	385.98	0.77	0.89	141.16	12.75	48.20	51.21	49.55	1.66	30.901	
450.00	449.93	435.88	435.88	0.88	0.98	142.64	12.73	48.22	52.94	51.08	1.86	28.520	
500.00	499.86	485.73	485.73	0.99	1.06	144.40	12.64	48.32	55.13	53.09	2.04	27.025	
600.00	599.73	585.70	585.70	1.22	1.22	147.53	12.47	48.53	59.65	57.22	2.42	24.636	
700.00	699.59	685.52	685.52	1.46	1.37	150.18	12.32	48.59	64.18	61.38	2.79	22.965	
800.00	799.45	785.41	785.40	1.69	1.45	152.69	11.91	48.72	68.88	65.78	3.10	22.238	
900.00	899.31	885.20	885.20	1.93	1.55	154.88	11.49	48.83	73.68	70.25	3.43	21.512	
1,000.00	999.18	985.03	985.02	2.17	1.69	156.79	11.09	49.00	78.64	74.84	3.79	20.726	
1,100.00	1,099.04	1,085.04	1,085.04	2.42	1.85	158.49	10.68	49.10	83.60	79.42	4.18	19.994	

CC - Min centre to center distance or covergent point, SF - min separation factor, ES - min ellipse separation

Anadarko Petroleum Corporation

Weatherford International Ltd.

Anticollision Report

Weatherford

Company:	ANADARKO PETROLEUM CORP.	**Local Co-ordinate Reference:**	Well BONANZA 1023-5M3BS
Project:	UINTAH COUNTY, UTAH (nad 27)	**TVD Reference:**	WELL @ 5309.00ft (Original Well Elev)
Reference Site:	Bonanza 1023-5M PAD	**MD Reference:**	WELL @ 5309.00ft (Original Well Elev)
Site Error:	0.00ft	**North Reference:**	True
Reference Well:	BONANZA 1023-5M3BS	**Survey Calculation Method:**	Minimum Curvature
Well Error:	0.00ft	**Output errors are at**	2.00 sigma
Reference Wellbore	BONANZA 1023-5M3BS	**Database:**	EDM 2003.21 Single User Db
Reference Design:	PLAN #1 4-27-10 RHS	**Offset TVD Reference:**	Offset Datum

Offset Design Bonanza 1023-5M PAD - Bonanza 1023-5M EXISTING - Bonanza 1023-5M EXISTING - Bonanza 1023

Offset Site Error: 0.00 ft

Survey Program: 100-NS-GYRO-MS

Offset Well Error: 0.00 ft

Reference Measured Depth (ft)	Reference Vertical Depth (ft)	Offset Measured Depth (ft)	Offset Vertical Depth (ft)	Semi Major Axis Reference (ft)	Semi Major Axis Offset (ft)	Highside Toolface (°)	Offset Wellbore Centre +N/-S (ft)	Offset Wellbore Centre +E/-W (ft)	Distance Between Centres (ft)	Distance Between Ellipses (ft)	Minimum Separation (ft)	Separation Factor	Warning
1,200.00	1,198.90	1,184.75	1,184.74	2.66	2.03	159.99	10.26	49.13	88.56	83.97	4.59	19.309	
1,300.00	1,298.77	1,284.56	1,284.55	2.90	2.24	161.32	9.87	49.32	93.72	88.70	5.02	18.680	
1,400.00	1,398.63	1,384.48	1,384.47	3.14	2.45	162.51	9.46	49.47	98.90	93.44	5.46	18.120	
1,500.00	1,498.49	1,484.38	1,484.37	3.39	2.67	163.61	9.04	49.54	104.04	98.14	5.90	17.627	
1,600.00	1,598.36	1,583.24	1,583.23	3.63	2.90	164.61	8.52	49.95	109.57	103.22	6.35	17.248	
1,700.00	1,698.22	1,681.57	1,681.55	3.87	3.13	165.55	7.70	51.45	116.27	109.47	6.81	17.078	
1,800.00	1,798.08	1,781.00	1,780.94	4.12	3.36	166.45	6.60	53.78	123.87	116.60	7.27	17.037	
1,900.00	1,897.94	1,880.79	1,880.70	4.36	3.60	167.31	5.36	56.08	131.47	123.73	7.74	16.989	
2,000.00	1,997.81	1,980.67	1,980.55	4.60	3.85	168.21	3.84	58.20	138.99	130.78	8.21	16.927	
2,092.32	2,090.00	2,073.01	2,072.85	4.83	4.08	169.08	2.17	59.93	145.81	137.16	8.65	16.856	
2,100.00	2,097.67	2,080.70	2,080.53	4.85	4.10	169.15	2.02	60.06	146.39	137.70	8.69	16.853 SF	
2,200.00	2,197.32	2,180.33	2,180.13	5.11	4.35	170.26	-0.05	61.65	156.57	147.43	9.14	17.132	
2,300.00	2,296.40	2,279.58	2,279.35	5.41	4.60	171.54	-2.26	63.00	171.76	162.19	9.57	17.948	
2,400.00	2,394.64	2,377.81	2,377.54	5.76	4.84	172.89	-4.63	63.97	191.86	181.89	9.97	19.240	
2,500.00	2,491.77	2,474.76	2,474.46	6.15	5.08	174.18	-7.19	64.69	216.97	206.62	10.34	20.977	
2,600.00	2,587.52	2,569.81	2,569.47	6.62	5.31	175.38	-10.02	65.23	247.13	236.45	10.68	23.130	
2,659.04	2,643.31	2,624.93	2,624.56	6.93	5.45	176.00	-11.70	65.58	267.36	256.49	10.87	24.590	
2,700.00	2,681.80	2,662.85	2,662.46	7.15	5.54	176.43	-12.98	65.82	282.05	270.98	11.07	25.482	
2,800.00	2,775.76	2,755.94	2,755.48	7.73	5.77	177.41	-16.53	66.34	318.06	306.51	11.55	27.532	
2,900.00	2,869.73	2,849.30	2,848.77	8.32	5.99	178.22	-20.17	66.76	354.08	342.04	12.04	29.401	
3,000.00	2,963.70	2,942.49	2,941.88	8.94	6.22	178.87	-23.81	67.17	390.14	377.60	12.54	31.111	
3,100.00	3,057.67	3,035.81	3,035.14	9.57	6.45	179.42	-27.45	67.58	426.22	413.18	13.04	32.678	
3,200.00	3,151.64	3,129.40	3,128.65	10.21	6.69	179.88	-31.11	67.91	462.27	448.72	13.55	34.112	
3,300.00	3,245.61	3,223.18	3,222.36	10.86	6.92	-179.71	-34.77	68.16	498.27	484.20	14.06	35.428	
3,400.00	3,339.57	3,317.53	3,316.64	11.52	7.15	-179.37	-38.33	68.29	534.12	519.54	14.58	36.630	
3,500.00	3,433.54	3,411.99	3,411.04	12.19	7.39	-179.08	-41.70	68.31	569.80	554.70	15.10	37.731	
3,600.00	3,527.51	3,506.26	3,505.26	12.86	7.62	-178.86	-44.74	68.31	605.34	589.72	15.63	38.740	
3,700.00	3,621.48	3,600.65	3,599.61	13.54	7.86	-178.69	-47.40	68.35	640.75	624.60	16.15	39.670	
3,800.00	3,715.45	3,695.24	3,694.18	14.23	8.09	-178.56	-49.88	68.33	676.03	659.35	16.68	40.529	
3,900.00	3,809.42	3,789.95	3,788.85	14.91	8.32	-178.43	-52.34	68.15	711.16	693.95	17.21	41.321	
4,000.00	3,903.38	3,882.94	3,881.81	15.60	8.56	-178.32	-54.76	67.92	746.25	728.51	17.74	42.066	
4,023.65	3,925.61	3,904.87	3,903.73	15.76	8.61	-178.29	-55.34	67.89	754.57	736.70	17.87	42.237	
4,100.00	3,997.69	3,975.98	3,974.82	16.22	8.79	-178.23	-57.19	67.81	780.50	762.14	18.36	42.513	
4,200.00	4,093.07	4,070.09	4,068.89	16.72	9.03	-178.15	-59.66	67.82	811.65	792.68	18.97	42.792	
4,300.00	4,189.44	4,165.16	4,163.93	17.17	9.27	-178.08	-62.14	67.95	839.58	820.02	19.55	42.936	
4,400.00	4,286.68	4,261.70	4,260.44	17.57	9.52	-178.00	-64.65	68.19	864.23	844.11	20.12	42.956	
4,500.00	4,384.68	4,359.40	4,358.10	17.93	9.77	-177.92	-67.20	68.44	885.50	864.84	20.66	42.863	
4,600.00	4,483.31	4,459.31	4,457.98	18.25	10.03	-177.83	-69.80	68.63	903.30	882.13	21.17	42.668	
4,700.00	4,582.46	4,560.94	4,559.57	18.51	10.29	-177.72	-72.44	68.53	917.40	895.75	21.65	42.368	
4,800.00	4,682.00	4,660.22	4,658.83	18.74	10.54	-177.60	-75.01	68.22	927.85	905.75	22.10	41.991	
4,900.00	4,781.81	4,758.04	4,756.60	18.91	10.79	-177.48	-77.56	68.09	935.00	912.49	22.50	41.552	
5,000.00	4,881.77	4,856.40	4,854.94	19.05	11.04	-177.35	-80.13	68.16	938.86	915.98	22.88	41.040	
5,023.73	4,905.50	4,879.83	4,878.36	19.07	11.10	117.95	-80.74	68.21	939.28	916.32	22.96	40.905	
5,100.00	4,981.77	4,955.12	4,953.62	19.16	11.30	118.05	-82.70	68.40	940.39	917.10	23.29	40.370	
5,200.00	5,081.77	5,055.87	5,054.33	19.28	11.56	118.18	-85.31	68.74	941.90	918.16	23.74	39.672	
5,300.00	5,181.77	5,158.30	5,156.73	19.40	11.82	118.32	-87.97	68.82	943.20	919.01	24.20	38.981	
5,400.00	5,281.77	5,258.38	5,256.78	19.53	12.08	118.47	-90.58	68.67	944.32	919.67	24.64	38.317	
5,500.00	5,381.77	5,356.84	5,355.21	19.65	12.34	118.60	-93.16	68.67	945.56	920.47	25.09	37.686	
5,600.00	5,481.77	5,454.46	5,452.79	19.78	12.59	118.74	-95.73	68.86	947.00	921.46	25.54	37.083	
5,700.00	5,581.77	5,551.40	5,549.69	19.91	12.85	118.87	-98.44	69.30	948.74	922.76	25.99	36.511	
5,800.00	5,681.77	5,648.22	5,646.47	20.05	13.10	119.00	-101.31	70.00	950.81	924.38	26.43	35.969	
5,900.00	5,781.77	5,744.92	5,743.12	20.18	13.36	119.12	-104.28	71.02	953.23	926.34	26.88	35.457	

CC - Min centre to center distance or covergent point, SF - min separation factor, ES - min ellipse separation

Weatherford International Ltd.

Anticollision Report

Company:	ANADARKO PETROLEUM CORP.	**Local Co-ordinate Reference:**	Well BONANZA 1023-5M3BS
Project:	UINTAH COUNTY, UTAH (nad 27)	**TVD Reference:**	WELL @ 5309.00ft (Original Well Elev)
Reference Site:	Bonanza 1023-5M PAD	**MD Reference:**	WELL @ 5309.00ft (Original Well Elev)
Site Error:	0.00ft	**North Reference:**	True
Reference Well:	BONANZA 1023-5M3BS	**Survey Calculation Method:**	Minimum Curvature
Well Error:	0.00ft	**Output errors are at**	2.00 sigma
Reference Wellbore	BONANZA 1023-5M3BS	**Database:**	EDM 2003.21 Single User Db
Reference Design:	PLAN #1 4-27-10 RHS	**Offset TVD Reference:**	Offset Datum

Offset Design Bonanza 1023-5M PAD - Bonanza 1023-5M EXISTING - Bonanza 1023-5M EXISTING - Bonanza 1023

Offset Site Error: 0.00 ft

Survey Program: 100-NS-GYRO-MS

Offset Well Error: 0.00 ft

Reference Measured Depth (ft)	Reference Vertical Depth (ft)	Offset Measured Depth (ft)	Offset Vertical Depth (ft)	Semi Major Axis Reference (ft)	Semi Major Axis Offset (ft)	Highside Toolface (°)	Offset Wellbore Centre +N/-S (ft)	Offset Wellbore Centre +E/-W (ft)	Distance Between Centres (ft)	Distance Between Ellipses (ft)	Minimum Separation (ft)	Separation Factor	Warning
6,000.00	5,881.77	5,843.01	5,841.14	20.32	13.62	119.25	-107.40	72.34	955.95	928.62	27.34	34.968	
6,100.00	5,981.77	5,942.95	5,941.02	20.45	13.88	119.37	-110.60	73.74	958.74	930.94	27.80	34.490	
6,200.00	6,081.77	6,042.81	6,040.82	20.59	14.14	119.50	-113.79	75.14	961.54	933.28	28.26	34.027	
6,300.00	6,181.77	6,142.57	6,140.52	20.73	14.41	119.62	-116.96	76.57	964.35	935.63	28.72	33.579	
6,400.00	6,281.77	6,241.76	6,239.65	20.87	14.67	119.74	-120.15	78.00	967.20	938.02	29.18	33.147	
6,500.00	6,381.77	6,340.14	6,337.96	21.02	14.93	119.89	-123.72	79.34	970.19	940.55	29.64	32.733	
6,600.00	6,481.77	6,439.81	6,437.53	21.16	15.19	120.06	-127.78	80.60	973.32	943.21	30.11	32.330	
6,700.00	6,581.77	6,541.53	6,539.17	21.31	15.46	120.23	-131.85	81.79	976.34	945.76	30.58	31.929	
6,800.00	6,681.77	6,642.30	6,639.86	21.45	15.73	120.39	-135.71	82.87	979.20	948.15	31.05	31.537	
6,900.00	6,781.77	6,741.74	6,739.21	21.60	15.99	120.57	-139.70	83.85	982.08	950.56	31.52	31.160	
7,000.00	6,881.77	6,842.13	6,839.51	21.75	16.26	120.75	-143.87	84.77	984.99	953.01	31.99	30.792	
7,100.00	6,981.77	6,943.93	6,941.25	21.90	16.53	120.89	-147.49	85.91	987.77	955.31	32.46	30.429	
7,200.00	7,081.77	7,044.92	7,042.19	22.05	16.80	121.00	-150.37	87.26	990.38	957.45	32.93	30.074	
7,300.00	7,181.77	7,144.88	7,142.09	22.21	17.06	121.09	-153.09	88.63	992.97	959.57	33.40	29.730	
7,400.00	7,281.77	7,245.56	7,242.73	22.36	17.32	121.18	-155.81	90.01	995.54	961.67	33.87	29.394	
7,500.00	7,381.77	7,347.15	7,344.28	22.52	17.59	121.27	-158.37	91.35	997.97	963.63	34.34	29.061	
7,600.00	7,481.77	7,448.19	7,445.28	22.68	17.85	121.35	-160.73	92.62	1,000.26	965.45	34.81	28.734	
7,700.00	7,581.77	7,450.00	7,447.09	22.83	17.86	121.35	-160.77	92.64	1,007.30	972.28	35.02	28.763	
7,800.00	7,681.77	7,450.00	7,447.09	22.99	17.86	121.35	-160.77	92.64	1,024.10	988.88	35.23	29.072	
7,900.00	7,781.77	7,450.00	7,447.09	23.15	17.86	121.35	-160.77	92.64	1,050.20	1,014.77	35.43	29.640	
8,000.00	7,881.77	7,450.00	7,447.09	23.31	17.86	121.35	-160.77	92.64	1,084.92	1,049.28	35.64	30.443	
8,100.00	7,981.77	7,450.00	7,447.09	23.48	17.86	121.35	-160.77	92.64	1,127.47	1,091.63	35.84	31.455	
8,200.00	8,081.77	7,450.00	7,447.09	23.64	17.86	121.35	-160.77	92.64	1,177.00	1,140.95	36.05	32.648	
8,300.00	8,181.77	7,450.00	7,447.09	23.81	17.86	121.35	-160.77	92.64	1,232.66	1,196.41	36.26	33.996	
8,400.00	8,281.77	7,450.00	7,447.09	23.97	17.86	121.35	-160.77	92.64	1,293.68	1,257.21	36.47	35.476	
8,500.00	8,381.77	7,450.00	7,447.09	24.14	17.86	121.35	-160.77	92.64	1,359.31	1,322.64	36.67	37.064	
8,575.23	8,457.00	7,450.00	7,447.09	24.26	17.86	121.35	-160.77	92.64	1,411.35	1,374.52	36.83	38.319	

Anadarko Petroleum Corporation

Weatherford International Ltd.

Anticollision Report

Weatherford

Company:	ANADARKO PETROLEUM CORP.	**Local Co-ordinate Reference:**	Well BONANZA 1023-5M3BS
Project:	UINTAH COUNTY, UTAH (nad 27)	**TVD Reference:**	WELL @ 5309.00ft (Original Well Elev)
Reference Site:	Bonanza 1023-5M PAD	**MD Reference:**	WELL @ 5309.00ft (Original Well Elev)
Site Error:	0.00ft	**North Reference:**	True
Reference Well:	BONANZA 1023-5M3BS	**Survey Calculation Method:**	Minimum Curvature
Well Error:	0.00ft	**Output errors are at**	2.00 sigma
Reference Wellbore	BONANZA 1023-5M3BS	**Database:**	EDM 2003.21 Single User Db
Reference Design:	PLAN #1 4-27-10 RHS	**Offset TVD Reference:**	Offset Datum

Offset Design Bonanza 1023-5M PAD - BONANZA 1023-5M1AS - BONANZA 1023-5M1AS - PLAN #1 4-27-10 RHS — **Offset Site Error:** 0.00 ft

Survey Program: 0-MWD — **Offset Well Error:** 0.00 ft

Reference Measured Depth (ft)	Reference Vertical Depth (ft)	Offset Measured Depth (ft)	Offset Vertical Depth (ft)	Semi Major Axis Reference (ft)	Semi Major Axis Offset (ft)	Highside Toolface (°)	Offset Wellbore Centre +N/-S (ft)	Offset Wellbore Centre +E/-W (ft)	Distance Between Centres (ft)	Distance Between Ellipses (ft)	Minimum Separation (ft)	Separation Factor	Warning
0.00	0.00	0.00	0.00	0.00	0.00	75.23	5.10	19.34	20.00				
100.00	100.00	100.00	100.00	0.10	0.10	75.23	5.10	19.34	20.00	19.80	0.19	103.456	
200.00	200.00	200.00	200.00	0.32	0.32	75.23	5.10	19.34	20.00	19.36	0.64	31.109	
300.00	300.00	300.00	300.00	0.55	0.55	75.23	5.10	19.34	20.00	18.91	1.09	18.307	CC, ES
400.00	399.98	399.73	399.71	0.77	0.77	138.59	6.83	19.48	21.92	20.39	1.54	14.254	
450.00	449.93	449.52	449.45	0.88	0.89	137.17	8.99	19.67	24.35	22.58	1.76	13.800	
500.00	499.86	499.43	499.29	0.99	1.00	135.83	11.59	19.89	27.27	25.28	1.99	13.713	
600.00	599.73	599.25	598.97	1.22	1.23	133.84	16.79	20.33	33.15	30.71	2.44	13.570	
700.00	699.59	699.07	698.66	1.46	1.47	132.46	22.00	20.77	39.06	36.15	2.90	13.451	
800.00	799.45	798.89	798.34	1.69	1.70	131.44	27.20	21.22	44.98	41.61	3.37	13.355	
900.00	899.31	898.71	898.03	1.93	1.94	130.66	32.41	21.66	50.91	47.08	3.83	13.276	
1,000.00	999.18	998.53	997.71	2.17	2.18	130.04	37.62	22.10	56.86	52.55	4.30	13.212	
1,100.00	1,099.04	1,098.36	1,097.40	2.42	2.42	129.54	42.82	22.54	62.80	58.03	4.77	13.158	
1,200.00	1,198.90	1,198.18	1,197.08	2.66	2.66	129.12	48.03	22.99	68.76	63.51	5.24	13.112	
1,300.00	1,298.77	1,298.00	1,296.77	2.90	2.90	128.78	53.23	23.43	74.71	68.99	5.71	13.073	
1,400.00	1,398.63	1,397.82	1,396.45	3.14	3.14	128.48	58.44	23.87	80.67	74.48	6.19	13.040	
1,500.00	1,498.49	1,497.64	1,496.14	3.39	3.38	128.22	63.64	24.31	86.63	79.97	6.66	13.010	
1,600.00	1,598.36	1,597.46	1,595.82	3.63	3.62	128.00	68.85	24.76	92.59	85.45	7.13	12.984	
1,700.00	1,698.22	1,697.28	1,695.51	3.87	3.86	127.80	74.05	25.20	98.55	90.94	7.60	12.961	
1,800.00	1,798.08	1,797.11	1,795.19	4.12	4.10	127.63	79.26	25.64	104.51	96.43	8.08	12.941	
1,900.00	1,897.94	1,896.93	1,894.88	4.36	4.34	127.47	84.47	26.09	110.47	101.92	8.55	12.923	
2,000.00	1,997.81	1,996.75	1,994.56	4.60	4.58	127.34	89.67	26.53	116.44	107.41	9.02	12.906	
2,092.32	2,090.00	2,088.90	2,086.59	4.83	4.81	127.22	94.48	26.94	121.94	112.48	9.46	12.892	SF
2,100.00	2,097.67	2,096.57	2,094.25	4.85	4.82	127.20	94.88	26.97	122.41	112.92	9.49	12.893	
2,200.00	2,197.32	2,192.95	2,190.34	5.11	5.07	127.10	102.04	27.58	131.39	121.41	9.97	13.174	
2,300.00	2,296.40	2,288.17	2,284.82	5.41	5.34	126.82	113.84	28.58	146.14	135.65	10.49	13.933	
2,400.00	2,394.64	2,381.98	2,377.20	5.76	5.65	126.41	130.04	29.96	166.58	155.53	11.05	15.078	
2,500.00	2,491.77	2,473.97	2,466.91	6.15	5.98	125.88	150.30	31.68	192.54	180.88	11.66	16.516	
2,600.00	2,587.52	2,563.78	2,553.44	6.62	6.36	125.27	174.21	33.72	223.85	211.52	12.33	18.155	
2,659.04	2,643.31	2,615.65	2,602.88	6.93	6.59	124.86	189.85	35.05	244.77	232.01	12.76	19.187	
2,700.00	2,681.80	2,651.19	2,636.49	7.15	6.77	124.90	201.34	36.03	260.07	246.98	13.09	19.869	
2,800.00	2,775.76	2,742.32	2,722.15	7.73	7.24	124.69	232.31	38.66	298.29	284.34	13.95	21.376	
2,900.00	2,869.73	2,834.70	2,808.97	8.32	7.74	124.52	263.79	41.34	336.56	321.71	14.86	22.656	
3,000.00	2,963.70	2,927.08	2,895.78	8.94	8.25	124.38	295.27	44.01	374.83	359.05	15.79	23.745	
3,100.00	3,057.67	3,019.47	2,982.60	9.57	8.78	124.27	326.74	46.69	413.11	396.36	16.74	24.677	
3,200.00	3,151.64	3,111.85	3,069.41	10.21	9.32	124.17	358.22	49.37	451.38	433.66	17.72	25.479	
3,300.00	3,245.61	3,204.23	3,156.22	10.86	9.87	124.09	389.70	52.05	489.65	470.95	18.71	26.174	
3,400.00	3,339.57	3,296.62	3,243.04	11.52	10.42	124.02	421.18	54.72	527.93	508.21	19.72	26.778	
3,500.00	3,433.54	3,389.00	3,329.85	12.19	10.99	123.97	452.65	57.40	566.21	545.47	20.74	27.306	
3,600.00	3,527.51	3,481.38	3,416.67	12.86	11.55	123.91	484.13	60.08	604.48	582.72	21.77	27.772	
3,700.00	3,621.48	3,573.77	3,503.48	13.54	12.13	123.87	515.61	62.75	642.76	619.95	22.81	28.183	
3,800.00	3,715.45	3,666.15	3,590.29	14.23	12.71	123.83	547.08	65.43	681.04	657.18	23.85	28.550	
3,900.00	3,809.42	3,758.53	3,677.11	14.91	13.29	123.79	578.56	68.11	719.32	694.41	24.91	28.877	
4,000.00	3,903.38	3,850.91	3,763.92	15.60	13.87	123.76	610.04	70.79	757.59	731.62	25.97	29.170	
4,023.65	3,925.61	3,872.77	3,784.46	15.76	14.01	123.75	617.48	71.42	766.65	740.42	26.22	29.235	
4,100.00	3,997.69	3,943.50	3,850.93	16.22	14.46	124.18	641.58	73.47	795.35	768.30	27.04	29.413	
4,200.00	4,093.07	4,036.71	3,938.52	16.72	15.05	124.52	673.34	76.17	831.34	803.30	28.04	29.646	
4,300.00	4,189.44	4,130.46	4,026.61	17.17	15.65	124.65	705.28	78.89	865.51	836.49	29.02	29.828	
4,400.00	4,286.68	4,224.62	4,115.10	17.57	16.26	124.58	737.36	81.62	897.89	867.93	29.96	29.969	
4,500.00	4,384.68	4,328.34	4,212.72	17.93	16.87	124.28	772.29	84.59	928.30	897.44	30.87	30.075	
4,600.00	4,483.31	4,446.27	4,324.98	18.25	17.42	123.87	808.23	87.64	955.12	923.43	31.69	30.141	
4,700.00	4,582.46	4,566.79	4,441.15	18.51	17.95	123.45	840.18	90.36	977.87	945.43	32.43	30.149	

CC - Min centre to center distance or covergent point, SF - min separation factor, ES - min ellipse separation

Weatherford International Ltd.

Anticollision Report

Company:	ANADARKO PETROLEUM CORP.	**Local Co-ordinate Reference:**	Well BONANZA 1023-5M3BS
Project:	UINTAH COUNTY, UTAH (nad 27)	**TVD Reference:**	WELL @ 5309.00ft (Original Well Elev)
Reference Site:	Bonanza 1023-5M PAD	**MD Reference:**	WELL @ 5309.00ft (Original Well Elev)
Site Error:	0.00ft	**North Reference:**	True
Reference Well:	BONANZA 1023-5M3BS	**Survey Calculation Method:**	Minimum Curvature
Well Error:	0.00ft	**Output errors are at**	2.00 sigma
Reference Wellbore	BONANZA 1023-5M3BS	**Database:**	EDM 2003.21 Single User Db
Reference Design:	PLAN #1 4-27-10 RHS	**Offset TVD Reference:**	Offset Datum

Offset Design Bonanza 1023-5M PAD - BONANZA 1023-5M1AS - BONANZA 1023-5M1AS - PLAN #1 4-27-10 RHS

Offset Site Error: 0.00 ft

Survey Program: 0-MWD

Offset Well Error: 0.00 ft

Reference Measured Depth (ft)	Reference Vertical Depth (ft)	Offset Measured Depth (ft)	Offset Vertical Depth (ft)	Semi Major Axis Reference (ft)	Semi Major Axis Offset (ft)	Highside Toolface (°)	Offset Wellbore Centre +N/-S (ft)	Offset Wellbore Centre +E/-W (ft)	Distance Between Centres (ft)	Distance Between Ellipses (ft)	Minimum Separation (ft)	Separation Factor	Warning
4,800.00	4,682.00	4,689.60	4,560.81	18.74	18.42	123.01	867.69	92.70	996.41	963.31	33.10	30.105	
4,900.00	4,781.81	4,814.36	4,683.46	18.91	18.84	122.56	890.38	94.63	1,010.64	976.98	33.67	30.020	
5,000.00	4,881.77	4,940.68	4,808.55	19.05	19.20	122.09	907.92	96.12	1,020.48	986.35	34.14	29.895	
5,023.73	4,905.50	4,970.85	4,838.52	19.07	19.27	57.25	911.29	96.41	1,022.16	987.93	34.23	29.858	
5,100.00	4,981.77	5,068.20	4,935.47	19.16	19.49	56.86	920.03	97.15	1,026.39	991.86	34.52	29.730	
5,200.00	5,081.77	5,196.56	5,063.65	19.28	19.71	56.57	926.52	97.70	1,029.53	994.66	34.87	29.526	
5,300.00	5,181.77	5,314.69	5,181.77	19.40	19.86	56.52	927.67	97.80	1,030.08	994.93	35.16	29.300	
5,400.00	5,281.77	5,414.69	5,281.77	19.53	19.98	56.52	927.67	97.80	1,030.08	994.65	35.43	29.075	
5,500.00	5,381.77	5,514.69	5,381.77	19.65	20.10	56.52	927.67	97.80	1,030.08	994.38	35.70	28.851	
5,600.00	5,481.77	5,614.69	5,481.77	19.78	20.22	56.52	927.67	97.80	1,030.08	994.10	35.98	28.627	
5,700.00	5,581.77	5,714.69	5,581.77	19.91	20.35	56.52	927.67	97.80	1,030.08	993.82	36.27	28.404	
5,800.00	5,681.77	5,814.69	5,681.77	20.05	20.47	56.52	927.67	97.80	1,030.08	993.53	36.55	28.182	
5,900.00	5,781.77	5,914.69	5,781.77	20.18	20.60	56.52	927.67	97.80	1,030.08	993.24	36.84	27.961	
6,000.00	5,881.77	6,014.69	5,881.77	20.32	20.73	56.52	927.67	97.80	1,030.08	992.95	37.13	27.741	
6,100.00	5,981.77	6,114.69	5,981.77	20.45	20.87	56.52	927.67	97.80	1,030.08	992.66	37.43	27.522	
6,200.00	6,081.77	6,214.69	6,081.77	20.59	21.00	56.52	927.67	97.80	1,030.08	992.36	37.73	27.305	
6,300.00	6,181.77	6,314.69	6,181.77	20.73	21.14	56.52	927.67	97.80	1,030.08	992.06	38.03	27.088	
6,400.00	6,281.77	6,414.69	6,281.77	20.87	21.27	56.52	927.67	97.80	1,030.08	991.75	38.33	26.873	
6,500.00	6,381.77	6,514.69	6,381.77	21.02	21.41	56.52	927.67	97.80	1,030.08	991.44	38.64	26.660	
6,600.00	6,481.77	6,614.69	6,481.77	21.16	21.55	56.52	927.67	97.80	1,030.08	991.13	38.95	26.448	
6,700.00	6,581.77	6,714.69	6,581.77	21.31	21.69	56.52	927.67	97.80	1,030.08	990.82	39.26	26.237	
6,800.00	6,681.77	6,814.69	6,681.77	21.45	21.83	56.52	927.67	97.80	1,030.08	990.51	39.58	26.028	
6,900.00	6,781.77	6,914.69	6,781.77	21.60	21.98	56.52	927.67	97.80	1,030.08	990.19	39.89	25.821	
7,000.00	6,881.77	7,014.69	6,881.77	21.75	22.12	56.52	927.67	97.80	1,030.08	989.87	40.21	25.615	
7,100.00	6,981.77	7,114.69	6,981.77	21.90	22.27	56.52	927.67	97.80	1,030.08	989.55	40.54	25.411	
7,200.00	7,081.77	7,214.69	7,081.77	22.05	22.42	56.52	927.67	97.80	1,030.08	989.22	40.86	25.209	
7,300.00	7,181.77	7,314.69	7,181.77	22.21	22.57	56.52	927.67	97.80	1,030.08	988.89	41.19	25.009	
7,400.00	7,281.77	7,414.69	7,281.77	22.36	22.72	56.52	927.67	97.80	1,030.08	988.56	41.52	24.810	
7,500.00	7,381.77	7,514.69	7,381.77	22.52	22.87	56.52	927.67	97.80	1,030.08	988.23	41.85	24.613	
7,600.00	7,481.77	7,614.69	7,481.77	22.68	23.02	56.52	927.67	97.80	1,030.08	987.90	42.18	24.418	
7,700.00	7,581.77	7,714.69	7,581.77	22.83	23.18	56.52	927.67	97.80	1,030.08	987.56	42.52	24.225	
7,800.00	7,681.77	7,814.69	7,681.77	22.99	23.33	56.52	927.67	97.80	1,030.08	987.22	42.86	24.034	
7,900.00	7,781.77	7,914.69	7,781.77	23.15	23.49	56.52	927.67	97.80	1,030.08	986.88	43.20	23.845	
8,000.00	7,881.77	8,014.69	7,881.77	23.31	23.64	56.52	927.67	97.80	1,030.08	986.54	43.54	23.657	
8,100.00	7,981.77	8,114.69	7,981.77	23.48	23.80	56.52	927.67	97.80	1,030.08	986.20	43.89	23.472	
8,200.00	8,081.77	8,214.69	8,081.77	23.64	23.96	56.52	927.67	97.80	1,030.08	985.85	44.23	23.288	
8,300.00	8,181.77	8,314.69	8,181.77	23.81	24.12	56.52	927.67	97.80	1,030.08	985.50	44.58	23.106	
8,400.00	8,281.77	8,414.69	8,281.77	23.97	24.28	56.52	927.67	97.80	1,030.08	985.15	44.93	22.926	
8,500.00	8,381.77	8,514.69	8,381.77	24.14	24.45	56.52	927.67	97.80	1,030.08	984.80	45.28	22.748	
8,549.47	8,431.24	8,564.16	8,431.24	24.22	24.53	56.52	927.67	97.80	1,030.08	984.63	45.46	22.661	
8,575.23	8,457.00	8,587.92	8,455.00	24.26	24.57	56.52	927.67	97.80	1,030.08	984.54	45.54	22.618	

Anadarko Petroleum Corporation

Weatherford International Ltd.

Anticollision Report

Weatherford

Company:	ANADARKO PETROLEUM CORP.	**Local Co-ordinate Reference:**	Well BONANZA 1023-5M3BS
Project:	UINTAH COUNTY, UTAH (nad 27)	**TVD Reference:**	WELL @ 5309.00ft (Original Well Elev)
Reference Site:	Bonanza 1023-5M PAD	**MD Reference:**	WELL @ 5309.00ft (Original Well Elev)
Site Error:	0.00ft	**North Reference:**	True
Reference Well:	BONANZA 1023-5M3BS	**Survey Calculation Method:**	Minimum Curvature
Well Error:	0.00ft	**Output errors are at**	2.00 sigma
Reference Wellbore	BONANZA 1023-5M3BS	**Database:**	EDM 2003.21 Single User Db
Reference Design:	PLAN #1 4-27-10 RHS	**Offset TVD Reference:**	Offset Datum

Offset Design Bonanza 1023-5M PAD - BONANZA 1023-5M1CS - BONANZA 1023-5M1CS - PLAN #1 4-27-10 RHS

Offset Site Error: 0.00 ft

Survey Program: 0-MWD

Offset Well Error: 0.00 ft

Reference Measured Depth (ft)	Reference Vertical Depth (ft)	Offset Measured Depth (ft)	Offset Vertical Depth (ft)	Semi Major Axis Reference (ft)	Semi Major Axis Offset (ft)	Highside Toolface (°)	Offset Wellbore Centre +N/-S (ft)	Offset Wellbore Centre +E/-W (ft)	Distance Between Centres (ft)	Distance Between Ellipses (ft)	Minimum Separation (ft)	Separation Factor	Warning
0.00	0.00	0.00	0.00	0.00	0.00	75.02	2.55	9.53	9.86				
100.00	100.00	100.00	100.00	0.10	0.10	75.02	2.55	9.53	9.86	9.67	0.19	51.027	
200.00	200.00	200.00	200.00	0.32	0.32	75.02	2.55	9.53	9.86	9.22	0.64	15.344	
300.00	300.00	300.00	300.00	0.55	0.55	75.02	2.55	9.53	9.86	8.77	1.09	9.030	CC, ES
400.00	399.98	399.90	399.86	0.77	0.78	132.33	5.12	9.05	11.49	9.95	1.54	7.469	SF
450.00	449.93	449.75	449.59	0.88	0.90	125.66	8.32	8.44	13.71	11.95	1.77	7.755	
500.00	499.86	499.46	499.10	0.99	1.02	118.14	12.78	7.61	16.83	14.83	2.00	8.409	
600.00	599.73	598.25	597.04	1.22	1.28	102.37	25.39	5.23	25.96	23.47	2.50	10.392	
700.00	699.59	695.77	692.94	1.46	1.60	90.32	42.71	1.98	40.02	37.01	3.01	13.280	
800.00	799.45	791.54	786.13	1.69	1.99	82.24	64.37	-2.09	59.28	55.74	3.53	16.778	
900.00	899.31	886.00	876.88	1.93	2.45	76.81	90.09	-6.93	83.46	79.40	4.06	20.564	
1,000.00	999.18	982.42	969.13	2.17	2.97	73.49	117.69	-12.12	109.39	104.83	4.57	23.955	
1,100.00	1,099.04	1,078.85	1,061.38	2.42	3.50	71.44	145.29	-17.30	135.54	130.47	5.08	26.705	
1,200.00	1,198.90	1,175.28	1,153.63	2.66	4.03	70.05	172.88	-22.49	161.80	156.21	5.59	28.949	
1,300.00	1,298.77	1,271.71	1,245.88	2.90	4.58	69.05	200.48	-27.68	188.12	182.01	6.11	30.809	
1,400.00	1,398.63	1,368.14	1,338.13	3.14	5.13	68.30	228.07	-32.86	214.48	207.85	6.63	32.365	
1,500.00	1,498.49	1,464.57	1,430.38	3.39	5.68	67.71	255.67	-38.05	240.87	233.72	7.15	33.689	
1,600.00	1,598.36	1,561.00	1,522.63	3.63	6.23	67.24	283.27	-43.24	267.27	259.60	7.67	34.825	
1,700.00	1,698.22	1,657.43	1,614.89	3.87	6.79	66.85	310.86	-48.43	293.69	285.49	8.20	35.810	
1,800.00	1,798.08	1,753.86	1,707.14	4.12	7.35	66.53	338.46	-53.61	320.12	311.39	8.73	36.673	
1,900.00	1,897.94	1,850.29	1,799.39	4.36	7.90	66.25	366.05	-58.80	346.56	337.30	9.26	37.433	
2,000.00	1,997.81	1,946.72	1,891.64	4.60	8.46	66.02	393.65	-63.99	373.01	363.22	9.79	38.108	
2,092.32	2,090.00	2,035.74	1,976.80	4.83	8.98	65.83	419.13	-68.78	397.43	387.15	10.28	38.667	
2,100.00	2,097.67	2,043.15	1,983.89	4.85	9.02	65.76	421.25	-69.18	399.45	389.13	10.32	38.713	
2,200.00	2,197.32	2,139.89	2,076.44	5.11	9.58	65.25	448.93	-74.38	424.70	413.82	10.87	39.053	
2,300.00	2,296.40	2,248.64	2,180.80	5.41	10.12	65.57	478.95	-80.02	446.87	435.38	11.49	38.881	
2,400.00	2,394.64	2,361.80	2,290.40	5.76	10.59	66.76	506.61	-85.22	463.92	451.74	12.18	38.103	
2,500.00	2,491.77	2,475.37	2,401.31	6.15	11.02	68.75	530.62	-89.73	476.07	463.12	12.95	36.759	
2,600.00	2,587.52	2,588.37	2,512.44	6.62	11.40	71.51	550.74	-93.52	483.89	470.05	13.84	34.955	
2,659.04	2,643.31	2,654.44	2,577.71	6.93	11.60	73.49	560.76	-95.40	486.80	472.36	14.43	33.729	
2,700.00	2,681.80	2,700.00	2,622.84	7.15	11.73	75.01	566.91	-96.56	488.32	473.46	14.86	32.861	
2,800.00	2,775.76	2,810.78	2,732.90	7.73	12.00	78.78	579.28	-98.88	491.12	475.19	15.93	30.830	
2,900.00	2,869.73	2,920.71	2,842.47	8.32	12.23	82.66	587.94	-100.51	492.82	475.79	17.03	28.943	
3,000.00	2,963.70	3,029.56	2,951.19	8.94	12.40	86.69	592.94	-101.45	493.71	475.58	18.13	27.228	
3,100.00	3,057.67	3,136.05	3,057.67	9.57	12.54	90.82	594.41	-101.73	494.14	474.92	19.22	25.709	
3,200.00	3,151.64	3,230.02	3,151.64	10.21	12.64	94.54	594.41	-101.73	495.84	475.60	20.24	24.497	
3,300.00	3,245.61	3,323.99	3,245.61	10.86	12.74	98.22	594.41	-101.73	499.88	478.65	21.24	23.539	
3,400.00	3,339.57	3,417.96	3,339.57	11.52	12.85	101.83	594.41	-101.73	506.21	484.02	22.19	22.812	
3,500.00	3,433.54	3,511.92	3,433.54	12.19	12.96	105.35	594.41	-101.73	514.73	491.64	23.10	22.287	
3,600.00	3,527.51	3,605.89	3,527.51	12.86	13.07	108.75	594.41	-101.73	525.35	501.40	23.95	21.939	
3,700.00	3,621.48	3,699.86	3,621.48	13.54	13.19	112.03	594.41	-101.73	537.94	513.20	24.74	21.744	
3,800.00	3,715.45	3,793.83	3,715.45	14.23	13.30	115.16	594.41	-101.73	552.36	526.88	25.48	21.680	
3,900.00	3,809.42	3,887.80	3,809.42	14.91	13.42	118.13	594.41	-101.73	568.47	542.31	26.16	21.729	
4,000.00	3,903.38	3,981.77	3,903.38	15.60	13.55	120.95	594.41	-101.73	586.14	559.35	26.80	21.875	
4,023.65	3,925.61	4,003.99	3,925.61	15.76	13.57	121.60	594.41	-101.73	590.54	563.60	26.94	21.922	
4,100.00	3,997.69	4,076.07	3,997.69	16.22	13.67	123.79	594.41	-101.73	604.68	577.30	27.38	22.086	
4,200.00	4,093.07	4,171.45	4,093.07	16.72	13.80	126.31	594.41	-101.73	622.47	594.62	27.86	22.346	
4,300.00	4,189.44	4,267.82	4,189.44	17.17	13.93	128.46	594.41	-101.73	639.05	610.76	28.29	22.586	
4,400.00	4,286.68	4,365.07	4,286.68	17.57	14.06	130.26	594.41	-101.73	654.08	625.38	28.70	22.793	
4,500.00	4,384.68	4,463.06	4,384.68	17.93	14.20	131.75	594.41	-101.73	667.28	638.21	29.07	22.954	
4,600.00	4,483.31	4,561.69	4,483.31	18.25	14.34	132.95	594.41	-101.73	678.46	649.04	29.42	23.063	
4,700.00	4,582.46	4,660.84	4,582.46	18.51	14.49	133.87	594.41	-101.73	687.44	657.69	29.74	23.113	

CC - Min centre to center distance or covergent point, SF - min separation factor, ES - min ellipse separation

Anadarko Petroleum Corporation

Weatherford International Ltd.

Anticollision Report

Weatherford

Company:	ANADARKO PETROLEUM CORP.	**Local Co-ordinate Reference:**	Well BONANZA 1023-5M3BS
Project:	UINTAH COUNTY, UTAH (nad 27)	**TVD Reference:**	WELL @ 5309.00ft (Original Well Elev)
Reference Site:	Bonanza 1023-5M PAD	**MD Reference:**	WELL @ 5309.00ft (Original Well Elev)
Site Error:	0.00ft	**North Reference:**	True
Reference Well:	BONANZA 1023-5M3BS	**Survey Calculation Method:**	Minimum Curvature
Well Error:	0.00ft	**Output errors are at**	2.00 sigma
Reference Wellbore	BONANZA 1023-5M3BS	**Database:**	EDM 2003.21 Single User Db
Reference Design:	PLAN #1 4-27-10 RHS	**Offset TVD Reference:**	Offset Datum

Offset Design Bonanza 1023-5M PAD - BONANZA 1023-5M1CS - BONANZA 1023-5M1CS - PLAN #1 4-27-10 RHS

Offset Site Error: 0.00 ft

Survey Program: 0-MWD

Offset Well Error: 0.00 ft

Reference Measured Depth (ft)	Reference Vertical Depth (ft)	Offset Measured Depth (ft)	Offset Vertical Depth (ft)	Semi Major Axis Reference (ft)	Semi Major Axis Offset (ft)	Highside Toolface (°)	Offset Wellbore Centre +N/-S (ft)	Offset Wellbore Centre +E/-W (ft)	Distance Between Centres (ft)	Distance Between Ellipses (ft)	Minimum Separation (ft)	Separation Factor	Warning
4,800.00	4,682.00	4,760.38	4,682.00	18.74	14.63	134.53	594.41	-101.73	694.10	664.06	30.05	23.101	
4,900.00	4,781.81	4,860.19	4,781.81	18.91	14.78	134.94	594.41	-101.73	698.37	668.04	30.33	23.025	
5,000.00	4,881.77	4,960.15	4,881.77	19.05	14.93	135.12	594.41	-101.73	700.19	669.60	30.60	22.884	
5,023.73	4,905.50	4,983.88	4,905.50	19.07	14.97	70.40	594.41	-101.73	700.26	669.60	30.66	22.840	
5,100.00	4,981.77	5,060.15	4,981.77	19.16	15.09	70.40	594.41	-101.73	700.26	669.38	30.88	22.678	
5,200.00	5,081.77	5,160.15	5,081.77	19.28	15.24	70.40	594.41	-101.73	700.26	669.09	31.18	22.461	
5,300.00	5,181.77	5,260.15	5,181.77	19.40	15.40	70.40	594.41	-101.73	700.26	668.79	31.48	22.247	
5,400.00	5,281.77	5,360.15	5,281.77	19.53	15.55	70.40	594.41	-101.73	700.26	668.48	31.78	22.034	
5,500.00	5,381.77	5,460.15	5,381.77	19.65	15.71	70.40	594.41	-101.73	700.26	668.17	32.09	21.822	
5,600.00	5,481.77	5,560.15	5,481.77	19.78	15.87	70.40	594.41	-101.73	700.26	667.86	32.40	21.613	
5,700.00	5,581.77	5,660.15	5,581.77	19.91	16.04	70.40	594.41	-101.73	700.26	667.55	32.71	21.405	
5,800.00	5,681.77	5,760.15	5,681.77	20.05	16.20	70.40	594.41	-101.73	700.26	667.23	33.03	21.199	
5,900.00	5,781.77	5,860.15	5,781.77	20.18	16.37	70.40	594.41	-101.73	700.26	666.91	33.35	20.996	
6,000.00	5,881.77	5,960.15	5,881.77	20.32	16.53	70.40	594.41	-101.73	700.26	666.59	33.68	20.794	
6,100.00	5,981.77	6,060.15	5,981.77	20.45	16.70	70.40	594.41	-101.73	700.26	666.26	34.00	20.595	
6,200.00	6,081.77	6,160.15	6,081.77	20.59	16.87	70.40	594.41	-101.73	700.26	665.93	34.33	20.397	
6,300.00	6,181.77	6,260.15	6,181.77	20.73	17.04	70.40	594.41	-101.73	700.26	665.60	34.66	20.202	
6,400.00	6,281.77	6,360.15	6,281.77	20.87	17.21	70.40	594.41	-101.73	700.26	665.27	35.00	20.009	
6,500.00	6,381.77	6,460.15	6,381.77	21.02	17.39	70.40	594.41	-101.73	700.26	664.93	35.33	19.818	
6,600.00	6,481.77	6,560.15	6,481.77	21.16	17.56	70.40	594.41	-101.73	700.26	664.59	35.67	19.630	
6,700.00	6,581.77	6,660.15	6,581.77	21.31	17.74	70.40	594.41	-101.73	700.26	664.25	36.02	19.443	
6,800.00	6,681.77	6,760.15	6,681.77	21.45	17.91	70.40	594.41	-101.73	700.26	663.90	36.36	19.259	
6,900.00	6,781.77	6,860.15	6,781.77	21.60	18.09	70.40	594.41	-101.73	700.26	663.56	36.71	19.078	
7,000.00	6,881.77	6,960.15	6,881.77	21.75	18.27	70.40	594.41	-101.73	700.26	663.21	37.05	18.898	
7,100.00	6,981.77	7,060.15	6,981.77	21.90	18.45	70.40	594.41	-101.73	700.26	662.86	37.41	18.721	
7,200.00	7,081.77	7,160.15	7,081.77	22.05	18.63	70.40	594.41	-101.73	700.26	662.51	37.76	18.546	
7,300.00	7,181.77	7,260.15	7,181.77	22.21	18.81	70.40	594.41	-101.73	700.26	662.15	38.11	18.373	
7,400.00	7,281.77	7,360.15	7,281.77	22.36	19.00	70.40	594.41	-101.73	700.26	661.79	38.47	18.203	
7,500.00	7,381.77	7,460.15	7,381.77	22.52	19.18	70.40	594.41	-101.73	700.26	661.43	38.83	18.035	
7,600.00	7,481.77	7,560.15	7,481.77	22.68	19.36	70.40	594.41	-101.73	700.26	661.07	39.19	17.869	
7,700.00	7,581.77	7,660.15	7,581.77	22.83	19.55	70.40	594.41	-101.73	700.26	660.71	39.55	17.705	
7,800.00	7,681.77	7,760.15	7,681.77	22.99	19.74	70.40	594.41	-101.73	700.26	660.35	39.92	17.543	
7,900.00	7,781.77	7,860.15	7,781.77	23.15	19.92	70.40	594.41	-101.73	700.26	659.98	40.28	17.384	
8,000.00	7,881.77	7,960.15	7,881.77	23.31	20.11	70.40	594.41	-101.73	700.26	659.61	40.65	17.227	
8,100.00	7,981.77	8,060.15	7,981.77	23.48	20.30	70.40	594.41	-101.73	700.26	659.24	41.02	17.072	
8,200.00	8,081.77	8,160.15	8,081.77	23.64	20.49	70.40	594.41	-101.73	700.26	658.87	41.39	16.919	
8,300.00	8,181.77	8,260.15	8,181.77	23.81	20.68	70.40	594.41	-101.73	700.26	658.50	41.76	16.768	
8,400.00	8,281.77	8,360.15	8,281.77	23.97	20.87	70.40	594.41	-101.73	700.26	658.13	42.14	16.619	
8,500.00	8,381.77	8,460.15	8,381.77	24.14	21.06	70.40	594.41	-101.73	700.26	657.75	42.51	16.472	
8,544.92	8,426.68	8,505.07	8,426.68	24.21	21.15	70.40	594.41	-101.73	700.26	657.58	42.68	16.407	
8,575.23	8,457.00	8,522.38	8,444.00	24.26	21.18	70.40	594.41	-101.73	700.38	657.61	42.77	16.376	

Anadarko Petroleum Corporation

Weatherford International Ltd.

Anticollision Report

Weatherford

Company:	ANADARKO PETROLEUM CORP.	**Local Co-ordinate Reference:**	Well BONANZA 1023-5M3BS
Project:	UINTAH COUNTY, UTAH (nad 27)	**TVD Reference:**	WELL @ 5309.00ft (Original Well Elev)
Reference Site:	Bonanza 1023-5M PAD	**MD Reference:**	WELL @ 5309.00ft (Original Well Elev)
Site Error:	0.00ft	**North Reference:**	True
Reference Well:	BONANZA 1023-5M3BS	**Survey Calculation Method:**	Minimum Curvature
Well Error:	0.00ft	**Output errors are at**	2.00 sigma
Reference Wellbore	BONANZA 1023-5M3BS	**Database:**	EDM 2003.21 Single User Db
Reference Design:	PLAN #1 4-27-10 RHS	**Offset TVD Reference:**	Offset Datum

Offset Design Bonanza 1023-5M PAD - BONANZA 1023-5M3CS - BONANZA 1023-5M3CS - PLAN #1 4-27-10 RHS — **Offset Site Error:** 0.00 ft

Survey Program: 0-MWD — **Offset Well Error:** 0.00 ft

Reference Measured Depth (ft)	Reference Vertical Depth (ft)	Offset Measured Depth (ft)	Offset Vertical Depth (ft)	Semi Major Axis Reference (ft)	Semi Major Axis Offset (ft)	Highside Toolface (°)	Offset Wellbore Centre +N/-S (ft)	Offset Wellbore Centre +E/-W (ft)	Distance Between Centres (ft)	Distance Between Ellipses (ft)	Minimum Separation (ft)	Separation Factor	Warning
0.00	0.00	0.00	0.00	0.00	0.00	-104.98	-2.55	-9.53	9.86				
100.00	100.00	100.00	100.00	0.10	0.10	-104.98	-2.55	-9.53	9.86	9.67	0.19	51.027	
200.00	200.00	200.00	200.00	0.32	0.32	-104.98	-2.55	-9.53	9.86	9.22	0.64	15.344	
300.00	300.00	300.00	300.00	0.55	0.55	-104.98	-2.55	-9.53	9.86	8.77	1.09	9.030	CC
400.00	399.98	399.66	399.64	0.77	0.76	-44.36	-2.61	-11.26	10.25	8.73	1.52	6.732	ES
450.00	449.93	449.48	449.41	0.88	0.87	-49.04	-2.69	-13.42	10.81	9.07	1.74	6.227	
500.00	499.86	499.46	499.32	0.99	0.97	-54.03	-2.78	-16.04	11.57	9.61	1.95	5.922	
600.00	599.73	599.43	599.15	1.22	1.20	-62.16	-2.97	-21.27	13.30	10.90	2.40	5.540	
700.00	699.59	699.40	698.99	1.46	1.44	-68.32	-3.15	-26.50	15.24	12.38	2.86	5.326	
800.00	799.45	799.37	798.82	1.69	1.67	-73.05	-3.34	-31.72	17.32	13.98	3.33	5.198	
900.00	899.31	899.34	898.65	1.93	1.91	-76.75	-3.52	-36.95	19.48	15.68	3.81	5.119	
1,000.00	999.18	999.31	998.48	2.17	2.15	-79.70	-3.71	-42.18	21.71	17.43	4.28	5.069	
1,100.00	1,099.04	1,099.28	1,098.32	2.42	2.40	-82.09	-3.89	-47.41	23.99	19.23	4.76	5.036	
1,200.00	1,198.90	1,199.25	1,198.15	2.66	2.64	-84.06	-4.08	-52.64	26.31	21.06	5.25	5.014	
1,300.00	1,298.77	1,299.21	1,297.98	2.90	2.88	-85.72	-4.26	-57.87	28.65	22.92	5.73	4.999	
1,400.00	1,398.63	1,399.18	1,397.81	3.14	3.12	-87.12	-4.45	-63.10	31.01	24.79	6.22	4.989	
1,500.00	1,498.49	1,499.15	1,497.65	3.39	3.37	-88.33	-4.63	-68.33	33.38	26.68	6.70	4.982	
1,600.00	1,598.36	1,599.12	1,597.48	3.63	3.61	-89.37	-4.82	-73.55	35.77	28.58	7.19	4.978	
1,700.00	1,698.22	1,699.09	1,697.31	3.87	3.86	-90.29	-5.00	-78.78	38.17	30.50	7.67	4.975	
1,800.00	1,798.08	1,799.06	1,797.14	4.12	4.10	-91.09	-5.19	-84.01	40.58	32.42	8.16	4.974	
1,900.00	1,897.94	1,899.03	1,896.98	4.36	4.35	-91.81	-5.37	-89.24	42.99	34.35	8.64	4.973	
2,000.00	1,997.81	1,999.00	1,996.81	4.60	4.59	-92.44	-5.56	-94.47	45.41	36.28	9.13	4.973	SF
2,092.32	2,090.00	2,091.29	2,088.97	4.83	4.82	-92.98	-5.73	-99.30	47.65	38.07	9.58	4.974	
2,100.00	2,097.67	2,098.90	2,096.57	4.85	4.84	-93.02	-5.75	-99.71	47.84	38.22	9.62	4.974	
2,200.00	2,197.32	2,197.79	2,195.12	5.11	5.10	-93.78	-6.03	-107.77	51.64	41.50	10.14	5.092	
2,300.00	2,296.40	2,296.50	2,292.94	5.41	5.40	-94.79	-6.50	-120.89	57.84	47.11	10.73	5.389	
2,400.00	2,394.64	2,394.95	2,389.70	5.76	5.74	-95.85	-7.14	-138.99	66.45	55.04	11.41	5.825	
2,500.00	2,491.77	2,493.05	2,485.06	6.15	6.14	-96.81	-7.95	-161.96	77.45	65.27	12.18	6.357	
2,600.00	2,587.52	2,590.75	2,578.73	6.62	6.59	-97.61	-8.93	-189.67	90.80	77.72	13.08	6.944	
2,659.04	2,643.31	2,648.21	2,633.12	6.93	6.90	-98.00	-9.58	-208.19	99.77	86.10	13.67	7.300	
2,700.00	2,681.80	2,688.47	2,670.96	7.15	7.12	-98.31	-10.07	-221.92	106.33	92.22	14.10	7.539	
2,800.00	2,775.76	2,787.16	2,763.70	7.73	7.69	-98.91	-11.26	-255.65	122.37	107.16	15.22	8.042	
2,900.00	2,869.73	2,885.86	2,856.45	8.32	8.29	-99.37	-12.45	-289.39	138.43	122.06	16.37	8.455	
3,000.00	2,963.70	2,984.56	2,949.19	8.94	8.91	-99.73	-13.65	-323.13	154.50	136.93	17.57	8.795	
3,100.00	3,057.67	3,083.26	3,041.94	9.57	9.53	-100.03	-14.84	-356.86	170.57	151.78	18.79	9.078	
3,200.00	3,151.64	3,181.95	3,134.68	10.21	10.18	-100.27	-16.03	-390.60	186.64	166.60	20.03	9.316	
3,300.00	3,245.61	3,280.65	3,227.43	10.86	10.83	-100.48	-17.23	-424.33	202.71	181.41	21.30	9.517	
3,400.00	3,339.57	3,379.35	3,320.17	11.52	11.49	-100.65	-18.42	-458.07	218.79	196.21	22.58	9.689	
3,500.00	3,433.54	3,478.04	3,412.92	12.19	12.15	-100.80	-19.61	-491.80	234.87	211.00	23.88	9.837	
3,600.00	3,527.51	3,576.74	3,505.66	12.86	12.82	-100.94	-20.80	-525.54	250.95	225.77	25.18	9.965	
3,700.00	3,621.48	3,675.44	3,598.41	13.54	13.50	-101.05	-22.00	-559.28	267.04	240.53	26.50	10.076	
3,800.00	3,715.45	3,774.13	3,691.15	14.23	14.18	-101.16	-23.19	-593.01	283.12	255.29	27.83	10.174	
3,900.00	3,809.42	3,872.83	3,783.89	14.91	14.87	-101.25	-24.38	-626.75	299.20	270.04	29.16	10.261	
4,000.00	3,903.38	3,971.53	3,876.64	15.60	15.55	-101.33	-25.58	-660.48	315.29	284.79	30.50	10.338	
4,023.65	3,925.61	3,994.87	3,898.58	15.76	15.72	-101.35	-25.86	-668.46	319.09	288.28	30.82	10.355	
4,100.00	3,997.69	4,070.25	3,969.41	16.22	16.25	-101.47	-26.77	-694.23	331.18	299.39	31.79	10.418	
4,200.00	4,093.07	4,169.01	4,062.21	16.72	16.94	-101.12	-27.96	-727.98	346.42	313.47	32.94	10.515	
4,300.00	4,189.44	4,267.67	4,154.92	17.17	17.63	-100.28	-29.16	-761.71	361.08	327.04	34.04	10.606	
4,400.00	4,286.68	4,368.80	4,250.21	17.57	18.28	-99.05	-30.35	-795.54	375.12	340.08	35.03	10.708	
4,500.00	4,384.68	4,471.88	4,348.44	17.93	18.81	-97.84	-31.45	-826.75	387.83	351.97	35.86	10.815	
4,600.00	4,483.31	4,575.64	4,448.40	18.25	19.28	-96.67	-32.44	-854.57	399.11	362.55	36.56	10.916	
4,700.00	4,582.46	4,680.04	4,549.91	18.51	19.70	-95.53	-33.30	-878.90	408.95	371.78	37.17	11.003	

CC - Min centre to center distance or covergent point, SF - min separation factor, ES - min ellipse separation

Weatherford International Ltd.

Anticollision Report

Company:	ANADARKO PETROLEUM CORP.	**Local Co-ordinate Reference:**	Well BONANZA 1023-5M3BS
Project:	UINTAH COUNTY, UTAH (nad 27)	**TVD Reference:**	WELL @ 5309.00ft (Original Well Elev)
Reference Site:	Bonanza 1023-5M PAD	**MD Reference:**	WELL @ 5309.00ft (Original Well Elev)
Site Error:	0.00ft	**North Reference:**	True
Reference Well:	BONANZA 1023-5M3BS	**Survey Calculation Method:**	Minimum Curvature
Well Error:	0.00ft	**Output errors are at**	2.00 sigma
Reference Wellbore	BONANZA 1023-5M3BS	**Database:**	EDM 2003.21 Single User Db
Reference Design:	PLAN #1 4-27-10 RHS	**Offset TVD Reference:**	Offset Datum

Offset Design Bonanza 1023-5M PAD - BONANZA 1023-5M3CS - BONANZA 1023-5M3CS - PLAN #1 4-27-10 RHS

Offset Site Error: 0.00 ft

Survey Program: 0-MWD

Offset Well Error: 0.00 ft

Reference Measured Depth (ft)	Reference Vertical Depth (ft)	Offset Measured Depth (ft)	Offset Vertical Depth (ft)	Semi Major Axis Reference (ft)	Semi Major Axis Offset (ft)	Highside Toolface (°)	Offset Wellbore Centre +N/-S (ft)	Offset Wellbore Centre +E/-W (ft)	Distance Between Centres (ft)	Distance Between Ellipses (ft)	Minimum Separation (ft)	Separation Factor	Warning
4,800.00	4,682.00	4,785.05	4,652.85	18.74	20.07	-94.40	-34.03	-899.62	417.30	379.64	37.66	11.079	
4,900.00	4,781.81	4,890.61	4,757.02	18.91	20.39	-93.27	-34.63	-916.64	424.15	386.09	38.06	11.144	
5,000.00	4,881.77	4,996.68	4,862.26	19.05	20.66	-92.12	-35.10	-929.86	429.49	391.13	38.35	11.198	
5,023.73	4,905.50	5,021.93	4,887.37	19.07	20.71	-156.57	-35.19	-932.43	430.53	392.13	38.41	11.210	
5,100.00	4,981.77	5,103.30	4,968.45	19.16	20.88	-155.76	-35.43	-939.22	433.32	394.74	38.57	11.233	
5,200.00	5,081.77	5,210.46	5,075.47	19.28	21.04	-155.12	-35.62	-944.64	435.59	396.79	38.80	11.227	
5,300.00	5,181.77	5,316.77	5,181.77	19.40	21.17	-154.95	-35.68	-946.11	436.20	397.17	39.04	11.174	
5,400.00	5,281.77	5,416.77	5,281.77	19.53	21.28	-154.95	-35.68	-946.11	436.20	396.93	39.28	11.106	
5,500.00	5,381.77	5,516.77	5,381.77	19.65	21.39	-154.95	-35.68	-946.11	436.20	396.68	39.53	11.036	
5,600.00	5,481.77	5,616.77	5,481.77	19.78	21.50	-154.95	-35.68	-946.11	436.20	396.43	39.78	10.966	
5,700.00	5,581.77	5,716.77	5,581.77	19.91	21.62	-154.95	-35.68	-946.11	436.20	396.17	40.03	10.896	
5,800.00	5,681.77	5,816.77	5,681.77	20.05	21.74	-154.95	-35.68	-946.11	436.20	395.91	40.29	10.827	
5,900.00	5,781.77	5,916.77	5,781.77	20.18	21.86	-154.95	-35.68	-946.11	436.20	395.65	40.55	10.757	
6,000.00	5,881.77	6,016.77	5,881.77	20.32	21.98	-154.95	-35.68	-946.11	436.20	395.39	40.82	10.687	
6,100.00	5,981.77	6,116.77	5,981.77	20.45	22.10	-154.95	-35.68	-946.11	436.20	395.12	41.08	10.617	
6,200.00	6,081.77	6,216.77	6,081.77	20.59	22.23	-154.95	-35.68	-946.11	436.20	394.85	41.36	10.547	
6,300.00	6,181.77	6,316.77	6,181.77	20.73	22.36	-154.95	-35.68	-946.11	436.20	394.57	41.63	10.478	
6,400.00	6,281.77	6,416.77	6,281.77	20.87	22.48	-154.95	-35.68	-946.11	436.20	394.30	41.91	10.409	
6,500.00	6,381.77	6,516.77	6,381.77	21.02	22.61	-154.95	-35.68	-946.11	436.20	394.02	42.19	10.339	
6,600.00	6,481.77	6,616.77	6,481.77	21.16	22.74	-154.95	-35.68	-946.11	436.20	393.73	42.47	10.270	
6,700.00	6,581.77	6,716.77	6,581.77	21.31	22.88	-154.95	-35.68	-946.11	436.20	393.45	42.76	10.202	
6,800.00	6,681.77	6,816.77	6,681.77	21.45	23.01	-154.95	-35.68	-946.11	436.20	393.16	43.05	10.133	
6,900.00	6,781.77	6,916.77	6,781.77	21.60	23.14	-154.95	-35.68	-946.11	436.20	392.87	43.34	10.065	
7,000.00	6,881.77	7,016.77	6,881.77	21.75	23.28	-154.95	-35.68	-946.11	436.20	392.57	43.63	9.997	
7,100.00	6,981.77	7,116.77	6,981.77	21.90	23.42	-154.95	-35.68	-946.11	436.20	392.27	43.93	9.930	
7,200.00	7,081.77	7,216.77	7,081.77	22.05	23.56	-154.95	-35.68	-946.11	436.20	391.97	44.23	9.862	
7,300.00	7,181.77	7,316.77	7,181.77	22.21	23.70	-154.95	-35.68	-946.11	436.20	391.67	44.53	9.795	
7,400.00	7,281.77	7,416.77	7,281.77	22.36	23.84	-154.95	-35.68	-946.11	436.20	391.37	44.84	9.729	
7,500.00	7,381.77	7,516.77	7,381.77	22.52	23.98	-154.95	-35.68	-946.11	436.20	391.06	45.14	9.663	
7,600.00	7,481.77	7,616.77	7,481.77	22.68	24.13	-154.95	-35.68	-946.11	436.20	390.75	45.45	9.597	
7,700.00	7,581.77	7,716.77	7,581.77	22.83	24.27	-154.95	-35.68	-946.11	436.20	390.44	45.76	9.532	
7,800.00	7,681.77	7,816.77	7,681.77	22.99	24.42	-154.95	-35.68	-946.11	436.20	390.13	46.08	9.467	
7,900.00	7,781.77	7,916.77	7,781.77	23.15	24.57	-154.95	-35.68	-946.11	436.20	389.81	46.39	9.402	
8,000.00	7,881.77	8,016.77	7,881.77	23.31	24.72	-154.95	-35.68	-946.11	436.20	389.49	46.71	9.338	
8,100.00	7,981.77	8,116.77	7,981.77	23.48	24.87	-154.95	-35.68	-946.11	436.20	389.17	47.03	9.275	
8,200.00	8,081.77	8,216.77	8,081.77	23.64	25.02	-154.95	-35.68	-946.11	436.20	388.85	47.36	9.211	
8,300.00	8,181.77	8,316.77	8,181.77	23.81	25.17	-154.95	-35.68	-946.11	436.20	388.52	47.68	9.149	
8,400.00	8,281.77	8,416.77	8,281.77	23.97	25.32	-154.95	-35.68	-946.11	436.20	388.20	48.01	9.086	
8,500.00	8,381.77	8,516.77	8,381.77	24.14	25.48	-154.95	-35.68	-946.11	436.20	387.87	48.34	9.025	
8,547.98	8,429.75	8,564.75	8,429.75	24.22	25.55	-154.95	-35.68	-946.11	436.20	387.71	48.49	8.995	
8,575.23	8,457.00	8,586.00	8,451.00	24.26	25.59	-154.95	-35.68	-946.11	436.25	387.67	48.57	8.981	

Anadarko Petroleum Corporation

Weatherford International Ltd.

Anticollision Report

Weatherford

Company:	ANADARKO PETROLEUM CORP.	**Local Co-ordinate Reference:**	Well BONANZA 1023-5M3BS
Project:	UINTAH COUNTY, UTAH (nad 27)	**TVD Reference:**	WELL @ 5309.00ft (Original Well Elev)
Reference Site:	Bonanza 1023-5M PAD	**MD Reference:**	WELL @ 5309.00ft (Original Well Elev)
Site Error:	0.00ft	**North Reference:**	True
Reference Well:	BONANZA 1023-5M3BS	**Survey Calculation Method:**	Minimum Curvature
Well Error:	0.00ft	**Output errors are at**	2.00 sigma
Reference Wellbore	BONANZA 1023-5M3BS	**Database:**	EDM 2003.21 Single User Db
Reference Design:	PLAN #1 4-27-10 RHS	**Offset TVD Reference:**	Offset Datum

Offset Design Bonanza 1023-5M PAD - BONANZA 1023-5N3CS - BONANZA 1023-5N3CS - PLAN #1 4-27-10 RHS — **Offset Site Error:** 0.00 ft

Survey Program: 0-MWD — **Offset Well Error:** 0.00 ft

Reference Measured Depth (ft)	Reference Vertical Depth (ft)	Offset Measured Depth (ft)	Offset Vertical Depth (ft)	Semi Major Axis Reference (ft)	Semi Major Axis Offset (ft)	Highside Toolface (°)	Offset Wellbore Centre +N/-S (ft)	Offset Wellbore Centre +E/-W (ft)	Distance Between Centres (ft)	Distance Between Ellipses (ft)	Minimum Separation (ft)	Separation Factor	Warning
0.00	0.00	0.00	0.00	0.00	0.00	75.23	10.20	38.67	40.00				
100.00	100.00	100.00	100.00	0.10	0.10	75.23	10.20	38.67	40.00	39.80	0.19	206.911	
200.00	200.00	200.00	200.00	0.32	0.32	75.23	10.20	38.67	40.00	39.35	0.64	62.218	
300.00	300.00	300.00	300.00	0.55	0.55	75.23	10.20	38.67	40.00	38.90	1.09	36.614	CC, ES
400.00	399.98	397.82	397.78	0.77	0.76	142.15	10.23	41.18	43.85	42.32	1.53	28.657	
450.00	449.93	446.39	446.25	0.88	0.87	144.38	10.27	44.28	48.74	46.98	1.76	27.707	SF
500.00	499.86	494.62	494.28	0.99	0.98	146.67	10.32	48.58	55.30	53.31	1.98	27.873	
600.00	599.73	589.92	588.81	1.22	1.24	150.11	10.46	60.64	72.32	69.88	2.44	29.611	
700.00	699.59	683.35	680.78	1.46	1.55	152.31	10.66	77.02	94.35	91.45	2.91	32.468	
800.00	799.45	774.52	769.66	1.69	1.93	153.68	10.90	97.32	121.16	117.79	3.37	35.918	
900.00	899.31	866.14	858.01	1.93	2.38	154.55	11.19	121.55	152.11	148.26	3.85	39.496	
1,000.00	999.18	960.97	949.27	2.17	2.88	155.14	11.50	147.30	183.80	179.49	4.31	42.676	
1,100.00	1,099.04	1,055.80	1,040.54	2.42	3.39	155.56	11.80	173.05	215.50	210.74	4.77	45.194	
1,200.00	1,198.90	1,150.63	1,131.81	2.66	3.91	155.88	12.11	198.81	247.22	241.98	5.24	47.212	
1,300.00	1,298.77	1,245.47	1,223.08	2.90	4.44	156.12	12.42	224.56	278.93	273.22	5.71	48.849	
1,400.00	1,398.63	1,340.30	1,314.34	3.14	4.97	156.31	12.73	250.31	310.65	304.46	6.19	50.210	
1,500.00	1,498.49	1,435.13	1,405.61	3.39	5.51	156.47	13.03	276.07	342.37	335.71	6.67	51.355	
1,600.00	1,598.36	1,529.96	1,496.88	3.63	6.04	156.60	13.34	301.82	374.10	366.95	7.15	52.328	
1,700.00	1,698.22	1,624.79	1,588.14	3.87	6.58	156.71	13.65	327.57	405.82	398.19	7.63	53.164	
1,800.00	1,798.08	1,719.62	1,679.41	4.12	7.12	156.80	13.95	353.33	437.55	429.43	8.12	53.889	
1,900.00	1,897.94	1,814.45	1,770.68	4.36	7.66	156.88	14.26	379.08	469.28	460.67	8.61	54.525	
2,000.00	1,997.81	1,909.29	1,861.94	4.60	8.20	156.95	14.57	404.83	501.01	491.91	9.10	55.085	
2,092.32	2,090.00	1,996.83	1,946.20	4.83	8.70	157.01	14.85	428.61	530.30	520.75	9.55	55.547	
2,100.00	2,097.67	2,004.11	1,953.21	4.85	8.74	156.99	14.88	430.59	532.75	523.17	9.58	55.607	
2,200.00	2,197.32	2,098.00	2,043.57	5.11	9.28	156.73	15.18	456.08	567.10	557.09	10.01	56.660	
2,300.00	2,296.40	2,203.33	2,145.14	5.41	9.83	156.67	15.51	483.93	605.29	594.86	10.43	58.037	
2,400.00	2,394.64	2,316.50	2,255.18	5.76	10.28	156.83	15.83	510.37	645.00	634.19	10.81	59.663	
2,500.00	2,491.77	2,430.52	2,366.89	6.15	10.68	157.15	16.10	533.14	686.01	674.85	11.17	61.441	
2,600.00	2,587.52	2,545.39	2,480.17	6.62	11.04	157.61	16.33	552.14	728.35	716.86	11.50	63.357	
2,659.04	2,643.31	2,613.61	2,547.74	6.93	11.23	157.93	16.44	561.54	753.98	742.30	11.68	64.551	
2,700.00	2,681.80	2,661.37	2,595.16	7.15	11.35	158.39	16.51	567.28	771.67	759.79	11.88	64.929	
2,800.00	2,775.76	2,780.67	2,713.91	7.73	11.62	159.46	16.64	578.59	812.68	800.29	12.39	65.582	
2,900.00	2,869.73	2,903.69	2,836.72	8.32	11.83	160.46	16.73	585.72	850.47	837.56	12.90	65.910	
3,000.00	2,963.70	3,030.23	2,963.23	8.94	11.99	161.43	16.76	588.23	884.87	871.46	13.41	65.970	
3,100.00	3,057.67	3,124.67	3,057.67	9.57	12.09	162.11	16.76	588.23	917.55	903.66	13.89	66.064	
3,200.00	3,151.64	3,218.64	3,151.64	10.21	12.20	162.74	16.76	588.23	950.33	935.96	14.37	66.130	
3,300.00	3,245.61	3,312.61	3,245.61	10.86	12.31	163.33	16.76	588.23	983.22	968.36	14.86	66.182	
3,400.00	3,339.57	3,406.58	3,339.57	11.52	12.43	163.88	16.76	588.23	1,016.18	1,000.84	15.34	66.224	
3,500.00	3,433.54	3,500.55	3,433.54	12.19	12.55	164.40	16.76	588.23	1,049.23	1,033.40	15.84	66.258	
3,600.00	3,527.51	3,594.52	3,527.51	12.86	12.66	164.88	16.76	588.23	1,082.35	1,066.02	16.33	66.286	
3,700.00	3,621.48	3,688.48	3,621.48	13.54	12.79	165.34	16.76	588.23	1,115.54	1,098.71	16.82	66.309	
3,800.00	3,715.45	3,782.45	3,715.45	14.23	12.91	165.77	16.76	588.23	1,148.78	1,131.46	17.32	66.328	
3,900.00	3,809.42	3,876.42	3,809.42	14.91	13.04	166.18	16.76	588.23	1,182.08	1,164.26	17.82	66.344	
4,000.00	3,903.38	3,970.39	3,903.38	15.60	13.16	166.56	16.76	588.23	1,215.43	1,197.11	18.32	66.358	
4,023.65	3,925.61	3,992.61	3,925.61	15.76	13.19	166.65	16.76	588.23	1,223.32	1,204.89	18.43	66.361	
4,100.00	3,997.69	4,064.70	3,997.69	16.22	13.29	167.03	16.76	588.23	1,247.89	1,228.96	18.92	65.944	
4,200.00	4,093.07	4,160.08	4,093.07	16.72	13.43	167.47	16.76	588.23	1,277.24	1,257.72	19.52	65.425	
4,300.00	4,189.44	4,256.45	4,189.44	17.17	13.57	167.83	16.76	588.23	1,303.34	1,283.25	20.10	64.856	
4,400.00	4,286.68	4,353.69	4,286.68	17.57	13.71	168.14	16.76	588.23	1,326.16	1,305.52	20.64	64.245	
4,500.00	4,384.68	4,451.69	4,384.68	17.93	13.85	168.40	16.76	588.23	1,345.65	1,324.49	21.16	63.594	
4,600.00	4,483.31	4,550.32	4,483.31	18.25	14.00	168.60	16.76	588.23	1,361.79	1,340.15	21.65	62.909	
4,700.00	4,582.46	4,649.46	4,582.46	18.51	14.15	168.76	16.76	588.23	1,374.55	1,352.45	22.10	62.190	

CC - Min centre to center distance or covergent point, SF - min separation factor, ES - min ellipse separation

Weatherford International Ltd.

Anticollision Report

Company:	ANADARKO PETROLEUM CORP.	**Local Co-ordinate Reference:**	Well BONANZA 1023-5M3BS
Project:	UINTAH COUNTY, UTAH (nad 27)	**TVD Reference:**	WELL @ 5309.00ft (Original Well Elev)
Reference Site:	Bonanza 1023-5M PAD	**MD Reference:**	WELL @ 5309.00ft (Original Well Elev)
Site Error:	0.00ft	**North Reference:**	True
Reference Well:	BONANZA 1023-5M3BS	**Survey Calculation Method:**	Minimum Curvature
Well Error:	0.00ft	**Output errors are at**	2.00 sigma
Reference Wellbore	BONANZA 1023-5M3BS	**Database:**	EDM 2003.21 Single User Db
Reference Design:	PLAN #1 4-27-10 RHS	**Offset TVD Reference:**	Offset Datum

Offset Design Bonanza 1023-5M PAD - BONANZA 1023-5N3CS - BONANZA 1023-5N3CS - PLAN #1 4-27-10 RHS

Offset Site Error: 0.00 ft

Survey Program: 0-MWD

Offset Well Error: 0.00 ft

Reference Measured Depth (ft)	Reference Vertical Depth (ft)	Offset Measured Depth (ft)	Offset Vertical Depth (ft)	Semi Major Axis Reference (ft)	Semi Major Axis Offset (ft)	Highside Toolface (°)	Offset Wellbore Centre +N/-S (ft)	Offset Wellbore Centre +E/-W (ft)	Distance Between Centres (ft)	Distance Between Ellipses (ft)	Minimum Separation (ft)	Separation Factor	Warning
4,800.00	4,682.00	4,749.00	4,682.00	18.74	14.30	168.87	16.76	588.23	1,383.91	1,361.39	22.53	61.438	
4,900.00	4,781.81	4,848.81	4,781.81	18.91	14.46	168.94	16.76	588.23	1,389.86	1,366.95	22.91	60.653	
5,000.00	4,881.77	4,948.77	4,881.77	19.05	14.61	168.97	16.76	588.23	1,392.39	1,369.12	23.27	59.835	
5,023.73	4,905.50	4,972.51	4,905.50	19.07	14.65	104.25	16.76	588.23	1,392.48	1,369.13	23.35	59.634	
5,100.00	4,981.77	5,048.77	4,981.77	19.16	14.77	104.25	16.76	588.23	1,392.48	1,368.85	23.63	58.917	
5,200.00	5,081.77	5,148.77	5,081.77	19.28	14.93	104.25	16.76	588.23	1,392.48	1,368.47	24.02	57.982	
5,300.00	5,181.77	5,248.77	5,181.77	19.40	15.09	104.25	16.76	588.23	1,392.48	1,368.08	24.40	57.070	
5,400.00	5,281.77	5,348.77	5,281.77	19.53	15.26	104.25	16.76	588.23	1,392.48	1,367.70	24.79	56.182	
5,500.00	5,381.77	5,448.77	5,381.77	19.65	15.42	104.25	16.76	588.23	1,392.48	1,367.31	25.17	55.316	
5,600.00	5,481.77	5,548.77	5,481.77	19.78	15.59	104.25	16.76	588.23	1,392.48	1,366.92	25.56	54.472	
5,700.00	5,581.77	5,648.77	5,581.77	19.91	15.76	104.25	16.76	588.23	1,392.48	1,366.53	25.95	53.650	
5,800.00	5,681.77	5,748.77	5,681.77	20.05	15.92	104.25	16.76	588.23	1,392.48	1,366.13	26.35	52.849	
5,900.00	5,781.77	5,848.77	5,781.77	20.18	16.10	104.25	16.76	588.23	1,392.48	1,365.74	26.74	52.067	
6,000.00	5,881.77	5,948.77	5,881.77	20.32	16.27	104.25	16.76	588.23	1,392.48	1,365.34	27.14	51.306	
6,100.00	5,981.77	6,048.77	5,981.77	20.45	16.44	104.25	16.76	588.23	1,392.48	1,364.94	27.54	50.563	
6,200.00	6,081.77	6,148.77	6,081.77	20.59	16.62	104.25	16.76	588.23	1,392.48	1,364.54	27.94	49.839	
6,300.00	6,181.77	6,248.77	6,181.77	20.73	16.79	104.25	16.76	588.23	1,392.48	1,364.14	28.34	49.133	
6,400.00	6,281.77	6,348.77	6,281.77	20.87	16.97	104.25	16.76	588.23	1,392.48	1,363.74	28.74	48.444	
6,500.00	6,381.77	6,448.77	6,381.77	21.02	17.15	104.25	16.76	588.23	1,392.48	1,363.33	29.15	47.772	
6,600.00	6,481.77	6,548.77	6,481.77	21.16	17.33	104.25	16.76	588.23	1,392.48	1,362.93	29.55	47.116	
6,700.00	6,581.77	6,648.77	6,581.77	21.31	17.51	104.25	16.76	588.23	1,392.48	1,362.52	29.96	46.477	
6,800.00	6,681.77	6,748.77	6,681.77	21.45	17.69	104.25	16.76	588.23	1,392.48	1,362.11	30.37	45.852	
6,900.00	6,781.77	6,848.77	6,781.77	21.60	17.87	104.25	16.76	588.23	1,392.48	1,361.70	30.78	45.243	
7,000.00	6,881.77	6,948.77	6,881.77	21.75	18.05	104.25	16.76	588.23	1,392.48	1,361.29	31.19	44.647	
7,100.00	6,981.77	7,048.77	6,981.77	21.90	18.24	104.25	16.76	588.23	1,392.48	1,360.88	31.60	44.066	
7,200.00	7,081.77	7,148.77	7,081.77	22.05	18.42	104.25	16.76	588.23	1,392.48	1,360.47	32.01	43.499	
7,300.00	7,181.77	7,248.77	7,181.77	22.21	18.61	104.25	16.76	588.23	1,392.48	1,360.06	32.43	42.944	
7,400.00	7,281.77	7,348.77	7,281.77	22.36	18.79	104.25	16.76	588.23	1,392.48	1,359.64	32.84	42.402	
7,500.00	7,381.77	7,448.77	7,381.77	22.52	18.98	104.25	16.76	588.23	1,392.48	1,359.23	33.25	41.873	
7,600.00	7,481.77	7,548.77	7,481.77	22.68	19.17	104.25	16.76	588.23	1,392.48	1,358.81	33.67	41.356	
7,700.00	7,581.77	7,648.77	7,581.77	22.83	19.36	104.25	16.76	588.23	1,392.48	1,358.40	34.09	40.850	
7,800.00	7,681.77	7,748.77	7,681.77	22.99	19.55	104.25	16.76	588.23	1,392.48	1,357.98	34.51	40.355	
7,900.00	7,781.77	7,848.77	7,781.77	23.15	19.74	104.25	16.76	588.23	1,392.48	1,357.56	34.92	39.872	
8,000.00	7,881.77	7,948.77	7,881.77	23.31	19.93	104.25	16.76	588.23	1,392.48	1,357.14	35.34	39.399	
8,100.00	7,981.77	8,048.77	7,981.77	23.48	20.12	104.25	16.76	588.23	1,392.48	1,356.72	35.76	38.936	
8,200.00	8,081.77	8,148.77	8,081.77	23.64	20.31	104.25	16.76	588.23	1,392.48	1,356.30	36.18	38.483	
8,300.00	8,181.77	8,248.77	8,181.77	23.81	20.51	104.25	16.76	588.23	1,392.48	1,355.88	36.61	38.040	
8,400.00	8,281.77	8,348.77	8,281.77	23.97	20.70	104.25	16.76	588.23	1,392.48	1,355.46	37.03	37.607	
8,500.00	8,381.77	8,448.77	8,381.77	24.14	20.90	104.25	16.76	588.23	1,392.48	1,355.03	37.45	37.182	
8,575.23	8,457.00	8,471.01	8,404.00	24.26	20.94	104.25	16.76	588.23	1,393.49	1,355.84	37.65	37.008	

Anadarko Petroleum Corporation

Weatherford International Ltd.

Anticollision Report

Weatherford

Company:	ANADARKO PETROLEUM CORP.	**Local Co-ordinate Reference:**	Well BONANZA 1023-5M3BS
Project:	UINTAH COUNTY, UTAH (nad 27)	**TVD Reference:**	WELL @ 5309.00ft (Original Well Elev)
Reference Site:	Bonanza 1023-5M PAD	**MD Reference:**	WELL @ 5309.00ft (Original Well Elev)
Site Error:	0.00ft	**North Reference:**	True
Reference Well:	BONANZA 1023-5M3BS	**Survey Calculation Method:**	Minimum Curvature
Well Error:	0.00ft	**Output errors are at**	2.00 sigma
Reference Wellbore	BONANZA 1023-5M3BS	**Database:**	EDM 2003.21 Single User Db
Reference Design:	PLAN #1 4-27-10 RHS	**Offset TVD Reference:**	Offset Datum

Offset Design Bonanza 1023-5M PAD - BONANZA 1023-5N4AS - BONANZA 1023-5N4AS - PLAN #1 4-27-10 RHS — **Offset Site Error:** 0.00 ft

Survey Program: 0-MWD — **Offset Well Error:** 0.00 ft

Reference Measured Depth (ft)	Reference Vertical Depth (ft)	Offset Measured Depth (ft)	Offset Vertical Depth (ft)	Semi Major Axis Reference (ft)	Semi Major Axis Offset (ft)	Highside Toolface (°)	Offset Wellbore Centre +N/-S (ft)	Offset Wellbore Centre +E/-W (ft)	Distance Between Centres (ft)	Distance Between Ellipses (ft)	Minimum Separation (ft)	Separation Factor	Warning
0.00	0.00	0.00	0.00	0.00	0.00	75.23	15.30	58.01	59.99				
100.00	100.00	100.00	100.00	0.10	0.10	75.23	15.30	58.01	59.99	59.80	0.19	310.367	
200.00	200.00	200.00	200.00	0.32	0.32	75.23	15.30	58.01	59.99	59.35	0.64	93.327	
300.00	300.00	300.00	300.00	0.55	0.55	75.23	15.30	58.01	59.99	58.90	1.09	54.921	CC, ES
400.00	399.98	396.79	396.75	0.77	0.76	140.82	15.99	60.36	63.87	62.34	1.53	41.719	
450.00	449.93	444.87	444.73	0.88	0.87	141.75	16.85	63.28	68.73	66.97	1.76	39.054	
500.00	499.86	492.64	492.32	0.99	0.98	142.74	18.05	67.32	75.19	73.20	1.99	37.876	
600.00	599.73	587.13	586.05	1.22	1.24	144.04	21.40	78.67	91.83	89.39	2.44	37.583	SF
700.00	699.59	679.85	677.36	1.46	1.55	144.65	25.97	94.12	113.29	110.38	2.91	38.953	
800.00	799.45	770.45	765.71	1.69	1.92	144.84	31.64	113.30	139.38	136.00	3.38	41.266	
900.00	899.31	858.59	850.66	1.93	2.35	144.79	38.29	135.79	169.93	166.08	3.85	44.130	
1,000.00	999.18	944.02	931.89	2.17	2.83	144.62	45.79	161.16	204.75	200.42	4.33	47.294	
1,100.00	1,099.04	1,034.11	1,016.59	2.42	3.41	144.40	54.49	190.59	242.58	237.76	4.82	50.373	
1,200.00	1,198.90	1,126.62	1,103.52	2.66	4.03	144.23	63.45	220.93	280.56	275.27	5.29	53.035	
1,300.00	1,298.77	1,219.12	1,190.44	2.90	4.66	144.11	72.42	251.27	318.54	312.76	5.77	55.181	
1,400.00	1,398.63	1,311.63	1,277.37	3.14	5.30	144.01	81.39	281.61	356.52	350.26	6.26	56.930	
1,500.00	1,498.49	1,404.13	1,364.30	3.39	5.94	143.93	90.36	311.95	394.50	387.74	6.76	58.393	
1,600.00	1,598.36	1,496.64	1,451.22	3.63	6.58	143.86	99.33	342.29	432.48	425.23	7.25	59.623	
1,700.00	1,698.22	1,589.14	1,538.15	3.87	7.23	143.81	108.30	372.63	470.47	462.71	7.75	60.671	
1,800.00	1,798.08	1,681.65	1,625.07	4.12	7.88	143.76	117.26	402.97	508.45	500.19	8.26	61.574	
1,900.00	1,897.94	1,774.15	1,712.00	4.36	8.53	143.72	126.23	433.31	546.43	537.67	8.76	62.360	
2,000.00	1,997.81	1,866.66	1,798.93	4.60	9.18	143.68	135.20	463.65	584.42	575.15	9.27	63.048	
2,092.32	2,090.00	1,952.06	1,879.17	4.83	9.79	143.65	143.48	491.66	619.48	609.74	9.74	63.612	
2,100.00	2,097.67	1,959.16	1,885.85	4.85	9.84	143.59	144.17	493.99	622.41	612.64	9.77	63.688	
2,200.00	2,197.32	2,050.69	1,971.86	5.11	10.48	142.95	153.04	524.02	662.63	652.41	10.21	64.874	
2,300.00	2,296.40	2,140.36	2,056.13	5.41	11.12	142.46	161.74	553.43	706.64	696.00	10.64	66.389	
2,400.00	2,394.64	2,227.93	2,138.41	5.76	11.74	142.09	170.23	582.15	754.40	743.33	11.06	68.182	
2,500.00	2,491.77	2,313.15	2,218.49	6.15	12.34	141.79	178.49	610.10	805.83	794.35	11.48	70.193	
2,600.00	2,587.52	2,395.78	2,296.14	6.62	12.93	141.52	186.50	637.20	860.89	848.99	11.90	72.348	
2,659.04	2,643.31	2,443.26	2,340.76	6.93	13.26	141.36	191.10	652.78	895.07	882.92	12.15	73.653	
2,700.00	2,681.80	2,475.86	2,371.39	7.15	13.50	141.79	194.26	663.47	919.23	906.85	12.38	74.236	
2,800.00	2,775.76	2,555.43	2,446.16	7.73	14.06	142.77	201.98	689.57	978.35	965.39	12.96	75.508	
2,900.00	2,869.73	2,635.00	2,520.93	8.32	14.63	143.63	209.69	715.67	1,037.63	1,024.09	13.55	76.602	
3,000.00	2,963.70	2,714.58	2,595.71	8.94	15.19	144.40	217.41	741.76	1,097.06	1,082.91	14.15	77.551	
3,100.00	3,057.67	2,794.15	2,670.48	9.57	15.75	145.10	225.12	767.86	1,156.60	1,141.85	14.76	78.382	
3,200.00	3,151.64	2,873.72	2,745.25	10.21	16.32	145.72	232.84	793.96	1,216.25	1,200.87	15.37	79.114	
3,300.00	3,245.61	2,953.29	2,820.03	10.86	16.89	146.29	240.55	820.06	1,275.98	1,259.98	16.00	79.765	
3,400.00	3,339.57	3,032.86	2,894.80	11.52	17.45	146.81	248.26	846.16	1,335.79	1,319.16	16.63	80.348	
3,500.00	3,433.54	3,112.44	2,969.57	12.19	18.02	147.29	255.98	872.26	1,395.66	1,378.40	17.26	80.872	
3,600.00	3,527.51	3,192.01	3,044.35	12.86	18.58	147.73	263.69	898.36	1,455.59	1,437.69	17.89	81.345	
3,700.00	3,621.48	3,271.58	3,119.12	13.54	19.15	148.13	271.41	924.46	1,515.57	1,497.03	18.53	81.776	
3,800.00	3,715.45	3,351.15	3,193.90	14.23	19.71	148.50	279.12	950.56	1,575.59	1,556.42	19.18	82.169	
3,900.00	3,809.42	3,430.73	3,268.67	14.91	20.28	148.85	286.84	976.66	1,635.66	1,615.84	19.82	82.530	
4,000.00	3,903.38	3,510.30	3,343.44	15.60	20.84	149.17	294.55	1,002.75	1,695.76	1,675.29	20.47	82.861	
4,023.65	3,925.61	3,529.12	3,361.13	15.76	20.98	149.24	296.38	1,008.93	1,709.98	1,689.36	20.62	82.936	
4,100.00	3,997.69	3,590.43	3,418.75	16.22	21.41	150.02	302.32	1,029.04	1,755.19	1,733.95	21.24	82.646	
4,200.00	4,093.07	3,672.40	3,495.77	16.72	22.00	150.90	310.27	1,055.92	1,812.24	1,790.23	22.02	82.314	
4,300.00	4,189.44	3,756.15	3,574.47	17.17	22.59	151.64	318.39	1,083.39	1,866.78	1,844.00	22.78	81.932	
4,400.00	4,286.68	3,841.58	3,654.75	17.57	23.20	152.27	326.67	1,111.41	1,918.72	1,895.19	23.54	81.526	
4,500.00	4,384.68	3,928.59	3,736.51	17.93	23.82	152.79	335.10	1,139.95	1,968.00	1,943.74	24.26	81.111	
4,600.00	4,483.31	4,017.07	3,819.65	18.25	24.45	153.22	343.68	1,168.97	2,014.55	1,989.59	24.96	80.700	
4,700.00	4,582.46	4,106.92	3,904.08	18.51	25.09	153.55	352.39	1,198.44	2,058.33	2,032.70	25.63	80.301	

CC - Min centre to center distance or covergent point, SF - min separation factor, ES - min ellipse separation

Anadarko Petroleum Corporation

Weatherford International Ltd.

Anticollision Report

Weatherford

Company:	ANADARKO PETROLEUM CORP.	**Local Co-ordinate Reference:**	Well BONANZA 1023-5M3BS
Project:	UINTAH COUNTY, UTAH (nad 27)	**TVD Reference:**	WELL @ 5309.00ft (Original Well Elev)
Reference Site:	Bonanza 1023-5M PAD	**MD Reference:**	WELL @ 5309.00ft (Original Well Elev)
Site Error:	0.00ft	**North Reference:**	True
Reference Well:	BONANZA 1023-5M3BS	**Survey Calculation Method:**	Minimum Curvature
Well Error:	0.00ft	**Output errors are at**	2.00 sigma
Reference Wellbore	BONANZA 1023-5M3BS	**Database:**	EDM 2003.21 Single User Db
Reference Design:	PLAN #1 4-27-10 RHS	**Offset TVD Reference:**	Offset Datum

Offset Design Bonanza 1023-5M PAD - BONANZA 1023-5N4AS - BONANZA 1023-5N4AS - PLAN #1 4-27-10 RHS

Offset Site Error: 0.00 ft

Survey Program: 0-MWD

Offset Well Error: 0.00 ft

Reference Measured Depth (ft)	Reference Vertical Depth (ft)	Offset Measured Depth (ft)	Offset Vertical Depth (ft)	Semi Major Axis Reference (ft)	Semi Major Axis Offset (ft)	Highside Toolface (°)	Offset Wellbore Centre +N/-S (ft)	Offset Wellbore Centre +E/-W (ft)	Distance Between Centres (ft)	Distance Between Ellipses (ft)	Minimum Separation (ft)	Separation Factor	Warning
4,800.00	4,682.00	4,198.02	3,989.69	18.74	25.74	153.81	361.23	1,228.32	2,099.28	2,073.02	26.27	79.918	
4,900.00	4,781.81	4,290.27	4,076.37	18.91	26.39	153.99	370.17	1,258.58	2,137.38	2,110.51	26.87	79.556	
5,000.00	4,881.77	4,419.71	4,198.15	19.05	27.25	154.01	382.60	1,300.65	2,172.46	2,144.93	27.53	78.912	
5,023.73	4,905.50	4,504.33	4,278.55	19.07	27.70	89.16	390.08	1,325.95	2,179.70	2,151.87	27.82	78.345	
5,100.00	4,981.77	4,786.74	4,551.86	19.16	28.90	88.65	410.11	1,393.71	2,198.17	2,169.52	28.65	76.731	
5,200.00	5,081.77	5,174.27	4,935.52	19.28	29.89	88.30	425.00	1,444.09	2,211.32	2,181.76	29.56	74.811	
5,300.00	5,181.77	5,420.68	5,181.77	19.40	30.16	88.25	426.91	1,450.52	2,212.96	2,182.89	30.07	73.588	
5,400.00	5,281.77	5,520.68	5,281.77	19.53	30.24	88.25	426.91	1,450.52	2,212.96	2,182.58	30.38	72.851	
5,500.00	5,381.77	5,620.68	5,381.77	19.65	30.33	88.25	426.91	1,450.52	2,212.96	2,182.28	30.68	72.121	
5,600.00	5,481.77	5,720.68	5,481.77	19.78	30.41	88.25	426.91	1,450.52	2,212.96	2,181.96	31.00	71.397	
5,700.00	5,581.77	5,820.68	5,581.77	19.91	30.50	88.25	426.91	1,450.52	2,212.96	2,181.65	31.31	70.680	
5,800.00	5,681.77	5,920.68	5,681.77	20.05	30.58	88.25	426.91	1,450.52	2,212.96	2,181.33	31.63	69.971	
5,900.00	5,781.77	6,020.68	5,781.77	20.18	30.67	88.25	426.91	1,450.52	2,212.96	2,181.01	31.95	69.268	
6,000.00	5,881.77	6,120.68	5,881.77	20.32	30.76	88.25	426.91	1,450.52	2,212.96	2,180.69	32.27	68.573	
6,100.00	5,981.77	6,220.68	5,981.77	20.45	30.85	88.25	426.91	1,450.52	2,212.96	2,180.36	32.60	67.886	
6,200.00	6,081.77	6,320.68	6,081.77	20.59	30.95	88.25	426.91	1,450.52	2,212.96	2,180.03	32.93	67.207	
6,300.00	6,181.77	6,420.68	6,181.77	20.73	31.04	88.25	426.91	1,450.52	2,212.96	2,179.70	33.26	66.535	
6,400.00	6,281.77	6,520.68	6,281.77	20.87	31.13	88.25	426.91	1,450.52	2,212.96	2,179.36	33.59	65.872	
6,500.00	6,381.77	6,620.68	6,381.77	21.02	31.23	88.25	426.91	1,450.52	2,212.96	2,179.03	33.93	65.216	
6,600.00	6,481.77	6,720.68	6,481.77	21.16	31.33	88.25	426.91	1,450.52	2,212.96	2,178.69	34.27	64.569	
6,700.00	6,581.77	6,820.68	6,581.77	21.31	31.43	88.25	426.91	1,450.52	2,212.96	2,178.34	34.62	63.930	
6,800.00	6,681.77	6,920.68	6,681.77	21.45	31.53	88.25	426.91	1,450.52	2,212.96	2,178.00	34.96	63.299	
6,900.00	6,781.77	7,020.68	6,781.77	21.60	31.63	88.25	426.91	1,450.52	2,212.96	2,177.65	35.31	62.677	
7,000.00	6,881.77	7,120.68	6,881.77	21.75	31.73	88.25	426.91	1,450.52	2,212.96	2,177.30	35.66	62.062	
7,100.00	6,981.77	7,220.68	6,981.77	21.90	31.84	88.25	426.91	1,450.52	2,212.96	2,176.95	36.01	61.456	
7,200.00	7,081.77	7,320.68	7,081.77	22.05	31.94	88.25	426.91	1,450.52	2,212.96	2,176.60	36.36	60.858	
7,300.00	7,181.77	7,420.68	7,181.77	22.21	32.05	88.25	426.91	1,450.52	2,212.96	2,176.24	36.72	60.268	
7,400.00	7,281.77	7,520.68	7,281.77	22.36	32.16	88.25	426.91	1,450.52	2,212.96	2,175.88	37.08	59.686	
7,500.00	7,381.77	7,620.68	7,381.77	22.52	32.27	88.25	426.91	1,450.52	2,212.96	2,175.52	37.44	59.112	
7,600.00	7,481.77	7,720.68	7,481.77	22.68	32.38	88.25	426.91	1,450.52	2,212.96	2,175.16	37.80	58.546	
7,700.00	7,581.77	7,820.68	7,581.77	22.83	32.49	88.25	426.91	1,450.52	2,212.96	2,174.80	38.16	57.988	
7,800.00	7,681.77	7,920.68	7,681.77	22.99	32.60	88.25	426.91	1,450.52	2,212.96	2,174.43	38.53	57.438	
7,900.00	7,781.77	8,020.68	7,781.77	23.15	32.72	88.25	426.91	1,450.52	2,212.96	2,174.06	38.89	56.896	
8,000.00	7,881.77	8,120.68	7,881.77	23.31	32.83	88.25	426.91	1,450.52	2,212.96	2,173.70	39.26	56.361	
8,100.00	7,981.77	8,220.68	7,981.77	23.48	32.95	88.25	426.91	1,450.52	2,212.96	2,173.33	39.63	55.834	
8,200.00	8,081.77	8,320.68	8,081.77	23.64	33.07	88.25	426.91	1,450.52	2,212.96	2,172.95	40.01	55.315	
8,300.00	8,181.77	8,420.68	8,181.77	23.81	33.18	88.25	426.91	1,450.52	2,212.96	2,172.58	40.38	54.803	
8,400.00	8,281.77	8,520.68	8,281.77	23.97	33.30	88.25	426.91	1,450.52	2,212.96	2,172.20	40.76	54.299	
8,500.00	8,381.77	8,620.68	8,381.77	24.14	33.42	88.25	426.91	1,450.52	2,212.96	2,171.83	41.13	53.801	
8,575.23	8,457.00	8,627.91	8,389.00	24.26	33.43	88.25	426.91	1,450.52	2,214.00	2,172.71	41.29	53.616	

Anadarko Petroleum Corporation

Weatherford International Ltd.

Anticollision Report

Weatherford

Company:	ANADARKO PETROLEUM CORP.	**Local Co-ordinate Reference:**	Well BONANZA 1023-5M3BS
Project:	UINTAH COUNTY, UTAH (nad 27)	**TVD Reference:**	WELL @ 5309.00ft (Original Well Elev)
Reference Site:	Bonanza 1023-5M PAD	**MD Reference:**	WELL @ 5309.00ft (Original Well Elev)
Site Error:	0.00ft	**North Reference:**	True
Reference Well:	BONANZA 1023-5M3BS	**Survey Calculation Method:**	Minimum Curvature
Well Error:	0.00ft	**Output errors are at**	2.00 sigma
Reference Wellbore	BONANZA 1023-5M3BS	**Database:**	EDM 2003.21 Single User Db
Reference Design:	PLAN #1 4-27-10 RHS	**Offset TVD Reference:**	Offset Datum

Offset Design Bonanza 1023-5M PAD - BONANZA 1023-8C2DS - BONANZA 1023-8C2DS - PLAN #1 4-27-10 RHS — **Offset Site Error:** 0.00 ft

Survey Program: 0-MWD — **Offset Well Error:** 0.00 ft

Reference Measured Depth (ft)	Reference Vertical Depth (ft)	Offset Measured Depth (ft)	Offset Vertical Depth (ft)	Semi Major Axis Reference (ft)	Semi Major Axis Offset (ft)	Highside Toolface (°)	Offset Wellbore Centre +N/-S (ft)	Offset Wellbore Centre +E/-W (ft)	Distance Between Centres (ft)	Distance Between Ellipses (ft)	Minimum Separation (ft)	Separation Factor	Warning
0.00	0.00	0.00	0.00	0.00	0.00	75.16	7.65	28.87	29.86				
100.00	100.00	100.00	100.00	0.10	0.10	75.16	7.65	28.87	29.86	29.67	0.19	154.483	
200.00	200.00	200.00	200.00	0.32	0.32	75.16	7.65	28.87	29.86	29.22	0.64	46.453	
300.00	300.00	300.00	300.00	0.55	0.55	75.16	7.65	28.87	29.86	28.77	1.09	27.336	CC, ES
400.00	399.98	399.38	399.36	0.77	0.75	144.55	6.40	30.06	32.14	30.62	1.52	21.176	
450.00	449.93	448.86	448.79	0.88	0.85	149.47	4.85	31.54	35.25	33.52	1.73	20.341	
500.00	499.86	498.58	498.45	0.99	0.95	154.39	2.97	33.33	39.28	37.33	1.95	20.187	SF
600.00	599.73	598.05	597.78	1.22	1.17	161.64	-0.79	36.93	47.97	45.60	2.37	20.202	
700.00	699.59	697.53	697.12	1.46	1.40	166.62	-4.56	40.52	57.20	54.38	2.81	20.351	
800.00	799.45	797.00	796.45	1.69	1.63	170.20	-8.32	44.12	66.73	63.48	3.25	20.525	
900.00	899.31	896.47	895.79	1.93	1.87	172.88	-12.09	47.71	76.45	72.76	3.69	20.693	
1,000.00	999.18	995.94	995.12	2.17	2.10	174.95	-15.85	51.31	86.31	82.17	4.14	20.844	
1,100.00	1,099.04	1,095.41	1,094.45	2.42	2.35	176.59	-19.62	54.90	96.25	91.66	4.59	20.978	
1,200.00	1,198.90	1,194.88	1,193.79	2.66	2.59	177.93	-23.38	58.50	106.25	101.22	5.04	21.094	
1,300.00	1,298.77	1,294.35	1,293.12	2.90	2.83	179.03	-27.15	62.10	116.31	110.82	5.49	21.197	
1,400.00	1,398.63	1,393.82	1,392.46	3.14	3.07	179.96	-30.91	65.69	126.40	120.46	5.94	21.287	
1,500.00	1,498.49	1,493.29	1,491.79	3.39	3.31	-179.25	-34.68	69.29	136.51	130.13	6.39	21.366	
1,600.00	1,598.36	1,592.76	1,591.12	3.63	3.56	-178.57	-38.44	72.88	146.65	139.81	6.84	21.437	
1,700.00	1,698.22	1,692.23	1,690.46	3.87	3.80	-177.97	-42.21	76.48	156.81	149.52	7.29	21.500	
1,800.00	1,798.08	1,791.70	1,789.79	4.12	4.05	-177.45	-45.97	80.07	166.98	159.24	7.75	21.556	
1,900.00	1,897.94	1,891.17	1,889.13	4.36	4.29	-176.99	-49.74	83.67	177.17	168.97	8.20	21.607	
2,000.00	1,997.81	1,990.64	1,988.46	4.60	4.53	-176.58	-53.50	87.26	187.36	178.71	8.65	21.654	
2,092.32	2,090.00	2,079.76	2,077.45	4.83	4.76	-176.23	-57.02	90.62	196.99	187.92	9.07	21.727	
2,100.00	2,097.67	2,086.70	2,084.37	4.85	4.77	-176.19	-57.36	90.95	197.91	188.81	9.10	21.750	
2,200.00	2,197.32	2,175.97	2,173.24	5.11	5.02	-175.62	-63.41	96.72	215.03	205.51	9.52	22.598	
2,300.00	2,296.40	2,262.42	2,258.84	5.41	5.29	-174.91	-72.12	105.04	241.57	231.66	9.92	24.361	
2,400.00	2,394.64	2,345.03	2,340.05	5.76	5.58	-174.17	-83.05	115.48	277.14	266.85	10.29	26.922	
2,500.00	2,491.77	2,422.94	2,415.97	6.15	5.89	-173.46	-95.68	127.53	321.24	310.59	10.64	30.181	
2,600.00	2,587.52	2,500.00	2,490.30	6.62	6.23	-172.76	-110.36	141.55	373.28	362.31	10.97	34.021	
2,659.04	2,643.31	2,535.69	2,524.44	6.93	6.40	-172.41	-117.89	148.75	407.42	396.28	11.14	36.580	
2,700.00	2,681.80	2,563.86	2,551.25	7.15	6.54	-172.26	-124.15	154.73	432.18	420.86	11.32	38.171	
2,800.00	2,775.76	2,643.23	2,626.68	7.73	6.96	-171.91	-142.02	171.78	492.97	481.18	11.79	41.809	
2,900.00	2,869.73	2,722.60	2,702.10	8.32	7.39	-171.64	-159.88	188.84	553.77	541.51	12.26	45.168	
3,000.00	2,963.70	2,801.97	2,777.53	8.94	7.83	-171.42	-177.74	205.90	614.58	601.84	12.74	48.248	
3,100.00	3,057.67	2,881.34	2,852.96	9.57	8.28	-171.24	-195.61	222.96	675.39	662.17	13.23	51.068	
3,200.00	3,151.64	2,960.70	2,928.38	10.21	8.73	-171.09	-213.47	240.01	736.21	722.49	13.72	53.664	
3,300.00	3,245.61	3,040.07	3,003.81	10.86	9.20	-170.96	-231.33	257.07	797.02	782.81	14.22	56.057	
3,400.00	3,339.57	3,119.44	3,079.24	11.52	9.67	-170.85	-249.20	274.13	857.85	843.12	14.72	58.269	
3,500.00	3,433.54	3,198.81	3,154.67	12.19	10.14	-170.75	-267.06	291.19	918.67	903.44	15.23	60.315	
3,600.00	3,527.51	3,278.18	3,230.09	12.86	10.62	-170.67	-284.92	308.24	979.49	963.75	15.75	62.206	
3,700.00	3,621.48	3,357.54	3,305.52	13.54	11.11	-170.60	-302.78	325.30	1,040.32	1,024.05	16.26	63.964	
3,800.00	3,715.45	3,436.91	3,380.95	14.23	11.60	-170.53	-320.65	342.36	1,101.14	1,084.36	16.79	65.599	
3,900.00	3,809.42	3,516.28	3,456.38	14.91	12.09	-170.47	-338.51	359.42	1,161.97	1,144.66	17.31	67.124	
4,000.00	3,903.38	3,595.65	3,531.80	15.60	12.58	-170.42	-356.37	376.47	1,222.79	1,204.96	17.84	68.547	
4,023.65	3,925.61	3,614.42	3,549.64	15.76	12.69	-170.41	-360.60	380.51	1,237.18	1,219.22	17.96	68.869	
4,100.00	3,997.69	3,675.62	3,607.80	16.22	13.08	-170.55	-374.37	393.66	1,282.82	1,264.35	18.47	69.458	
4,200.00	4,093.07	3,757.54	3,685.66	16.72	13.59	-170.70	-392.81	411.27	1,340.14	1,321.05	19.09	70.193	
4,300.00	4,189.44	3,841.38	3,765.33	17.17	14.12	-170.80	-411.68	429.28	1,394.60	1,374.90	19.70	70.781	
4,400.00	4,286.68	3,927.02	3,846.72	17.57	14.66	-170.87	-430.95	447.69	1,446.15	1,425.85	20.30	71.243	
4,500.00	4,384.68	4,014.38	3,929.74	17.93	15.21	-170.91	-450.61	466.46	1,494.72	1,473.84	20.88	71.595	
4,600.00	4,483.31	4,103.33	4,014.27	18.25	15.77	-170.92	-470.63	485.58	1,540.25	1,518.81	21.44	71.853	
4,700.00	4,582.46	4,193.77	4,100.23	18.51	16.35	-170.90	-490.99	505.02	1,582.70	1,560.73	21.97	72.026	

CC - Min centre to center distance or covergent point, SF - min separation factor, ES - min ellipse separation

Weatherford International Ltd.

Anticollision Report

Company:	ANADARKO PETROLEUM CORP.	**Local Co-ordinate Reference:**	Well BONANZA 1023-5M3BS
Project:	UINTAH COUNTY, UTAH (nad 27)	**TVD Reference:**	WELL @ 5309.00ft (Original Well Elev)
Reference Site:	Bonanza 1023-5M PAD	**MD Reference:**	WELL @ 5309.00ft (Original Well Elev)
Site Error:	0.00ft	**North Reference:**	True
Reference Well:	BONANZA 1023-5M3BS	**Survey Calculation Method:**	Minimum Curvature
Well Error:	0.00ft	**Output errors are at**	2.00 sigma
Reference Wellbore	BONANZA 1023-5M3BS	**Database:**	EDM 2003.21 Single User Db
Reference Design:	PLAN #1 4-27-10 RHS	**Offset TVD Reference:**	Offset Datum

Offset Design Bonanza 1023-5M PAD - BONANZA 1023-8C2DS - BONANZA 1023-8C2DS - PLAN #1 4-27-10 RHS

Offset Site Error: 0.00 ft

Survey Program: 0-MWD

Offset Well Error: 0.00 ft

Reference Measured Depth (ft)	Reference Vertical Depth (ft)	Offset Measured Depth (ft)	Offset Vertical Depth (ft)	Semi Major Axis Reference (ft)	Semi Major Axis Offset (ft)	Highside Toolface (°)	Offset Wellbore Centre +N/-S (ft)	Offset Wellbore Centre +E/-W (ft)	Distance Between Centres (ft)	Distance Between Ellipses (ft)	Minimum Separation (ft)	Separation Factor	Warning
4,800.00	4,682.00	4,285.60	4,187.49	18.74	16.93	-170.86	-511.66	524.75	1,622.02	1,599.53	22.49	72.127	
4,900.00	4,781.81	4,378.69	4,275.97	18.91	17.53	-170.79	-532.61	544.76	1,658.16	1,635.18	22.98	72.163	
5,000.00	4,881.77	4,472.95	4,365.54	19.05	18.13	-170.70	-553.82	565.02	1,691.08	1,667.64	23.44	72.141	
5,023.73	4,905.50	4,495.47	4,386.94	19.07	18.28	124.60	-558.89	569.86	1,698.42	1,674.87	23.55	72.126	
5,100.00	4,981.77	4,567.95	4,455.83	19.16	18.74	124.76	-575.21	585.44	1,721.71	1,697.81	23.90	72.029	
5,200.00	5,081.77	4,722.58	4,603.29	19.28	19.61	125.08	-608.82	617.54	1,751.59	1,727.07	24.52	71.435	
5,300.00	5,181.77	4,968.44	4,842.10	19.40	20.57	125.45	-650.89	657.70	1,774.86	1,749.60	25.27	70.239	
5,400.00	5,281.77	5,222.96	5,093.61	19.53	21.29	125.68	-678.67	684.24	1,789.72	1,763.75	25.97	68.906	
5,500.00	5,381.77	5,482.42	5,352.49	19.65	21.73	125.78	-690.27	695.31	1,795.80	1,769.19	26.61	67.486	
5,600.00	5,481.77	5,611.70	5,481.77	19.78	21.87	125.78	-690.56	695.58	1,795.95	1,768.94	27.01	66.489	
5,700.00	5,581.77	5,711.70	5,581.77	19.91	21.98	125.78	-690.56	695.58	1,795.95	1,768.60	27.36	65.650	
5,800.00	5,681.77	5,811.70	5,681.77	20.05	22.08	125.78	-690.56	695.58	1,795.95	1,768.25	27.71	64.824	
5,900.00	5,781.77	5,911.70	5,781.77	20.18	22.19	125.78	-690.56	695.58	1,795.95	1,767.90	28.06	64.012	
6,000.00	5,881.77	6,011.70	5,881.77	20.32	22.30	125.78	-690.56	695.58	1,795.95	1,767.54	28.41	63.215	
6,100.00	5,981.77	6,111.70	5,981.77	20.45	22.41	125.78	-690.56	695.58	1,795.95	1,767.19	28.77	62.431	
6,200.00	6,081.77	6,211.70	6,081.77	20.59	22.52	125.78	-690.56	695.58	1,795.95	1,766.83	29.13	61.661	
6,300.00	6,181.77	6,311.70	6,181.77	20.73	22.64	125.78	-690.56	695.58	1,795.95	1,766.47	29.49	60.905	
6,400.00	6,281.77	6,411.70	6,281.77	20.87	22.75	125.78	-690.56	695.58	1,795.95	1,766.10	29.85	60.162	
6,500.00	6,381.77	6,511.70	6,381.77	21.02	22.87	125.78	-690.56	695.58	1,795.95	1,765.74	30.22	59.433	
6,600.00	6,481.77	6,611.70	6,481.77	21.16	22.99	125.78	-690.56	695.58	1,795.95	1,765.37	30.59	58.717	
6,700.00	6,581.77	6,711.70	6,581.77	21.31	23.11	125.78	-690.56	695.58	1,795.95	1,765.00	30.96	58.014	
6,800.00	6,681.77	6,811.70	6,681.77	21.45	23.23	125.78	-690.56	695.58	1,795.95	1,764.62	31.33	57.324	
6,900.00	6,781.77	6,911.70	6,781.77	21.60	23.36	125.78	-690.56	695.58	1,795.95	1,764.25	31.70	56.647	
7,000.00	6,881.77	7,011.70	6,881.77	21.75	23.48	125.78	-690.56	695.58	1,795.95	1,763.87	32.08	55.982	
7,100.00	6,981.77	7,111.70	6,981.77	21.90	23.61	125.78	-690.56	695.58	1,795.95	1,763.49	32.46	55.329	
7,200.00	7,081.77	7,211.70	7,081.77	22.05	23.74	125.78	-690.56	695.58	1,795.95	1,763.11	32.84	54.689	
7,300.00	7,181.77	7,311.70	7,181.77	22.21	23.86	125.78	-690.56	695.58	1,795.95	1,762.73	33.22	54.060	
7,400.00	7,281.77	7,411.70	7,281.77	22.36	24.00	125.78	-690.56	695.58	1,795.95	1,762.35	33.60	53.443	
7,500.00	7,381.77	7,511.70	7,381.77	22.52	24.13	125.78	-690.56	695.58	1,795.95	1,761.96	33.99	52.838	
7,600.00	7,481.77	7,611.70	7,481.77	22.68	24.26	125.78	-690.56	695.58	1,795.95	1,761.58	34.38	52.243	
7,700.00	7,581.77	7,711.70	7,581.77	22.83	24.40	125.78	-690.56	695.58	1,795.95	1,761.19	34.76	51.660	
7,800.00	7,681.77	7,811.70	7,681.77	22.99	24.53	125.78	-690.56	695.58	1,795.95	1,760.80	35.15	51.087	
7,900.00	7,781.77	7,911.70	7,781.77	23.15	24.67	125.78	-690.56	695.58	1,795.95	1,760.41	35.55	50.525	
8,000.00	7,881.77	8,011.70	7,881.77	23.31	24.81	125.78	-690.56	695.58	1,795.95	1,760.02	35.94	49.974	
8,100.00	7,981.77	8,111.70	7,981.77	23.48	24.95	125.78	-690.56	695.58	1,795.95	1,759.62	36.33	49.432	
8,200.00	8,081.77	8,211.70	8,081.77	23.64	25.09	125.78	-690.56	695.58	1,795.95	1,759.23	36.73	48.901	
8,300.00	8,181.77	8,311.70	8,181.77	23.81	25.23	125.78	-690.56	695.58	1,795.95	1,758.83	37.12	48.379	
8,400.00	8,281.77	8,411.70	8,281.77	23.97	25.38	125.78	-690.56	695.58	1,795.95	1,758.43	37.52	47.866	
8,462.64	8,344.41	8,474.34	8,344.41	24.08	25.47	125.78	-690.56	695.58	1,795.95	1,758.18	37.77	47.550	
8,500.00	8,381.77	8,500.93	8,371.00	24.14	25.51	125.78	-690.56	695.58	1,795.99	1,758.09	37.90	47.390	
8,575.23	8,457.00	8,500.93	8,371.00	24.26	25.51	125.78	-690.56	695.58	1,798.01	1,759.96	38.05	47.249	

Anadarko Petroleum Corporation

Weatherford International Ltd.

Anticollision Report

Weatherford

Company:	ANADARKO PETROLEUM CORP.	**Local Co-ordinate Reference:**	Well BONANZA 1023-5M3BS
Project:	UINTAH COUNTY, UTAH (nad 27)	**TVD Reference:**	WELL @ 5309.00ft (Original Well Elev)
Reference Site:	Bonanza 1023-5M PAD	**MD Reference:**	WELL @ 5309.00ft (Original Well Elev)
Site Error:	0.00ft	**North Reference:**	True
Reference Well:	BONANZA 1023-5M3BS	**Survey Calculation Method:**	Minimum Curvature
Well Error:	0.00ft	**Output errors are at**	2.00 sigma
Reference Wellbore	BONANZA 1023-5M3BS	**Database:**	EDM 2003.21 Single User Db
Reference Design:	PLAN #1 4-27-10 RHS	**Offset TVD Reference:**	Offset Datum

Reference Depths are relative to WELL @ 5309.00ft (Original Well Ele\Coordinates are relative to: BONANZA 1023-5M3BS
Offset Depths are relative to Offset Datum
Coordinate System is Universal Transverse Mercator (US Survey Feet), Zone 12N
Central Meridian is 111° 0' 0.000 W °
Grid Convergence at Surface is: 1.06°

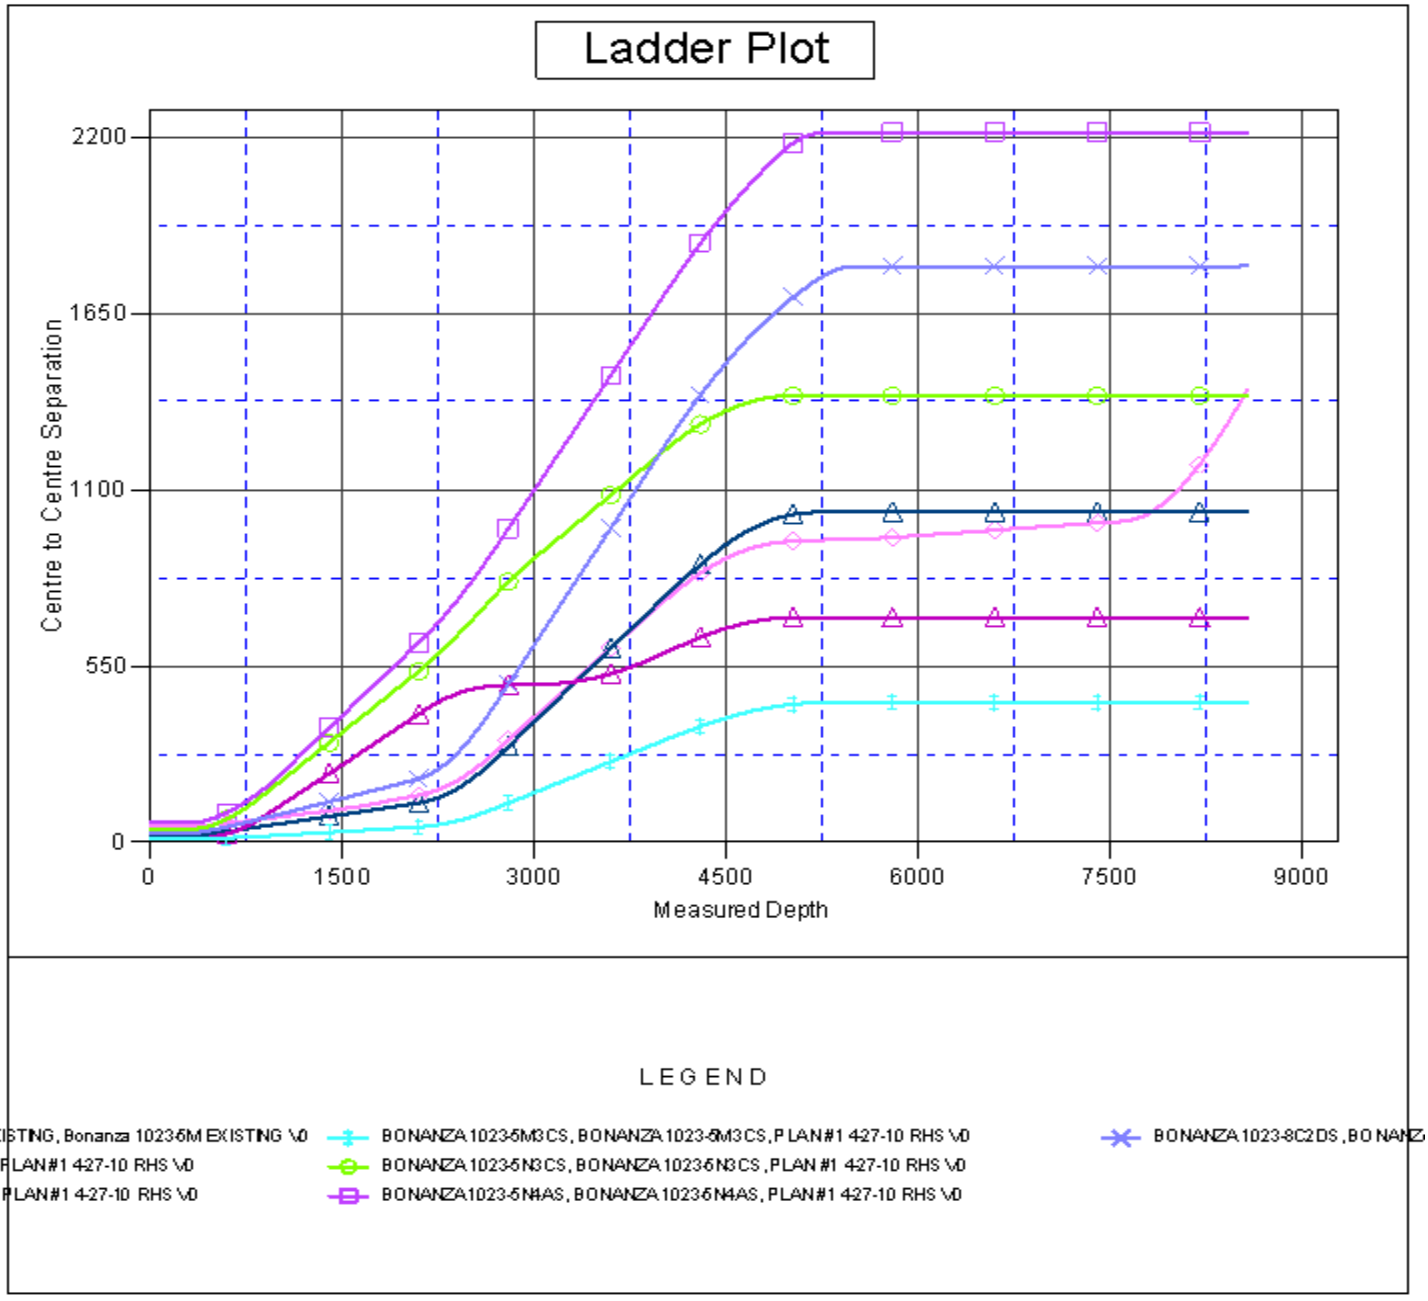

Weatherford International Ltd.

Anticollision Report

Company:	ANADARKO PETROLEUM CORP.	**Local Co-ordinate Reference:**	Well BONANZA 1023-5M3BS
Project:	UINTAH COUNTY, UTAH (nad 27)	**TVD Reference:**	WELL @ 5309.00ft (Original Well Elev)
Reference Site:	Bonanza 1023-5M PAD	**MD Reference:**	WELL @ 5309.00ft (Original Well Elev)
Site Error:	0.00ft	**North Reference:**	True
Reference Well:	BONANZA 1023-5M3BS	**Survey Calculation Method:**	Minimum Curvature
Well Error:	0.00ft	**Output errors are at**	2.00 sigma
Reference Wellbore	BONANZA 1023-5M3BS	**Database:**	EDM 2003.21 Single User Db
Reference Design:	PLAN #1 4-27-10 RHS	**Offset TVD Reference:**	Offset Datum

Reference Depths are relative to WELL @ 5309.00ft (Original Well Ele\Coordinates are relative to: BONANZA 1023-5M3BS
Offset Depths are relative to Offset Datum
Coordinate System is Universal Transverse Mercator (US Survey Feet), Zone 12N
Central Meridian is 111° 0' 0.000 W °
Grid Convergence at Surface is: 1.06°

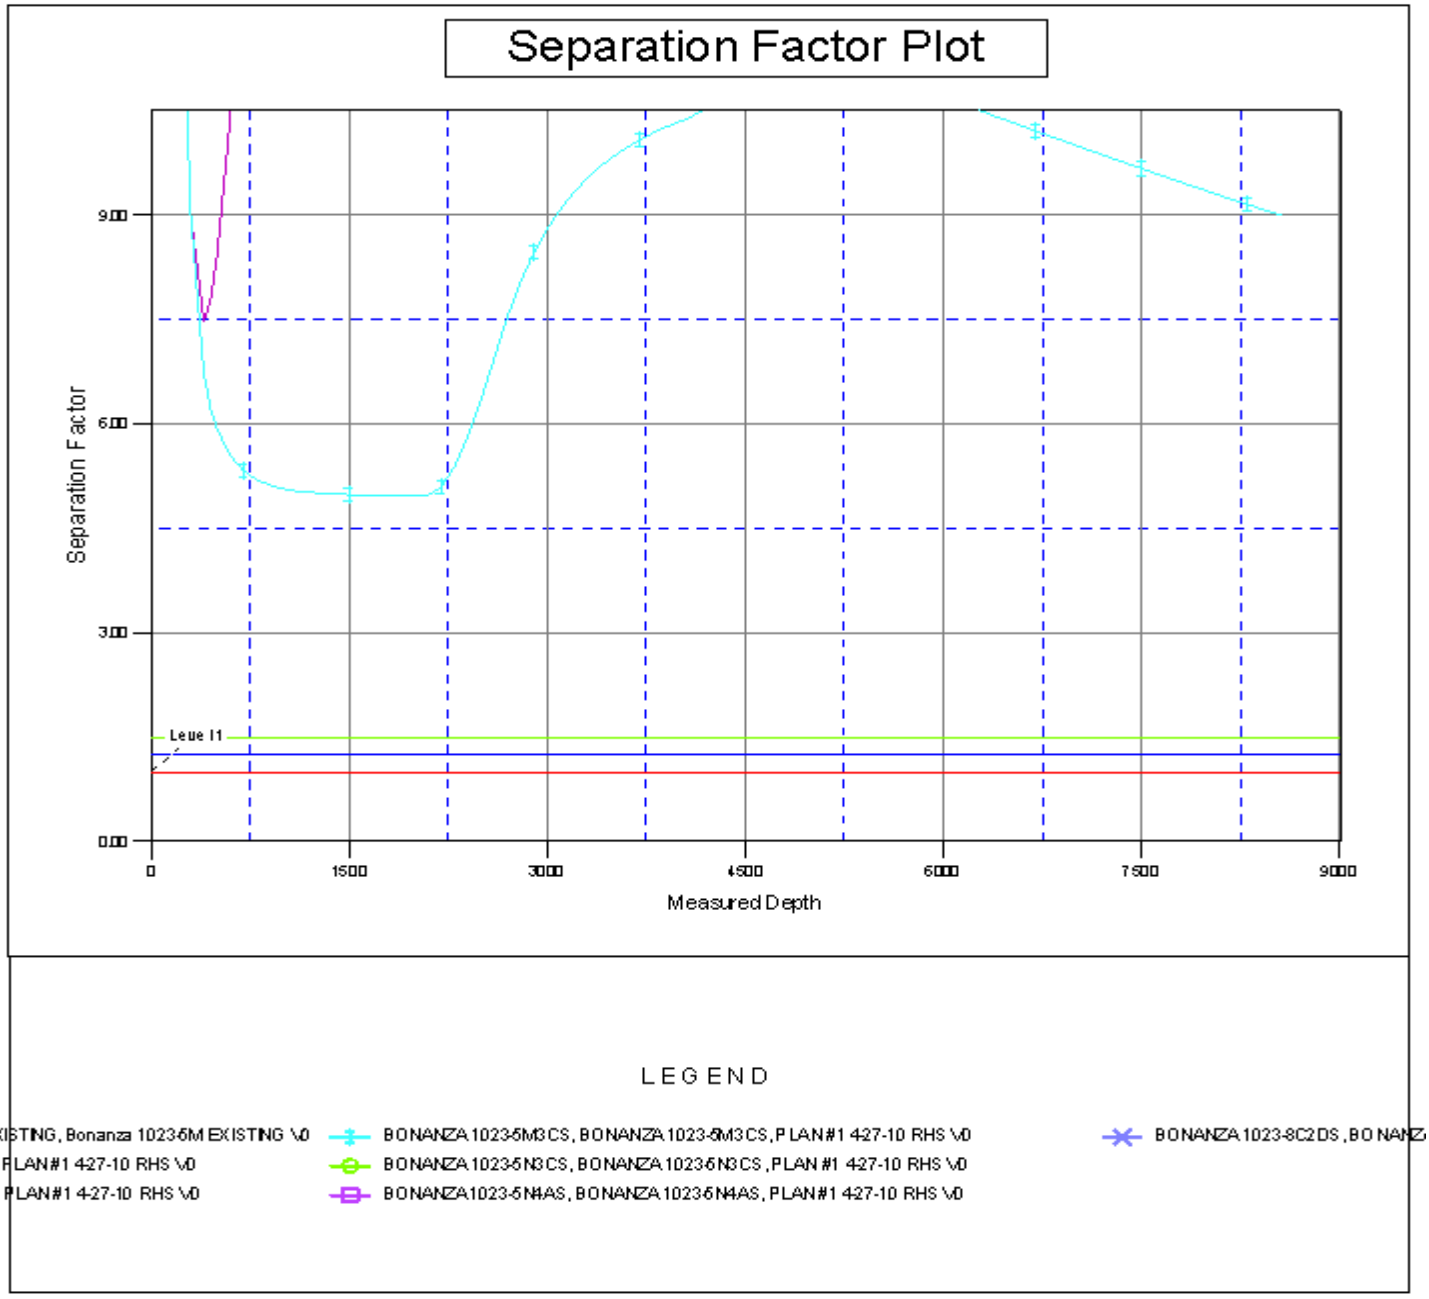

Kerr-McGee Oil & Gas Onshore. L.P.

Bonanza 1023-5M Pad

API #		**BONANZA 1023-5M1AS**		
	Surface:	210 FSL / 1021 FWL	SWSW	Lot
	BHL:	1133 FSL / 1100 FWL	SWSW	Lot
API #		**BONANZA 1023-5M1CS**		
	Surface:	208 FSL / 1011 FWL	SWSW	Lot
	BHL:	800 FSL / 900 FWL	SWSW	Lot
API #		**BONANZA 1023-5M3BS**		
	Surface:	205 FSL / 1001 FWL	SWSW	Lot
	BHL:	566 FSL / 240 FWL	SWSW	Lot
API #		**BONANZA 1023-5M3CS**		
	Surface:	203 FSL / 992 FWL	SWSW	Lot
	BHL:	171 FSL / 55 FWL	SWSW	Lot
API #		**BONANZA 1023-5N3CS**		
	Surface:	215 FSL / 1040 FWL	SWSW	Lot
	BHL:	221 FSL / 1590 FWL	SESW	Lot
API #		**BONANZA 1023-5N4AS**		
	Surface:	220 FSL / 1060 FWL	SWSW	Lot
	BHL:	630 FSL / 2453 FWL	SESW	Lot
API #		**BONANZA 1023-8C2DS**		
	Surface:	213 FSL / 1030 FWL	SWSW	Lot
	BHL:	487 FNL / 1697 FWL	NENW	Lot

This Surface Use Plan of Operations (SUPO) or 13-point plan provides site-specific information for the above-referenced wells.

In accordance with Utah Oil & Gas Conservation Rule R649-3-11 pertaining to Directional Drilling, these wells will be directionally drilled. Refer to Topo Map A for directions to the location and Topo Maps A and B for location of access roads within a 2-mile radius.

An on-site meeting was held on May 19, 2010. Present were:

- David Gordon, NRS; Kevin Sadiler, NRS; Ryan Angus, PET Engineer; Steve Strong, Reclamation; Dan Emmett, Wildlife Biologist - BLM;
- John Slaugh, Mitch Batty, Brian Venn, Jacob Dunham, Jake Edmunds, B.J. Reenders - 609 & Timberline Engineering & Land Surveying, Inc.
- Danielle Piernot and Kathy Schneebeck Dulnoan, Regulatory; Brad Burman, Completions; Clay Einerson, Construction; Grizz Oleen, Environmental; Charles Chase, Reclamation; Lovell Young, Drilling, Roger Parry and Ramey Hoopes, Construction

A. Existing Roads:

Existing roads consist of county and improved/unimproved access roads (two-tracks). In accordance with Onshore Order #1, Kerr-McGee will, in accordance with BMPs, improve or maintain existing roads in a condition

RECEIVED: October 17, 2011

that is the same as or better than before operations began. New or reconstructed proposed access roads are discussed in Section B.

The existing roads will be maintained in a safe and usable condition. Maintenance for existing roads will continue until final abandonment and reclamation of well pads and/or other facilities, as applicable. Road maintenance will include, but is not limited to, blading, ditching, and/or culvert installation and cleanout. To ensure safe operating conditions, gravel surfacing will be performed where excessive rutting or erosion may occur. Dust control will be performed as necessary to ensure safe operating conditions.

Roads, gathering lines and electrical distribution lines will occupy common disturbance corridors where possible. Where available, roadways will be used as the staging area and working space for installation of gathering lines. All disturbances located in the same corridor will overlap each other to the maximum extent possible, while maintaining safe and sound construction and installation practices. Unless otherwise approved or requested in site specific documents, in no case will the maximum disturbance widths of the access road and utility corridors exceed the widths specified in Part D of this document.

Please refer to Topo B, for existing roads.

The following segments are "on-lease"

±140' (0.03 miles) – Section 5 T10S R23E (SW/4 SW/4) – On-lease UTU73450, from the edge of the pad to tie-in to the ROW that is in progress for the Bonanza 1023-6B Pad. Please refer to Topo B.

The following segment is a "ROW in Progress" with the Bonanza 1023-6H Pad

±1,385' (0.3 miles) – Section 5 T10S R23E (SW/4 SW/4) – On-lease UTU73450, traveling southeast through the NW/4 of Section 8 T10S R23E on lease UTU37355 to tie-in to the county road interesection. Please see Exhibit B2, Lines 2 and 1.

B. New or Reconstructed Access Roads:

All new or reconstructed roads will be located, designed, and maintained to meet the standards of the BLM. BMPs. Described in the BLM's Surface Operating Standards for Oil and Gas Exploration and Development, 4th Edition (Gold Book) (USDI and USDA, 2007) and/or BLM Manual Section 9113 (1985) will be considered in consultation with the BLM in the design, construction, improvement and maintenance of all new or reconstructed roads. If a new road would cross a water of the United States, Kerr-McGee will adhere to the requirements of applicable Nationwide Permits of the Department of Army Corps of Engineers.

Each new well pad or pad expansion may require construction of a new access road and/or de-commissioning of an older road. Plans, routes, and distances for new roads and road improvements are provided in design packages, exhibits and maps for a project. Project-specific maps are submitted to depict the locations of existing, proposed, and/or decommissioned and include the locations for supporting structures, including, but not limited to, culverts, bridges, low water crossings, range infrastructure, and haul routes, as per OSO 1. Designs for cuts and fills, including spoils source and storage areas, are provided with the road designs, as necessary.

Where safety objectives can be met. As applicable, Kerr-McGee may use unimproved and/or two-track roads for lease operations, to lessen total disturbance.

Road designs will be based on the road safety requirements, traffic characteristics, environmental conditions, and the vehicles the road is intended to carry. Generally, newly constructed unpaved lease roads will be crowned and ditched with the running surfaces of the roads approximately 12-18 feet wide and a total road corridor width not to exceed 45 feet,

RECEIVED: October 17, 2011

except where noted in the road design for a specific project. Maximum grade will generally not exceed 8%. Borrow ditches will be back sloped 3:1 or less. Construction BMPs will be employed to control onsite and offsite erosion.

Where topography would direct storm water runoff to an access road or well pad, drainage ditches or other common drainage control facilities, such as V- or wing-ditches, will be constructed to divert surface water runoff. Drainage features, including culverts, will be constructed or installed prior to commencing other operations, including drilling or facilities placement. Riprap will be placed at the inlet and outlet at the culvert(s), as necessary.

Prior to construction, new access road(s) will be staked according to the requirements of OSO 1. Construction activity will not be conducted using frozen or saturated materials or during periods when significant watershed damage (e.g. rutting, extensive sheet soil erosion, formation of rills/gullies, etc.) is likely to occur. Vegetative debris will not be placed in or under fill embankments.

New road maintenance will include, but is not limited to, blading, ditching, culvert installation and cleanout, gravel surfacing where excessive rutting or erosion may occur and dust control, as necessary to ensure safe operating conditions. All vehicular traffic, personnel movement, construction/restoration operations will be confined to the approved area and to existing roadways and/or access routes.

Snow removal will be conducted on an as-needed basis to accommodate safe travel. Snow removal will occur as necessary throughout the year, as will necessary drainage ditch construction. Removed snow may be stored on permitted well pads to reduce hauling distances and/or at the aerial extent of approved disturbance boundaries to facilitate snow removal for the remainder of the season.

If a county road crossing or encroachment permit is needed, it will be obtained prior to construction.

There are no new or reconstructed access roads for the proposed well pad.
**Please refer to Topo B.

C. Location of Existing Wells:

A) Refer to Topo Map C.

D. Location of Existing and/or Proposed Facilities:

This pad will expand the existing pad for the Bonanza 1023-5M, which is a producing gas well according to Utah Division of Oil, Gas and Mining (UDOGM) records on May 27, 2011. Gathering (pipeline) infrastructure will be utilized to collect and transport gas and fluids from the wells which are owned and operated by Kerr McGee Oil and Gas Onshore LP (Kerr-McGee).

Should the well(s) prove productive, production facilities will be installed on the disturbed portion of each well pad. A berm will be constructed completely around production components (typically excluding dehy's and/or separators) that contain fluids (i.e. production tanks, produced liquids tanks). The berms will generally be constructed of compacted subsoil or corrugated metal, and will hold the capacity of the largest tank and have sufficient freeboard to accomodate a 25 year rainfall event. This includes pumping units. Aboveground structures constructed or installed onsite for 6 months or longer, will be painted a flat, non-reflective, earth-tone color chosen at the onsite in coordination with the BLM (typically Shadow Gray). A production facility layout is provided as part of a project-specific APD, ROW or NOS submission.

GAS GATHERING

Please refer to Exhibit B and Topo D- Pad and Pipeline Detail.

The gas gathering pipeline material: Steel line pipe. Surface = Bare pipe. Buried = Coated with fusion bonded epoxy coating (or equivalent). The total gas gathering pipeline distance from the meter to the tie in point is ±16,720' and the individual segments are broken up as follows:

The following segments are "onlease", no ROW needed.

±700' (0.1 miles) – Section 5 T10S R23E (SW/4 SW/4) – On-lease UTU73450, BLM surface, New 10" buried gas gathering pipeline from the meter to the edge of the pad. Please refer to Topo D2 - Pad and Pipeline Detail.

±280' (0.1 miles) – Section 5 T10S R23E (SW/4 SW/4) – On-lease UTU73450, BLM surface, New 10" buried gas gathering pipeline from the edge of the pad to the tie-in at the proposed 16" gas gathering pipeline. Please refer to Topo D2 and Exhibit A, Line 14.

The following segment is a "ROW in Progress" with the Bonanza 1023-6B Pad

±15,740' (3.0 miles) – Section 5 T10S R23E (SW/4 SW/4) – On-lease UTU73450, traveling northwest, dipping into Section 8, T10S R23E on lease UTU37355 and traveling back through Section 5, T10S R23E. Then traveling northwesterly through Section 6, T10S R23E on lease UTU38419 to section boundary. Continuing on southwesterly direction through the W/2 of Section 1 T10S R22E on lease UTU011336 to state section boundary at Section 2, T10S R22E. Please see Exhibit A1, Lines 3, 4, 5, 6, 8, 9 and 10.

The remaining gas pipeline section that will go to the existing Tank Battery, will be on state surface. Kerr-McGee will apply for the appropriate state rights of way.

Kerr-McGee, additionally will install a gas gathering line in a southeasterly direction to tie into an existing buried pipeline. The total of this proposed gas gathering from the meter to the tie in point is ±2,400 and the individual segments are broken up as follows:

The following segments are "onlease", no ROW needed.

±700' (0.1 miles) – Section 5 T10S R23E (SW/4 SW/4) – On-lease UTU73450, BLM surface, New 10" buried gas gathering pipeline from the meter to the edge of the pad. Please refer to Topo D2 - Pad and Pipeline Detail.

±280' (0.1 miles) – Section 5 T10S R23E (SW/4 SW/4) – On-lease UTU73450, BLM surface, New 10" buried gas gathering pipeline from the edge of the pad to the tie-in at the proposed 16" gas gathering pipeline. Please refer to Topo D2 and Exhibit A, Line 14.

The following segment is a "ROW in Progress" with the Bonanza 1023-6B Pad

±1,420' (0.3 miles) – Section 5 T10S R23E (SW/4 SW/4) – On-lease UTU73450, traveling southeast through the NW/4 of Section 8 T10S R23E on lease UTU37355 to tie-in the existing 16" gas gathering pipeline. Please see Exhibit A1, Lines 2 and 1.

LIQUID GATHERING

The total liquid gathering pipeline distance from the separator to the tie in point is ±16,720' and the individual segments are broken up as follows:

The following segments are "onlease", no ROW needed.

±700' (0.1 miles) – Section 5 T10S R23E (SW/4 SW/4) – On-lease UTU73450, BLM surface, New 6" buried liquid gathering pipeline from the separator to the edge of the pad. Please refer to Topo D2 - Pad and Pipeline Detail.

RECEIVED: October 17, 2011

±280' (0.1 miles) – Section 5 T10S R23E (SW/4 SW/4) – Lease UTU73450, BLM surface, New 6" buried liquid gathering pipeline from the edge of the pad to the tie-in at the proposed 6" buried liquid gathering line (SW/4 SW/4 of section 5). Please refer to Topo D2 and Exhibit B1, Line 9.

The following segment is a "ROW in Progress" with the Bonanza 1023-6B Pad

±15,740' (3.0 miles) – Section 5 T10S R23E (SW/4 SW/4) – On-lease UTU73450, traveling northwest, dipping into Section 8, T10S R23E on lease UTU37355 and traveling back through Section 5, T10S R23E. Then traveling northwesterly through Section 6, T10S R23E on lease UTU38419 to section boundary. Continuing on southwesterly direction through the W/2 of Section 1 T10S R22E on lease UTU011336 to state section boundary at Section 2, T10S R22E. Please see Exhibit A1, Lines 3, 4, 5, 6, 8, 9 and 10.

The remaining liquid pipeline section that will go to the existing Tank Battery, will be on state surface. Kerr-McGee will apply for the appropriate state rights of way.

Kerr-McGee, additionally will install a liquid gathering line in a southeasterly direction to tie into an existing buried pipeline. The total of this proposed liquid gathering from the separator to the tie in point is ±2,400 and the individual segments are broken up as follows:

The following segments are "onlease", no ROW needed.

±700' (0.1 miles) – Section 5 T10S R23E (SW/4 SW/4) – On-lease UTU73450, BLM surface, New 6" buried liquid gathering pipeline from the separator to the edge of the pad. Please refer to Topo D2 - Pad and Pipeline Detail.

±280' (0.1 miles) – Section 5 T10S R23E (SW/4 SW/4) – Lease UTU73450, BLM surface, New 6" buried liquid gathering pipeline from the edge of the pad to the tie-in at the proposed 6" buried liquid gathering line (SW/4 SW/4 of section 5). Please refer to Topo D2 and Exhibit B1, Line 9.

The following segment is a "ROW in Progress" with the Bonanza 1023-6B Pad

±2,400' (0.3 miles) – Section 5 T10S R23E (SW/4 SW/4) – On-lease UTU73450, traveling southeast through the NW/4 of Section 8 T10S R23E on lease UTU37355 to tie-in the existing liquid gathering pipeline. Please see Exhibit A1, Lines 2 and 1.

Pipeline Gathering Construction

Gathering (pipeline) infrastructure will be utilized to collect and transport gas and fluids from the wells which are owned and operated by Kerr McGee. Gas gathering pipeline(s,) gas lift, or liquids pipelines may be constructed to lie on the surface or be buried. Where the pipeline is adjacent to the road or well pad, the road and/or well pad will be utilized for construction activities and staging. The area of disturbance during construction from the edge of road or well pad will typically be 30' in width. Where pipelines run cross country, the width of disturbance will typically be 45 ft for buried lines and 30 ft for surface lines. In addition, Kerr-McGee requests for a permanent 30' distrubance width that will be maintained for the portion adjacent to the road. The need for the 30' permanent distrubance width is for maintenance and repairs. Cross country permanent distrubance width also are required to be 30ft.

Above-ground installation will generally not require clearing of vegetation or blading of the surface, except where safety considerations necessitate earthwork. In some surface pipeline installation instances pipe cannot be constructed where it will lay. In these cases where an above-ground pipeline is constructed parallel and adjacent to a road, it will be welded/fused on the road and then lifted from the road to the pipeline route. In other cases where a pipeline route is not parallel and adjacent to a road (cross-country between sites), it will be welded/fused in place at a well pad, access road, or designated work area and pulled between connection locations with a suitable piece of equipment.

Buried pipelines will generally be installed parallel and adjacent to existing and/or newly constructed roads and within the permitted disturbance corridor. Buried pipelines may vary from 2 inches (typically fuel gas lines) to 24 inches (typically transportation lines) in diameter, but 6 to 16 inches is typical for a buried gas line. The diameter of liquids pipelines may vary from 2 inches to 12 inches, but 6 inches is the typical diameter. Gas lift lines may vary from 2 to 12 inches in diameter,

RECEIVED: October 17, 2011

but 6-inch diameter pipes are generally used for gas lift. If two or more pipelines are present (gas gathering, gas lift, and fluids), they will share a common trench where possible.

Typically, to install a buried pipeline, topsoil will be removed, windrowed and placed on the non-working side of the route for later reclamation. Because working room is limited, the spoil may be spread out across the working side and construction will take place on the spoil. The working side of the corridor will be used for pipe stringing, bending, welding and equipment travel. Small areas on the working side displaying ruts or uneven ground will be groomed to facilitate the safe passage of equipment. After the pipelines are installed, spoil will be placed back into the trench, and the topsoil will be redistributed over the disturbed corridor prior to final reclamation. Typical depth of the trench will be 6 feet, but depths may vary according to site-specific conditions (presence of bedrock, etc.). The proposed trench width for the pipeline would range from 18-48 inches.

The pipeline will be welded along the proposed route and lowered into place. Trenching equipment will cut through the soil or into the bedrock and create good backfill, eliminating the need to remove large rocks. The proposed buried pipeline will be visually and radiographically inspected and the entire pipeline will be pneumatically or hydrostatically tested before being placed into service. Routine vehicle traffic will be prevented from using pipeline routes as travel ways by posting signs at the route's intersection with an access road.

The liquid gathering lines will be made of polyethylene or a composite polyethylene/steel or polyethylene/fiberglass that is not subject to internal or external pipe corrosion. The content of the produced fluids to be transferred by the liquid gathering system will be approximately 92% produced water and 8% condensate. Trunk line valve connections for the water gathering system will be below ground but accessible from the surface in order to prevent freezing during winter time.

If pipelines or roads encounter a drainage that could be subject to flooding or surface water during extreme precipitation events, Kerr-McGee will apply all applicable Army Corps mandates as well as the BLM's Hydraulic Considerations for Pipeline Crossings of Stream Channels (BLM Technical Note 423, April 2007). In addition, all stream and drainage crossings will be evaluated to determine the need for stream alteration permits from the State of Utah Division of Water Rights and if necessary, required permits will be secured. Similarly, where a road or pipeline crossing exists the pipe will be butt welded and buried to a depth between 24 and 48 inches or more. Dirt roads will be cut and restored to a condition equivalent to the existing condition. All Uintah County road encroachment and crossing permits, where applicable, will be obtained prior to crossing construction. In no case will pressure testing of pipelines result in discharge of liquids to the surface.

Pipeline signs will be installed along the route to indicate the pipeline proximity, ownership, and to provide emergency contact phone numbers. Above ground valves and lateral T's will be installed at various locations for production integrity and safety purposes.

Upon completion of the proposed buried pipeline, the entire area of disturbance will be reclaimed to the standards proposed in the Green River District Reclamation Guidelines. Please refer to section J for more details regarding final reclamation.

When no longer deemed necessary by the operator, Kerr-McGee or it's successor will consult with the BLM, Vernal Field Office before terminating of the use of the pipeline(s).

The Anadarko Completions Transportation System (ACTS) information:

Please refer to Exhibit C for ACTs Lines

Kerr-McGee will use either a closed loop drilling system that will require one pit and one storage area to be constructed on the drilling pad or a traditional drilling operation with one pit. The storage area will be used to contain only the de-watered drill cuttings and will be lined and reclaimed according to traditional pit closure standards. The pit will be constructed to allow for completion operations. The completion operations pit is lined and will be used for the wells drilled on the pad or

RECEIVED: October 17, 2011

used as part of our Anadarko Completions Transportation (ACTS) system which is disussed in more detail below. Using the closed loop drilling system will allow Kerr-McGee to decrease the amount of disturbance/footprint on location compared to a single large drilling/completion pit.

If Kerr-McGee does not use a closed loop system, it will construct a drilling reserve pit to contain drill cuttings and for use in completion operations. Depending on the location of the pit, its relation to future drilling locations, the reserve/completion pit will be utilized for the completion of the wells on that pad and/or be used as part of our ACTS system.

Kerr-McGee will use ACTS to optimize the completion processes for multiple pads across the project area which may include up to a section of development. ACTS will facilitate management of frac fluids by utilizing existing reserve pits and temporary, surface-laid aluminum liquids transfer lines between frac locations. The pit will be refurbished as follows when a traditional drill pit is used: mix and pile up drill cuttings with dry dirt, bury the original liner in the pit, walk bottom of pit with cat. Kerr-McGee will reline the pit with a 30 mil liner and double felt padding. The refurbished pit will be the same size or smaller as specified in the originally approved ROW/APD. The pit refurb will be done in a normal procedure and there will be no modification to the pit.

All four sides of the completions pit will be fenced in according to standard pit fencing procedures. Netting will be installed over all pits.

The collected hydrocarbons will be treated and sold at approved sales facilities. A loading rack with drip containment will also be installed where water trucks would unload and load to prevent damage caused from pulling hoses in and out of the pit .

ACTS will require temporarily laying multiple 6” aluminum water transfer lines on the surface between either existing or refurbished reserve pits. Please see the attached ACTS exhibit C for placement of the proposed temporary lines. The temporary aluminum transfer lines will be utilized to transport frac fluid being injected and/or recovered during the completion process and will be laid adjacent to existing access roads or pipeline corridors. Upon completion of the frac operation, the liquids transfer lines will be flushed with fresh water and purged with compressed air. The contents of the transfer lines will be flushed into a water truck for delivery to another ACTS location or a reserve pit.

The volume of frac fluid transported through a water transfer line will vary, but volume is projected to be approximately 1.75 bbls per 50-foot joint. Although the maximum working pressure is 125 psig, the liquids transfer lines will be operated at a pressure of approximately 30 to 40 psig. Kerr-McGee requests to keep the netted pit open for one year from first production of the first produced well on the pad. During this time the surrounding well location completion fluids may be recycled in this pit and utilized for other frac jobs in the area. After one year Kerr-McGee will backfill the pit and reclaim. If the pit is not needed for an entire year it will be backfilled and reclaimed earlier. Kerr-McGee understands that due to the temporary nature of this system, BLM considers this a casual use situation; therefore, no permanent ROW or temporary use plan will need to be issued by the BLM.

E. Location and Types of Water Supply:

Water for drilling and completion operations will be obtained from the following sources:

Permit # 49-2307	JD Field Services	Green River- Section 15, T2N, R22E
Permit # 49-2321	R.N. Industries	White River- Section 2, T10S, R24E
Permit # 49-2319	R.N. Industries	White River- Various Sources
Permit # 49-2320	R.N. Industries	Green River- Section 33, T8S, R23E

Water will be hauled to location over the roads marked on Maps A and B.

No water well is to be drilled on this lease.

RECEIVED: October 17, 2011

F. Construction Materials:

Construction operations will typically be completed with native materials found on location. Construction materials that must be imported to the site (mineral material aggregate, soils or materials suitable for fill/surfacing) will be obtained from a nearby permitted source (described in site-specific documents). No construction materials will be removed from federal lands without prior approval from the BLM. A source location other than an on-location construction site will be designated either via a map or narrative within the project specific materials provided to the BLM.

G. Methods for Handling Waste:

All wastes subject to regulation will be handled in compliance with applicable laws to minimize the potential for leaks or spills to the environment. Kerr-McGee also maintains a Spill Control and Countermeasure Plan, which includes notification requirements, including the BLM, for all reportable spills of oil, produced liquids, and hazardous materials.

Any accidental release, such as a leak or spill in excess of the reportable quantity, as established by 40 CFR Part 117.3, will be reported as per the requirements of CERCLA, Section 102 B. If a release involves petroleum hydrocarbons or produced liquids, Kerr-McGee will comply with the notification requirements of NTL-3A. Drill cuttings and/or drilling fluids will be contained in the reserve/frac pit whether a closed loop system is used or not. Cuttings will be buried in pit(s) upon closure. Unless specifically approved by the BLM, no oil or other oil-based drilling additives, chromium/metals-based, or saline muds will be used during drilling. Only fresh water (as specified above), biodegradable polymer soap, bentonite clay, and/or non-toxic additives will be used in the mud system.

Pits will be constructed to minimize the accumulation of surface precipitation runoff into the pit (via appropriate placement of subsoil storage areas and/or construction of berms, ditches, etc). Should unexpected liquid petroleum hydrocarbons (crude oil or condensate) be encountered during drilling, completions or well testing, liquid petroleum hydrocarbons will either be contained in test tanks on the well site or evacuated by vacuum trucks and transported to an approved disposal/ sales facility. Should petroleum hydrocarbons unexpectedly be released into a pit, they will be removed as soon as practical but in no case will they remain longer than 72 hours unless an alternate is approved by the BLM. Should timely removal not be feasible, the pit will be netted as soon as practical. Similarly, hydrocarbon removal will take place prior to the closure of the pit, unless authorization is provided for disposal via alternate pit closure methods (e.g. solidification).

The reserve and/or fracture stimulation pit will be lined with an impermeable liner. The liner will be a synthetic material 30 mil or thicker. The bottom and side walls of the pit will be void of any sharp rocks that could puncture the liner. The liner will be installed over smooth fill subgrade that is free of pockets, loose rocks, or other materials (i.e. sand, sifted dirt, bentonite, straw, etc.) that could damage the liner. After evaporation and when dry, the reserve pit liners will be cut off, ripped and/or folded back (as safety considerations allow) as near to the mud surface as possible and buried on location or hauled to a landfill prior to backfilling the pit with a minimum of five feet of soil material.

Where necessary and if conditions (freeboard, etc.) allow, produced liquids from newly completed wells may be temporarily disposed of into pits for a period not to exceed 90 days as per Onshore Order Number 7 (OSO 7). Subsequently, permanent approved produced water disposal methods will be employed in accordance with OSO 7 and/or as described in a Water Management Plan (WMP). Otherwise, fluids disposal locations and associated haul routes, for ROW consideration, are typically depicted on Topo A of individual projects. Revisions to the water source or method of transportation will be subject to written approval from the BLM.

Any additional pits necessary for subsequent operations, such as temporary flare or workover pits, will be contained within the originally approved well pad and disturbance boundaries. Such temporary pits will be backfilled and reclaimed within 180 days of completion of work at a well location.

Pits containing drilling cuttings, mud, and/or completions fluids will be allowed to dry. Any free fluids remaining after one year from reaching total depth, date of completion, and/or determination of inactivity will be removed (as weather conditions

RECEIVED: October 17, 2011

allow) to an approved site and the pit reclaimed. Installation and operation of any sprinklers, pumps, and equipment will ensure that water spray or mist does not drift.

No garbage or non-exempt substances as defined by Resource Conservation and Recovery Act (RCRA) subtitle C will be placed in the reserve pit. All refuse (trash and other solid waste including cans, paper, cable, etc.) generated during construction, drilling, completion, and well testing activities will be contained in an enclosed receptacle, removed from the drill locations promptly, and transported to an approved disposal facility. Immediately after removal of the drilling rig, all debris and other waste materials not contained within trash receptacles will be collected and removed from the well location.

For the protection of livestock and wildlife, all open pits (excluding flare pits) will be fenced to prevent wildlife or livestock entry. Total height of pit fencing will be at least 42 inches and corner posts will be cemented and/or braced in such a manner as to keep the fence tight at all times. Standard steel, wood, or pipe posts shall be used between the corner braces. Maximum distance between any 2 fence posts shall be no greater than 16 feet. Siphons, catchments, and absorbent pads will be installed to keep hydrocarbons produced by the drilling rig or other equipment on location from entering the reserve pit. Hydrocarbons, contaminated pads, and/or soils will be disposed of in accordance with state and federal requirements. Portable, self-contained chemical toilets and/or sewage processing facilities will be provided for human waste disposal. Upon completion of operations, or as required, the toilet holding tanks will be pumped and the contents disposed of in an approved sewage disposal facility. All applicable regulations pertaining to disposal of human and solid waste will be observed.

Materials Management

Hazardous materials above reportable quantities will not be produced by drilling or completing proposed wells or constructing the pipelines/facilities. The term “hazardous materials” as used here means: (1) any substance, pollutant, or containment listed as hazardous under the Comprehensive Environmental Response, Compensation, and Liability Act (CERCLA) of 1980, as amended 42 U.S.C. 9601 et seq., and the regulations issued under CERCLA; and (2) any hazardous waste as defined in RCRA of 1976, as amended. In addition, no extremely hazardous substance, as defined in 40 CFR 355, in threshold planning quantities, would be used, produced, stored, transported, or disposed of while producing any well.

Hazardous materials may be contained in some grease or lubricants, solvents, acids, paint, and herbicides, among others as defined above. Kerr-McGee maintains a file, per 29 CFR 1910.1200 (g) containing current Material Safety Data Sheets (MSDS) for all chemicals, compounds, and/or substances that are used during the course of construction, drilling, completion, and production operations for this project. The transport, use, storage and handling of hazardous materials will follow procedures specified by federal and state regulations. Transportation of hazardous materials to the well location is regulated by the Department of Transportation (DOT) under 49 CFR, Parts 171-180. DOT regulations pertain to the packing, container handling, labeling, vehicle placarding, and other safety aspects.

Potentially hazardous materials used in the development or operation of wells will be kept in limited quantities on well sites and at the production facilities for short periods of time. Chemicals meeting the criteria for being an acutely hazardous material/substance or meet the quantities criteria per BLM Instruction Memorandum No. 93-344 will not be used.

Chemicals subject to reporting under Title III of the Superfund Amendments and Reauthorization Act (SARA) in quantities of 10,000 pounds or more may be produced and/or stored at production facilities (crude oil/condensate, produced water). They may also be kept in limited quantities on drilling sites (barite, diesel fuel, cement, cottonseed hulls etc.) for short periods of time during drilling or completion activities.

Fluids disposal and pipeline/haul routes are depicted on Topo Map A.

RECEIVED: October 17, 2011

Any produced water separated from recoverable condensate from the proposed well will be contained in a water tank and will then be transported by pipeline and/or truck to one of the pre-approved disposal sites:

RNI in Sec. 5 T9S R22E
NBU #159 in Sec. 35 T9S R21E
Ace Oilfield in Sec. 2 T6S R20E
MC&MC in Sec. 12 T6S R19E
Pipeline Facility in Sec. 36 T9S R20E
Goat Pasture Evaporation Pond in SW/4 Sec. 16 T10S R22E
Bonanza Evaporation Pond in Sec. 2 T10S R23E

Or to one of the following Kerr-McGee active Salt Water Disposal (SWD) wells:

NBU 159 SWD in Sec. 35 T9S R21E
CIGE 112D SWD in Sec. 19 T9S R21E
CIGE 114 SWD in Sec. 34 T9S R21E
NBU 921-34K SWD in Sec. 34 T9S R21E
NBU 921-33F SWD in Sec. 34 T9S R21E

H. Ancillary Facilities:

No additional ancillary facilities are planned for this location.

I. Well Site Layout:

The location, orientation and aerial extent of each drill pad, reserve/completion/flare pit (for closed loop or non-closed loop operations), access road ingress/egress points, drilling rig, dikes/ditches, existing wells/infrastructure, proposed cuts and fills, and topsoil and spoil material stockpile locations are depicted on the exhibits for each project, where applicable. Site-specific conditions may require slight deviation in actual equipment depending on whether a closed loop system is used. Surface distance may be less if using closed loop. But in either case, the area of distrubance will not exceed the maximum disturbance outlined in the attached exhibits.

For the protection of livestock and wildlife, all open pits and cellars will be fenced to prevent wildlife or livestock entry. Total height of pit fencing will be at least 42 inches and corner posts will be cemented and/or braced in such a manner as to keep the fence tight at all times. Standard steel, wood, or pipe posts shall be used between the corner braces. Maximum distance between any 2 fence posts shall be no greater than 16 feet.

Each well will utilize either a centralized tank battery, centralized fluids management system, or have tanks installed on its pad. Production/ Produced Liquid tanks will be constructed, maintained, and operated to prevent unauthorized surface or subsurface discharges of liquids and to prevent livestock or wildlife entry. The tanks will be kept reasonably free from surface accumulations of liquid hydrocarbons. The tanks are not to be used for disposal of liquids from additional sources without prior approval of BLM.

J. Plans for Surface Reclamation:

The surface reclamation will be undertaken in two phases: interim and final. Interim reclamation is conducted following well completion and extends through the period of production. Interim reclamation is for the area of the well pad that is not required for production activities. Final reclamation is conducted following well plugging/conversion and/or facility abandonment processes.

RECEIVED: October 17, 2011

Reclamation activities in both phases may include but is not limited to the re-contouring or re-configuration of topographic surfaces, restoration of drainage systems, segregation of spoils materials, minimizing surface disturbance, re-evaluating backfill requirements, pit closure, topsoil redistribution, soil treatments, seeding and weed control.

Interim Reclamation

Interim reclamation may include pit evaporation, fluid removal, pit solidification, re-contouring, ripping, spreading top soil, seeding, and/or weed control. Interim reclamation will be performed in accordance with OSO 1, or written notification will be provided to the BLM for approval. Where feasible, drilling locations, reserve pits, or access routes not utilized for production operations will be re-contoured to a natural appearance.

Interim re-contouring involves bringing all construction material from cuts and fills back onto the well pad and site and reestablishing the natural contours where desirable and practical. Fill and stockpiled spoils no longer necessary to the operation will be spread on the cut slopes and covered with stockpiled topsoil. All stockpiled top soils will be used for interim reclamation where practical to maintain soil viability. Where possible, the land surface will be left “rough” after re-contouring to ensure that the maximum surface area will be available to support the reestablishment of vegetative cover.

A reserve pit, upon being allowed to dry, will be backfilled and compacted with cover materials that are void of any topsoil, vegetation, large stones, rocks or foreign objects. Soils that are moisture laden, saturated, or partially/completely frozen will not be used for backfill or cover. The pit area will be mounded to allow for settling and to promote positive surface drainage away from the pit. Disposal of pit fluids and linings is discussed in Section G.

Final Reclamation

Final reclamation will be performed for unproductive wells and after the end of the life of a productive well. As soon as practical after the conclusion of drilling and testing operations, unproductive drill holes will be plugged and abandoned (P&A). Site and road reclamation will commence following plugging. In no case will reclamation at non-producing locations be initiated later than six (6) months from the date a well is plugged. A joint inspection of the disturbed area to be reclaimed may be requested by Kerr-McGee. The primary purpose of this inspection will be to review the existing conditions, or agree upon a revised final reclamation and abandonment plan. The BLM will be notified prior to commencement of reclamation operations. A Notice of Intent to Abandon will be filed for final recommendations regarding surface reclamation.

After plugging, all wellhead equipment that is no longer needed will be removed, and the well site will be reclaimed. Final contouring will blend with and follow as closely as practical the natural terrain and contours of the original site and surrounding areas. After re-contouring the site to the approximate contour that existed prior to pad construction, final grading will be conducted over the entire surface of the well site and access road. The area will be ripped to a depth of 18 to 24 inches on 18 to 24-inch centers, where practical. The surface soil material will be pitted with small depressions to form longitudinal depressions 12 to 18 inches deep, where practical. The entire area will be uniformly covered with the depressions constructed perpendicular to the natural flow of water.

Reclamation of roads will be performed at the discretion of the BLM. All unnecessary surface equipment and structures (e.g. cattle guards) and water control structures (e.g. culverts, drainage pipes) not needed to facilitate successful reclamation will be removed during final reclamation. Roads that will be reclaimed will be ripped to a depth of 18 inches where practical, re-contoured to approximate the original contour of the ground and seeded in accordance with the seeding specifications of the BLM.

Upon successfully completing reclamation of a P&A location, a Final Abandonment Notice will be submitted to the BLM.

Measures Common to Interim and Final Reclamation

RECEIVED: October 17, 2011

Soil preparation will be conducted using a disk for areas in need of more soil preparation following site preparation. This will provide primary soil tillage to a depth no greater than 6 inches. Prior to reseeding, compacted areas will be scarified by ripping or chiseling to loosen compacted soils, promote water infiltration, and improve soil aeration and root penetration.

Seeding will occur year-round as conditions allow and will typically be accomplished through the use of a no-till rangeland style seed drill with a "picker box" in order to seed "fluffy" seed. Where drill seeding is not the preferred method, seed will be broadcast and then raked into the ground at double the rate of drill seeding. Seed mixes appropriate to the native plant community as determined and specified for each project location based on the site specific soils will be used for re-vegetation. The seed mixes will be selected from a list provided by or approved by the BLM, or a specific seed mix will be proposed by Kerr-McGee to the BLM and used after its approval. The selected specific seed mix for each well location and road segment will be utilized while performing interim and final reclamation for each project. All seed will be certified and tags will be maintained by Kerr-McGee. Every effort will be made to obtain "cheat grass free seed".

Seed Mix to be used for Well Site, Access Road, and Pipeline (as applicable):

Bonanza Area Mix	**Pure Live Seed lbs/acre**
Crested Wheat (Hycrest)	2
Bottlebrush Squirreltail	1
Western Wheatgrass (Arriba)	1
Indian Ricegrass	1
Fourwing Saltbush	2
Shadscale	2
Forage Kochia	0.25
Rocky Mountain Bee	0.5
Total	9.75

Additional soil amendments and/or stabilization may be required on sites with poor soils and/or excessive erosion potential. Where severe erosion can become a problem and/or the use of machinery is not practical, seed will be hand broadcast and raked with twice the specified amount of seed. Slopes will be stabilized using materials specifically designed to prevent erosion on steep slopes and hold seed in place so vegetation can become permanently established. These materials will include, but are not limited to: erosion control blankets, hydro-mulch, and/or bonded fiber matrix at a rate to achieve a minimum of 80 percent soil coverage. Soil amendments such as "Sustain" (an organic fertilizer that will be applied at the rate 1,800 – 2,100 lbs/acre with seed) may also be dry broadcast or applied with hydro-seeding equipment.

Weed Control

All weed management will be done in accordance with the Vernal BLM Surface Disturbance Weed Policy. Noxious weeds will be controlled, as applicable, on project areas. Monitoring and management of noxious and/or invasive weeds of concern will be completed annually until the project is deemed successfully reclaimed by the surface management agency and/or owner according to the Anadarko Integrated Weed Management Plan. Noxious weed infestations will be mapped using a GPS unit and submitted to the BLM with information required in the Vernal BLM Surface Disturbance Weed Policy. If herbicide is to be applied it will be done according to an approved Pesticide Use Permit (PUP), inclusive of applicable locations. All pesticide applications will be recorded using a Pesticide Application Record (PAR) and will be submitted along with a Pesticide Use Report (PUR) annually prior to Dec. 31.

Monitoring

Monitoring of reclaimed project areas will be completed annually during the growing season and actions to ensure reclamation success will be taken as needed. During the first two growing seasons an ocular methodology will be used to determine the success of the reclamation activities. During the 3rd growing season a 200 point line intercept (quantitative) methodology will be used to obtain basal cover. The goal is to have the reclaimed area reach 30% basal cover when compared to the reference site. If after three growing seasons the area has not reached 30% basal cover, additional reclamation activities may be necessary. Monitoring will continue until the reclaimed area reaches 75% basal cover of desirable vegetation when compared to the reference site. (Green River District Reclamation Guidelines)

RECEIVED: October 17, 2011

All monitoring reports will be submitted electronically to the Vernal BLM in the form of a geo-database no later than March 1st of the calendar year following the data collection.

K. Surface/Mineral Ownership:

United States of America
Bureau of Land Management
170 South 500 East
Vernal, UT 84078
(435)781-4400

L. Other Information:

Onsite Specifics:

- Construction: 30 Mil Double Felt
- Facilities: Will be painted Shadow Grey
- Top Soil: Need to save 4" topsoil and will be move and put around the corner
- Wildlife Stips: Golden Eagle and Lease stip for Raptor
- Will need separate condensate tank because the Bonanza 1023-8C2DS bottom hole location crosses CA boundary.

Cultural and Paleontological Resources

All personnel are strictly prohibited from collecting artifacts, any paleontological specimens or fossils, and from disturbing any significant cultural resources in the area. If artifacts, fossils, or any culturally sensitive materials are exposed or identified in the area of construction, all construction operations that would affect the newly discovered resource will cease, and Kerr-McGee will provide immediate notification to the BLM.

Resource Reports:

A Class I literature survey was completed on April 23, 2010 by Montgomery Archaeological Consultants, Inc (MOAC). For additional details please refer to report MOAC 10-056.

A paleontological reconnaissance survey was completed on May 13, 2010 by SWCA Environmental Consultants. For additional details please refer to report UT10-14314-16.

Biological field survey was completed on April 12, 2010 by Grasslands Consulting, Inc (GCI). For additional details please refer to report GCI-208.

RECEIVED: October 17, 2011

Proposed Action Annual Emissions Tables:

Table 1: Proposed Action Annual Emissions (tons/year)[1]

Pollutant	Development	Production	Total
NOx	3.8	0.12	3.92
CO	2.2	0.11	2.31
VOC	0.1	4.9	5
SO_2	0.005	0.0043	0.0093
PM_{10}	1.7	0.11	1.81
$PM_{2.5}$	0.4	0.025	0.425
Benzene	2.2E-03	0.044	0.046
Toluene	1.6E-03	0.103	0.105
Ethylbenzene	3.4E-04	0.005	0.005
Xylene	1.1E-03	0.076	0.077
n-Hexane	1.7E-04	0.145	0.145
Formaldehyde	1.3E-02	8.64E-05	1.31E-02

[1] Emissions include 1 producing well and associated operations traffic during the year in which the project is developed

Table 2: Proposed Action versus 2012 WRAP Phase III Emissions Inventory Comparison

Species	Proposed Action Production Emissions (ton/yr)	2012 Uintah Basin Emission Inventory[a] (ton/yr)	Percentage of Proposed Action to WRAP Phase III
NOx	27.44	16,547	0.17%
VOC	35	127,495	0.03%

[a] http://www.wrapair.org/forums/ogwg/PhaseIII_Inventory.html Uintah Basin Data

RECEIVED: October 17, 2011

M. Lessee's or Operators' Representative & Certification:

Gina T. Becker
Regulatory Analyst II
Kerr-McGee Oil & Gas Onshore LP
PO Box 173779
Denver, CO 80217-3779
(720) 929-6086

Tommy Thompson
General Manager, Drilling
Kerr-McGee Oil & Gas Onshore LP
PO Box 173779
Denver, CO 80217-3779
(720) 929-6724

Certification: All lease and/or unit operations will be conducted in such a manner that full compliance is made with all applicable laws, regulations, Onshore Oil and Gas Orders, the approved Plan of Operations, and any applicable Notice to Lessees.

The Operator will be fully responsible for the actions of its subcontractors. A complete copy of the approved "Application for Permit to Drill" will be furnished to the field representative(s) to ensure compliance and shall be on location during all construction and drilling operations.

Kerr-McGee Oil & Gas Onshore LP is considered to be the operator of the subject well. Kerr-McGee Oil & Gas Onshore LP agrees to be responsible under terms and conditions of the lease for the operations conducted upon leased lands.

Bond coverage pursuant to 43 CFR 3104 for lease activities is being provided by Bureau of Land Management Nationwide Bond WYB000291.

I hereby certify that I, or persons under my supervision, have inspected the proposed drill site and access route, that I am familiar with the conditions that currently exist; that I have full knowledge of the State and Federal laws applicable to this operation; that the statements made in this plan are, to the best of my knowledge, true and correct; and the work associated with the operations proposed herein will be performed in conformity with this APD package and the terms and conditions under which it is approved. I also certify that I, or the company I represent, am responsible for operations conducted under this application. These statements are subject to the provisions of 18 U.S.C. 1001 for the filing of false statements.

Gina T.Becker

October 12, 2011
Date

Joseph D. Johnson
LANDMAN

Kerr-McGee Oil & Gas Onshore LP
P.O. Box 173779
Denver, CO 80217-3779

June 7, 2011

Ms. Diana Mason
Division of Oil, Gas and Mining
P.O. Box 145801
Salt Lake City, UT 84114-6100

Re: Exception Location R649-3-3 and Directional Drilling R649-3-11
Bonanza 1023-5M3BS
T10S- R23E
Section 5: SWSW/SWSW
205' FSL, 1001' FWL (surface)
566' FSL, 240' FWL (bottom hole)
Uintah County, Utah

Dear Ms. Mason:

Pursuant to the filing of Kerr-McGee Oil & Gas Onshore LP's (Kerr-McGee) Application for Permit to Drill regarding the above referenced well, we are hereby submitting this letter in accordance with Oil & Gas Conservation Rule R649-3-3 and Rule R649-3-11 pertaining to the Exception to Location and Siting of Wells.

- Kerr-McGee's Bonanza 1023-5M3BS is located within the area covered by Docket No. 2008-011 authorizing the equivalent of an approximate 10-acre well density pattern, and requiring approval for wells drilled at an exception location and wells drilled directionally in accordance with the referenced rules.

- Kerr-McGee is permitting this well at this location for geological reasons. Locating the well at the surface location and directionally drilling from this location, Kerr-McGee will be able to minimize surface disturbance.

- Furthermore, Kerr-McGee certifies that it is the sole working interest owner within 460 feet of the entire directional well bore.

Therefore, based on the above stated information Kerr-McGee Oil & Gas Onshore LP requests the permit be granted pursuant to Rule R6493-3 and Rule R649-3-11.

Sincerely,

KERR-MCGEE OIL & GAS ONSHORE LP

Joseph D. Johnson
Landman

RECEIVED: October 17, 2011

API Well Number: 43047520770000

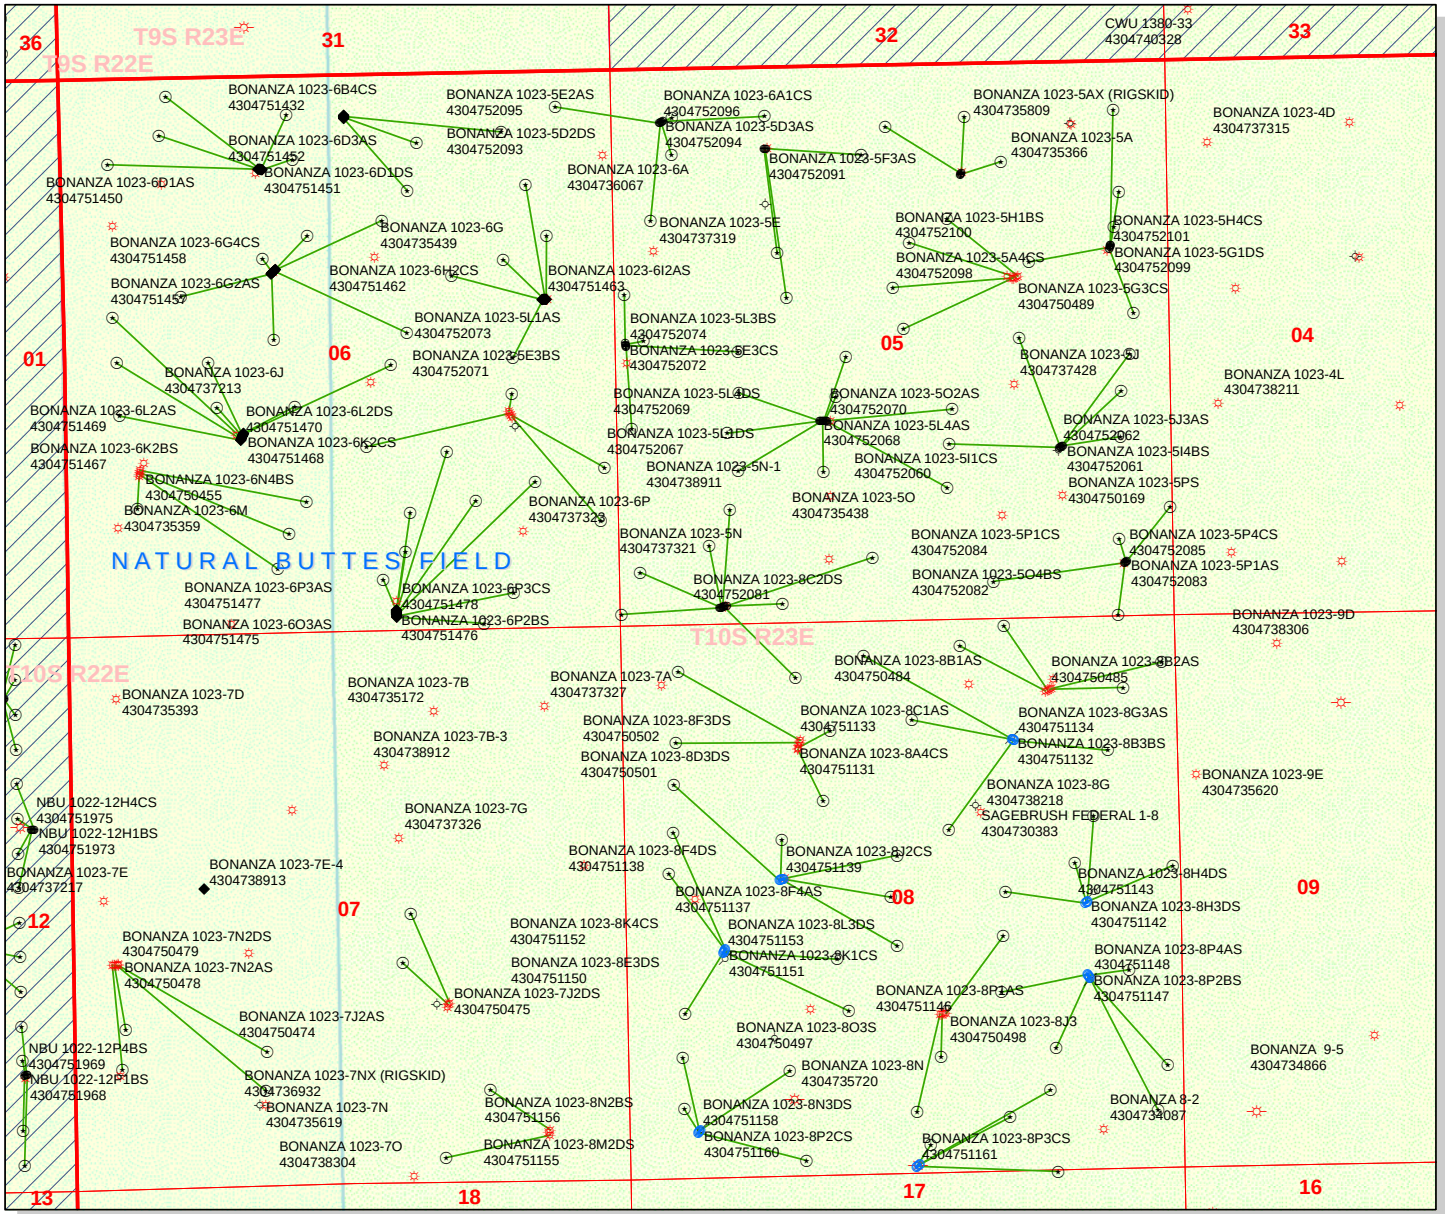

API Number: 4304752077

Well Name: BONANZA 1023-5M3BS

Township T1.0 . Range R2.3 . Section 05

Meridian: SLBM

Operator: KERR-MCGEE OIL & GAS ONSHORE, L.P.

Map Prepared:
Map Produced by Diana Mason

Units
STATUS
- ACTIVE
- EXPLORATORY
- GAS STORAGE
- NF PP OIL
- NF SECONDARY
- PI OIL
- PP GAS
- PP GEOTHERML
- PP OIL
- SECONDARY
- TERMINATED

Fields
STATUS
- Unknown
- ABANDONED
- ACTIVE
- COMBINED
- INACTIVE
- STORAGE
- TERMINATED

Wells Query
Status
- APD - Aproved Permit
- DRL - Spuded (Drilling Commenced)
- GIW - Gas Injection
- GS - Gas Storage
- LA - Location Abandoned
- LOC - New Location
- OPS - Operation Suspended
- PA - Plugged Abandoned
- PGW - Producing Gas Well
- POW - Producing Oil Well
- RET - Returned APD
- SGW - Shut-in Gas Well
- SOW - Shut-in Oil Well
- TA - Temp. Abandoned
- TW - Test Well
- WDW - Water Disposal
- WIW - Water Injection Well
- WSW - Water Supply Well

1,500 750 0 1,500 Feet

1:14,184

RECEIVED: October 26, 2011

WORKSHEET
APPLICATION FOR PERMIT TO DRILL

APD RECEIVED: 10/17/2011 **API NO. ASSIGNED:** 43047520770000
WELL NAME: BONANZA 1023-5M3BS
OPERATOR: KERR-MCGEE OIL & GAS ONSHORE, L.P. (N2995) **PHONE NUMBER:** 720 929-6086
CONTACT: Gina Becker

PROPOSED LOCATION: SWSW 05 100S 230E **Permit Tech Review:** ✔

SURFACE: 0205 FSL 1001 FWL **Engineering Review:** ✔

BOTTOM: 0566 FSL 0240 FWL **Geology Review:** ✔

COUNTY: UINTAH
LATITUDE: 39.97114 **LONGITUDE:** -109.35671
UTM SURF EASTINGS: 640333.00 **NORTHINGS:** 4425847.00
FIELD NAME: NATURAL BUTTES
LEASE TYPE: 1 - Federal
LEASE NUMBER: UTU73450 **PROPOSED PRODUCING FORMATION(S):** WASATCH-MESA VERDE
SURFACE OWNER: 1 - Federal **COALBED METHANE:** NO

RECEIVED AND/OR REVIEWED:

- ✔ **PLAT**
- ✔ **Bond:** FEDERAL - WYB000291
- ☐ **Potash**
- ☐ **Oil Shale 190-5**
- ☐ **Oil Shale 190-3**
- ☐ **Oil Shale 190-13**
- ✔ **Water Permit:** 43-8496
- ☐ **RDCC Review:**
- ☐ **Fee Surface Agreement**
- ✔ **Intent to Commingle**

Commingling Approved

LOCATION AND SITING:

- ☐ **R649-2-3.**

Unit:

- ☐ **R649-3-2. General**
- ✔ **R649-3-3. Exception**
- ✔ **Drilling Unit**

Board Cause No: Cause 179-14
Effective Date: 6/12/2008
Siting: 460' Fr Ext Drl Unit Boundary

- ✔ **R649-3-11. Directional Drill**

Comments: Presite Completed

Stipulations:
1 - Exception Location - dmason
3 - Commingling - ddoucet
4 - Federal Approval - dmason
15 - Directional - dmason

RECEIVED: October 26, 2011

GARY R. HERBERT
Governor
GREGORY S. BELL
Lieutenant Governor

State of Utah
DEPARTMENT OF NATURAL RESOURCES
MICHAEL R. STYLER
Executive Director
Division of Oil, Gas and Mining
JOHN R. BAZA
Division Director

Permit To Drill

****

Well Name: BONANZA 1023-5M3BS
API Well Number: 43047520770000
Lease Number: UTU73450
Surface Owner: FEDERAL
Approval Date: 10/26/2011

Issued to:
KERR-MCGEE OIL & GAS ONSHORE, L.P., P.O. Box 173779, Denver, CO 80217

Authority:
Pursuant to Utah Code Ann. §40-6-1 et seq., and Utah Administrative Code R649-3-1 et seq., the Utah Division of Oil, Gas and Mining issues conditions of approval, and permit to drill the listed well. This permit is issued in accordance with the requirements of Cause 179-14. The expected producing formation or pool is the WASATCH-MESA VERDE Formation(s), completion into any other zones will require filing a Sundry Notice (Form 9). Completion and commingling of more than one pool will require approval in accordance with R649-3-22.

Duration:
This approval shall expire one year from the above date unless substantial and continuous operation is underway, or a request for extension is made prior to the expiration date

Exception Location:
Appropriate information has been submitted to DOGM and administrative approval of the requested exception location is hereby granted.

Commingle:
In accordance with Board Cause No. 179-14, commingling of the production from the Wasatch formation and the Mesaverde formation in this well is allowed.

General:
Compliance with the requirements of Utah Admin. R. 649-1 et seq., the Oil and Gas Conservation General Rules, and the applicable terms and provisions of the approved Application for permit to drill.

Conditions of Approval:
State approval of this well does not supercede the required federal approval, which must be obtained prior to drilling.

In accordance with Utah Admin. R.649-3-11, Directional Drilling, the operator shall submit a complete angular deviation and directional survey report to the Division within 30 days following completion of the well.

Notification Requirements:

API Well No: 43047520770000

The operator is required to notify the Division of Oil, Gas and Mining of the following actions during drilling of this well:

- Within 24 hours following the spudding of the well – contact Carol Daniels at 801-538-5284 (please leave a voicemail message if not available)
  OR
  submit an electronic sundry notice (pre-registration required) via the Utah Oil & Gas website at http://oilgas.ogm.utah.gov

Reporting Requirements:

All reports, forms and submittals as required by the Utah Oil and Gas Conservation General Rules will be promptly filed with the Division of Oil, Gas and Mining, including but not limited to:

- Entity Action Form (Form 6) – due within 5 days of spudding the well
- Monthly Status Report (Form 9) – due by 5th day of the following calendar month
- Requests to Change Plans (Form 9) – due prior to implementation
- Written Notice of Emergency Changes (Form 9) – due within 5 days
- Notice of Operations Suspension or Resumption (Form 9) – due prior to implementation
- Report of Water Encountered (Form 7) – due within 30 days after completion
- Well Completion Report (Form 8) – due within 30 days after completion or plugging

Approved By:

For John Rogers
Associate Director, Oil & Gas

Form 3160-3
(August 2007)

RECEIVED

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

JUL 2 2 2011

BLM

FORM APPROVED
OMB No. 1004-0136
Expires July 31, 2010

APPLICATION FOR PERMIT TO DRILL OR REENTER

1a. Type of Work: ☒ DRILL ☐ REENTER	5. Lease Serial No. UTU73450
	6. If Indian, Allottee or Tribe Name
	7. If Unit or CA Agreement, Name and No. CA-UTU-74473
1b. Type of Well: ☐ Oil Well ☒ Gas Well ☐ Other ☐ Single Zone ☒ Multiple Zone	8. Lease Name and Well No. BONANZA 1023-5M3BS
2. Name of Operator KERR-MCGEE OIL & GAS ONSHORE LP Contact: GINA T BECKER Email: GINA.BECKER@ANADARKO.COM	9. API Well No. 43-047-52077
3a. Address P.O. BOX 173779 DENVER, CO 80202-3779 / 3b. Phone No. (include area code) Ph: 720-929-6086 Fx: 720-929-7086	10. Field and Pool, or Exploratory BONANZA
4. Location of Well (*Report location clearly and in accordance with any State requirements.**) At surface SWSW 205FSL 1001FWL 39.971262 N Lat, 109.356545 W Lon At proposed prod. zone SWSW 566FSL 240FWL 39.972249 N Lat, 109.359262 W Lon	11. Sec., T., R., M., or Blk. and Survey or Area Sec 5 T10S R23E Mer SLB
14. Distance in miles and direction from nearest town or post office* APPROXIMATELY 49 MILES SOUTHEAST OF VERNAL, UTAH	12. County or Parish UINTAH / 13. State UT
15. Distance from proposed location to nearest property or lease line, ft. (Also to nearest drig. unit line, if any) 240 / 16. No. of Acres in Lease 80.00	17. Spacing Unit dedicated to this well
18. Distance from proposed location to nearest well, drilling, completed, applied for, on this lease, ft. 240 / 19. Proposed Depth 8575 MD 8457 TVD	20. BLM/BIA Bond No. on file WYB000291
21. Elevations (Show whether DF, KB, RT, GL, etc. 5297 GL / 22. Approximate date work will start 12/31/2011	23. Estimated duration 60-90 DAYS

24. Attachments

The following, completed in accordance with the requirements of Onshore Oil and Gas Order No. 1, shall be attached to this form:

1. Well plat certified by a registered surveyor.
2. A Drilling Plan.
3. A Surface Use Plan (if the location is on National Forest System Lands, the SUPO shall be filed with the appropriate Forest Service Office).
4. Bond to cover the operations unless covered by an existing bond on file (see Item 20 above).
5. Operator certification
6. Such other site specific information and/or plans as may be required by the authorized officer.

25. Signature (Electronic Submission)	Name (Printed/Typed) GINA T BECKER Ph: 720-929-6086	Date 07/08/2011
Title REGULATORY ANALYST II		
Approved by (Signature)	Name (Printed/Typed) Jerry Kenczka	Date JAN 3 0 2012
Title Assistant Field Manager Lands & Mineral Resources	Office VERNAL FIELD OFFICE	

Application approval does not warrant or certify the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.
Conditions of approval, if any, are attached. CONDITIONS OF APPROVAL ATTACHED

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

Additional Operator Remarks (see next page)

Electronic Submission #112513 verified by the BLM Well Information System
For KERR-MCGEE OIL & GAS ONSHORE, sent to the Vernal

RECEIVED
FEB 0 3 2012
DIV. OF OIL, GAS & MINING

NOTICE OF APPROVAL

UDOGM

**** OPERATOR-SUBMITTED ** OPERATOR-SUBMITTED ** OPERATOR-SUBMITTED ****

10GW2810AE NOS-4/14/2010

UNITED STATES DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT
VERNAL FIELD OFFICE
170 South 500 East VERNAL, UT 84078 (435) 781-4400

CONDITIONS OF APPROVAL FOR APPLICATION FOR PERMIT TO DRILL

Company:	**Kerr-McGee Oil & Gas Onshore, LP**	**Location:**	**SWSW, Sec. 5, T10S, R23E**
Well No:	**Bonanza 1023-5M3BS**	**Lease No:**	**UTU-73450**
API No:	**43-047-52077**	**Agreement:**	

OFFICE NUMBER: (435) 781-4400

OFFICE FAX NUMBER: (435) 781-3420

A COPY OF THESE CONDITIONS SHALL BE FURNISHED TO YOUR FIELD REPRESENTATIVE TO INSURE COMPLIANCE

All lease and/or unit operations are to be conducted in such a manner that full compliance is made with the applicable laws, regulations (43 CFR Part 3160), and this approved Application for Permit to Drill including Surface and Downhole Conditions of Approval. The operator is considered fully responsible for the actions of his subcontractors. A copy of the approved APD must be on location during construction, drilling, and completion operations. **This permit is approved for a two (2) year period, or until lease expiration, whichever occurs first. An additional extension, up to two (2) years, may be applied for by sundry notice prior to expiration.**

NOTIFICATION REQUIREMENTS

Location Construction (Notify Environmental Scientist)	-	Forty-Eight (48) hours prior to construction of location and access roads.
Location Completion (Notify Environmental Scientist)	-	Prior to moving on the drilling rig.
Spud Notice (Notify Petroleum Engineer)	-	Twenty-Four (24) hours prior to spudding the well.
Casing String & Cementing (Notify Supv. Petroleum Tech.)	-	Twenty-Four (24) hours prior to running casing and cementing all casing strings to: blm_ut_vn_opreport@blm.gov
BOP & Related Equipment Tests (Notify Supv. Petroleum Tech.)	-	Twenty-Four (24) hours prior to initiating pressure tests.
First Production Notice (Notify Petroleum Engineer)	-	Within Five (5) business days after new well begins or production resumes after well has been off production for more than ninety (90) days.

SURFACE USE PROGRAM
CONDITIONS OF APPROVAL (COAs)

- All new and replacement internal combustion gas field engines of less than or equal to 300 design-rated horse power must not emit more than 2 grams of NOx per horsepower-hour. This requirement does not apply to gas field engines of less than or equal to 40 design-rated horsepower-hour.

- All new and replacement internal combustion gas field engines of greater than 300 design rated horsepower must not emit more than 1.0 gram of NOx per horsepower-hour.

- Construction or drilling is not allowed for the Bonanza 1023-5M and Bonanza 1023-5P pads from January 1 – August 31 to minimize impacts during golden eagle nesting.

- If it is anticipated that construction or drilling will occur during the given timing restriction, a BLM or qualified biologist shall be notified to conduct surveys for raptors. Depending upon the results of the surveys, permission to proceed may or may not be granted by the Authorized Officer.

- All reclamation will comply with the Green River Reclamation Guidelines

- All vehicles and equipment shall be cleaned either through power-washing, or other approved method, if the vehicles or equipment were previously operated outside the Uinta Basin, to prevent weed seed introduction.

- All disturbance areas shall be monitored for noxious weeds annually, for a minimum of three growing seasons following completion of project or until desirable vegetation is established

- Noxious and invasive weeds will be controlled throughout the area of project disturbance.

- Noxious weeds will be inventoried and reported to BLM in the annual reclamation report. Where an integrated pest management program is applicable, coordination has been undertaken with the state and local management program (if existing). A copy of the pest management plan will be submitted for each project.

- A pesticide use permit (PUP) will be obtained for the project, if applicable.

- A permitted paleontologist is to be present to monitor construction at well pads 1023-5C, 5D, 5K, 5L, 5M and 5P during all surface disturbing actives: examples include the following building of the well pad, access road, and pipelines.

- The best method to avoid entrainment is to pump from an off-channel location – one that does not connect to the river during high spring flows. An infiltration gallery constructed in a BLM and Service approved location is best.

- If the pump head is located in the river channel where larval fish are known to occur, the following measures apply:
  a. do not situate the pump in a low-flow or no-flow area as these habitats tend to concentrate larval fishes;
  b. limit the amount of pumping, to the greatest extent possible, during that period of the year when larval fish may be present (April 1 to August 31); and

c. limit the amount of pumping, to the greatest extent possible, during the pre-dawn hours as larval drift studies indicate that this is a period of greatest daily activity.

- Screen all pump intakes with 3/32" mesh material.

- Approach velocities for intake structures will follow the National Marine Fisheries Service's document "Fish Screening Criteria for Anadromous Salmonids". For projects with an in-stream intake that operate in stream reaches where larval fish may be present, the approach velocity will not exceed 0.33 feet per second (ft/s).

- Report any fish impinged on the intake screen to the Service (801.975.3330) and the Utah Division of Wildlife Resources:
  Northeastern Region
  152 East 100 North, Vernal, UT 84078
  Phone: (435) 781-9453

- Discovery Stipulation: Reinitiation of section 7 consultation with the USFWS will be sought immediately if any loss of plants or occupied habitat for Pariette cactus or Uinta Basin hookless cactus is anticipated as a result of project activities.

DOWNHOLE PROGRAM
CONDITIONS OF APPROVAL (COAs)

SITE SPECIFIC DOWNHOLE COAs:

- Gamma ray Log shall be run from Total Depth to Surface.
- Cement for the production casing must be brought 200' above the surface casing shoe.
- CBL will be run from TD to TOC.

Variances Granted: Air Drilling

- Properly lubricated and maintained rotating head. Variance granted to use a properly maintained and lubricated diverter bowl in place of a rotating head.
- Blooie line discharge 100' from the well bore. Variance granted for blooie line discharge to be 45' from the well bore.
- Compressors located in the opposite direction from the blooie line a minimum of 100' from the well bore. Variance granted for truck/trailer mounted air compressors located 40'from the well bore.
- In lieu of mud products on location, Kerr McGee will fill the reserve pit with water for the kill medium and will utilize a skid pump near the reserve pit to supply the water to the well bore if necessary.
- Automatic igniter. Variance granted for igniter due to there being no productive formations encountered while air drilling.

All provisions outlined in Onshore Oil & Gas Order #2 Drilling Operations shall be strictly adhered to. The following items are emphasized:

DRILLING/COMPLETION/PRODUCING OPERATING STANDARDS

- The spud date and time shall be reported orally to Vernal Field Office within 24 hours of spudding.
- Notify Vernal Field Office Supervisory Petroleum Engineering Technician at least 24 hours in advance of casing cementing operations and BOPE & casing pressure tests.
- All requirements listed in Onshore Order #2 III. E. Special Drilling Operations are applicable for air drilling of surface hole.
- Blowout prevention equipment (BOPE) shall remain in use until the well is completed or abandoned. Closing unit controls shall remain unobstructed and readily accessible at all times. Choke manifolds shall be located outside of the rig substructure.
- All BOPE components shall be inspected daily and those inspections shall be recorded in the daily drilling report. Components shall be operated and tested as required by Onshore Oil & Gas Order No. 2 to insure good mechanical working order. All BOPE pressure tests shall be performed by a

test pump with a chart recorder and **NOT** by the rig pumps. Test shall be reported in the driller's log.

- BOP drills shall be initially conducted by each drilling crew within 24 hours of drilling out from under the surface casing and weekly thereafter as specified in Onshore Oil & Gas Order No. 2.

- Casing pressure tests are required before drilling out from under all casing strings set and cemented in place.

- No aggressive/fresh hard-banded drill pipe shall be used within casing.

- **Cement baskets shall not be run on surface casing.**

- The operator must report all shows of water or water-bearing sands to the BLM. If flowing water is encountered it must be sampled, analyzed, and a copy of the analyses submitted to the BLM Vernal Field Office.

- The operator must report encounters of all non oil & gas mineral resources (such as Gilsonite, tar sands, oil shale, trona, etc.) to the Vernal Field Office, in writing, within 5 working days of each encounter. Each report shall include the well name/number, well location, date and depth (from KB or GL) of encounter, vertical footage of the encounter and, the name of the person making the report (along with a telephone number) should the BLM need to obtain additional information.

- A complete set of angular deviation and directional surveys of a directional well will be submitted to the Vernal BLM office engineer within 30 days of the completion of the well.

- While actively drilling, chronologic drilling progress reports shall be filed directly with the BLM, Vernal Field Office on a weekly basis in sundry, letter format or e-mail to the Petroleum Engineers until the well is completed.

- A cement bond log (CBL) will be run from the production casing shoe to the top of cement and shall be utilized to determine the bond quality for the production casing. Submit a field copy of the CBL to this office.

- **Please submit an electronic copy of all other logs run on this well in LAS format to BLM_UT_VN_Welllogs@BLM.gov. This submission will supersede the requirement for submittal of paper logs to the BLM.**

- There shall be no deviation from the proposed drilling, completion, and/or workover program as approved. Safe drilling and operating practices must be observed. Any changes in operation must have prior approval from the BLM Vernal Field Office.

OPERATING REQUIREMENT REMINDERS:

- All wells, whether drilling, producing, suspended, or abandoned, shall be identified in accordance with 43 CFR 3162.6. There shall be a sign or marker with the name of the operator, lease serial number, well number, and surveyed description of the well.
- For information regarding production reporting, contact the Office of Natural Resources Revenue (ONRR) at www.ONRR.gov.
- Should the well be successfully completed for production, the BLM Vernal Field office must be notified when it is placed in a producing status. Such notification will be by written communication and must be received in this office by not later than the fifth business day following the date on which the well is placed on production. The notification shall provide, as a minimum, the following informational items:
    - Operator name, address, and telephone number.
    - Well name and number.
    - Well location (¼¼, Sec., Twn, Rng, and P.M.).
    - Date well was placed in a producing status (date of first production for which royalty will be paid).
    - The nature of the well's production, (i.e., crude oil, or crude oil and casing head gas, or natural gas and entrained liquid hydrocarbons).
    - The Federal or Indian lease prefix and number on which the well is located; otherwise the non-Federal or non-Indian land category, i.e., State or private.
    - Unit agreement and/or participating area name and number, if applicable.
    - Communitization agreement number, if applicable.
- Any venting or flaring of gas shall be done in accordance with Notice to Lessees (NTL) 4A and needs prior approval from the BLM Vernal Field Office.
- All undesirable events (fires, accidents, blowouts, spills, discharges) as specified in NTL 3A will be reported to the BLM, Vernal Field Office. Major events, as defined in NTL3A, shall be reported verbally within 24 hours, followed by a written report within 15 days. "Other than Major Events" will be reported in writing within 15 days. "Minor Events" will be reported on the Monthly Report of Operations and Production.
- Whether the well is completed as a dry hole or as a producer, "Well Completion and Recompletion Report and Log" (BLM Form 3160-4) shall be submitted not later than 30 days after completion of the well or after completion of operations being performed, in accordance with 43 CFR 3162.4-1. Two copies of all logs run, core descriptions, and all other surveys or data obtained and compiled during the drilling, workover, and/or completion operations, shall be filed on BLM Form 3160-4. Submit with the well completion report a geologic report including, at a minimum, formation tops, and a summary and conclusions. Also include deviation surveys, sample descriptions, strip logs,

core data, drill stem test data, and results of production tests if performed. Samples (cuttings, fluid, and/or gas) shall be submitted only when requested by the BLM, Vernal Field Office.

- All off-lease storage, off-lease measurement, or commingling on-lease or off-lease, shall have prior written approval from the BLM Vernal Field Office.

- Oil and gas meters shall be calibrated in place prior to any deliveries. The BLM Vernal Field Office Petroleum Engineers will be provided with a date and time for the initial meter calibration and all future meter proving schedules. A copy of the meter calibration reports shall be submitted to the BLM Vernal Field Office. All measurement facilities will conform to the API standards for liquid hydrocarbons and the AGA standards for natural gas measurement. All measurement points shall be identified as the point of sale or allocation for royalty purposes.

- A schematic facilities diagram as required by Onshore Oil & Gas Order No. 3 shall be submitted to the BLM Vernal Field Office within 30 days of installation or first production, whichever occurs first. All site security regulations as specified in Onshore Oil & Gas Order No. 3 shall be adhered to. All product lines entering and leaving hydrocarbon storage tanks will be effectively sealed in accordance with Onshore Oil & Gas Order No. 3.

- Any additional construction, reconstruction, or alterations of facilities, including roads, gathering lines, batteries, etc., which will result in the disturbance of new ground, shall require the filing of a suitable plan and need prior approval of the BLM Vernal Field Office. Emergency approval may be obtained orally, but such approval does not waive the written report requirement.

- No location shall be constructed or moved, no well shall be plugged, and no drilling or workover equipment shall be removed from a well to be placed in a suspended status without prior approval of the BLM Vernal Field Office. If operations are to be suspended for more than 30 days, prior approval of the BLM Vernal Field Office shall be obtained and notification given before resumption of operations.

- Pursuant to Onshore Oil & Gas Order No. 7, this is authorization for pit disposal of water produced from this well for a period of 90 days from the date of initial production. A permanent disposal method must be approved by this office and in operation prior to the end of this 90-day period. In order to meet this deadline, an application for the proposed permanent disposal method shall be submitted along with any necessary water analyses, as soon as possible, but no later than 45 days after the date of first production. Any method of disposal which has not been approved prior to the end of the authorized 90-day period will be considered as an Incident of Noncompliance and will be grounds for issuing a shut-in order until an acceptable manner for disposing of said water is provided and approved by this office.

- Unless the plugging is to take place immediately upon receipt of oral approval, the Field Office Petroleum Engineers must be notified at least 24 hours in advance of the plugging of the well, in order that a representative may witness plugging operations. If a well is suspended or abandoned, all pits must be fenced immediately until they are backfilled. The "Subsequent Report of Abandonment" (Form BLM 3160-5) must be submitted within 30 days after the actual plugging of the well bore, showing location of plugs, amount of cement in each, and amount of casing left in hole, and the current status of the surface restoration.

STATE OF UTAH
DEPARTMENT OF NATURAL RESOURCES
DIVISION OF OIL, GAS, AND MINING

FORM 9

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.

5.LEASE DESIGNATION AND SERIAL NUMBER: UTU73450

6. IF INDIAN, ALLOTTEE OR TRIBE NAME:

7.UNIT or CA AGREEMENT NAME:

1. TYPE OF WELL
Gas Well

8. WELL NAME and NUMBER:
BONANZA 1023-5M3BS

2. NAME OF OPERATOR:
KERR-MCGEE OIL & GAS ONSHORE, L.P.

9. API NUMBER:
43047520770000

3. ADDRESS OF OPERATOR:
P.O. Box 173779 1099 18th Street, Suite 600, Denver, CO, 80217 3779

PHONE NUMBER:
720 929-6526

9. FIELD and POOL or WILDCAT:
NATURAL BUTTES

4. LOCATION OF WELL
FOOTAGES AT SURFACE:
0205 FSL 1001 FWL
QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN:
Qtr/Qtr: SWSW Section: 05 Township: 10.0S Range: 23.0E Meridian: S

COUNTY:
UINTAH

STATE:
UTAH

11.
CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION		
☐ NOTICE OF INTENT Approximate date work will start:	☐ ACIDIZE	☐ ALTER CASING	☐ CASING REPAIR
☐ SUBSEQUENT REPORT Date of Work Completion:	☐ CHANGE TO PREVIOUS PLANS	☐ CHANGE TUBING	☐ CHANGE WELL NAME
	☐ CHANGE WELL STATUS	☐ COMMINGLE PRODUCING FORMATIONS	☐ CONVERT WELL TYPE
	☐ DEEPEN	☐ FRACTURE TREAT	☐ NEW CONSTRUCTION
	☐ OPERATOR CHANGE	☐ PLUG AND ABANDON	☐ PLUG BACK
✓ SPUD REPORT Date of Spud: 4/19/2012	☐ PRODUCTION START OR RESUME	☐ RECLAMATION OF WELL SITE	☐ RECOMPLETE DIFFERENT FORMATION
	☐ REPERFORATE CURRENT FORMATION	☐ SIDETRACK TO REPAIR WELL	☐ TEMPORARY ABANDON
	☐ TUBING REPAIR	☐ VENT OR FLARE	☐ WATER DISPOSAL
☐ DRILLING REPORT Report Date:	☐ WATER SHUTOFF	☐ SI TA STATUS EXTENSION	☐ APD EXTENSION
	☐ WILDCAT WELL DETERMINATION	☐ OTHER	OTHER:

12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc.

MIRU TRIPLE A BUCKET RIG. DRILLED 20" CONDUCTOR HOLE TO 40'. RAN 14" 36.7# SCHEDULE 10 CONDUCTOR PIPE. CMT W/28 SX READY MIX. SPUD WELL LOCATION ON APRIL 19, 2012 AT 0100 HRS.

Accepted by the
Utah Division of
Oil, Gas and Mining
FOR RECORD ONLY
May 02, 2012

NAME (PLEASE PRINT)	PHONE NUMBER	TITLE
Gina Becker	720 929-6086	Regulatory Analyst II
SIGNATURE		**DATE**
N/A		4/25/2012

RECEIVED: Apr. 25, 2012

STATE OF UTAH
DEPARTMENT OF NATURAL RESOURCES
DIVISION OF OIL, GAS AND MINING

FORM 6

ENTITY ACTION FORM

Operator: KERR McGEE OIL & GAS ONSHORE LP
Operator Account Number: N 2995
Address: P.O. BOX 173779
city DENVER
state CO zip 80217
Phone Number: (720) 929-6086

Well 1

API Number	Well Name		QQ	Sec	Twp	Rng	County
4304752075	BONANZA 1023-5M1AS		SWSW	5	10S	23E	UINTAH
Action Code	**Current Entity Number**	**New Entity Number**	**Spud Date**			**Entity Assignment Effective Date**	
A	99999	19509	4/18/2012			4/30/2012	

Comments: MIRU TRIPPLE A BUCKET RIG.
SPUD WELL ON 04/18/2012 AT 1830 HRS. WSMVD

Well 2

API Number	Well Name		QQ	Sec	Twp	Rng	County
4304752076	BONANZA 1023-5M1CS		SWSW	5	10S	23E	UINTAH
Action Code	**Current Entity Number**	**New Entity Number**	**Spud Date**			**Entity Assignment Effective Date**	
A	99999	19509	4/18/2012			4/30/2012	

Comments: MIRU TRIPPLE A BUCKET RIG.
SPUD WELL ON 04/18/2012 AT 2130 HRS. WSMVD SWSW

Well 3

API Number	Well Name		QQ	Sec	Twp	Rng	County
4304752077	BONANZA 1023-5M3BS		SWSW	5	10S	23E	UINTAH
Action Code	**Current Entity Number**	**New Entity Number**	**Spud Date**			**Entity Assignment Effective Date**	
A	99999	19510	4/19/2012			4/30/2012	

Comments: MIRU TRIPPLE A BUCKET RIG.
SPUD WELL ON 04/19/2012 AT 0100 HRS. WSMVD

ACTION CODES:

- **A** - Establish new entity for new well (single well only)
- **B** - Add new well to existing entity (group or unit well)
- **C** - Re-assign well from one existing entity to another existing entity
- **D** - Re-assign well from one existing entity to a new entity
- **E** - Other (Explain in 'comments' section)

GINA BECKER
Name (Please Print)
Signature
SR. REGULATORY ANALYST 4/25/2012
Title **Date**

RECEIVED
APR 27 2012
Div. of Oil, Gas & Mining

(5/2000)

STATE OF UTAH
DEPARTMENT OF NATURAL RESOURCES
DIVISION OF OIL, GAS, AND MINING

FORM 9

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.

5.LEASE DESIGNATION AND SERIAL NUMBER: UTU73450

6. IF INDIAN, ALLOTTEE OR TRIBE NAME:

7.UNIT or CA AGREEMENT NAME:

1. TYPE OF WELL Gas Well

8. WELL NAME and NUMBER: BONANZA 1023-5M3BS

2. NAME OF OPERATOR: KERR-MCGEE OIL & GAS ONSHORE, L.P.

9. API NUMBER: 43047520770000

3. ADDRESS OF OPERATOR: P.O. Box 173779 1099 18th Street, Suite 600, Denver, CO, 80217 3779

PHONE NUMBER: 720 929-6526

9. FIELD and POOL or WILDCAT: NATURAL BUTTES

4. LOCATION OF WELL
FOOTAGES AT SURFACE: 0205 FSL 1001 FWL
QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN: Qtr/Qtr: SWSW Section: 05 Township: 10.0S Range: 23.0E Meridian: S

COUNTY: UINTAH

STATE: UTAH

11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION		
☐ NOTICE OF INTENT Approximate date work will start:	☐ ACIDIZE	☐ ALTER CASING	☐ CASING REPAIR
☐ SUBSEQUENT REPORT Date of Work Completion:	☐ CHANGE TO PREVIOUS PLANS	☐ CHANGE TUBING	☐ CHANGE WELL NAME
☐ SPUD REPORT Date of Spud:	☐ CHANGE WELL STATUS	☐ COMMINGLE PRODUCING FORMATIONS	☐ CONVERT WELL TYPE
✓ DRILLING REPORT Report Date: 5/6/2012	☐ DEEPEN	☐ FRACTURE TREAT	☐ NEW CONSTRUCTION
	☐ OPERATOR CHANGE	☐ PLUG AND ABANDON	☐ PLUG BACK
	☐ PRODUCTION START OR RESUME	☐ RECLAMATION OF WELL SITE	☐ RECOMPLETE DIFFERENT FORMATION
	☐ REPERFORATE CURRENT FORMATION	☐ SIDETRACK TO REPAIR WELL	☐ TEMPORARY ABANDON
	☐ TUBING REPAIR	☐ VENT OR FLARE	☐ WATER DISPOSAL
	☐ WATER SHUTOFF	☐ SI TA STATUS EXTENSION	☐ APD EXTENSION
	☐ WILDCAT WELL DETERMINATION	☐ OTHER	OTHER:

12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc.

MIRU AIR RIG ON 5/3/2012. DRILLED SURFACE HOLE TO 2452'. RAN SURFACE CASING AND CEMENTED. WELL IS WAITING ON ROTARY RIG. DETAILS OF CEMENT JOB WILL BE INCLUDED WITH WELL COMPLETION REPORT.

Accepted by the Utah Division of Oil, Gas and Mining
FOR RECORD ONLY
May 09, 2012

NAME (PLEASE PRINT)	PHONE NUMBER	TITLE
Cara Mahler	720 929-6029	Regulatory Analyst I
SIGNATURE N/A		**DATE** 5/9/2012

RECEIVED: May. 09, 2012

FEDERAL APPROVAL OF THIS ACTION IS NECESSARY

STATE OF UTAH
DEPARTMENT OF NATURAL RESOURCES
DIVISION OF OIL, GAS, AND MINING

FORM 9

5.LEASE DESIGNATION AND SERIAL NUMBER:
UTU73450

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.

6. IF INDIAN, ALLOTTEE OR TRIBE NAME:

7.UNIT or CA AGREEMENT NAME:

1. TYPE OF WELL
Gas Well

8. WELL NAME and NUMBER:
BONANZA 1023-5M3BS

2. NAME OF OPERATOR:
KERR-MCGEE OIL & GAS ONSHORE, L.P.

9. API NUMBER:
43047520770000

3. ADDRESS OF OPERATOR:
P.O. Box 173779 1099 18th Street, Suite 600, Denver, CO, 80217 3779

PHONE NUMBER:
720 929-6526

9. FIELD and POOL or WILDCAT:
NATURAL BUTTES

4. LOCATION OF WELL
FOOTAGES AT SURFACE:
0205 FSL 1001 FWL
QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN:
Qtr/Qtr: SWSW Section: 05 Township: 10.0S Range: 23.0E Meridian: S

COUNTY:
UINTAH

STATE:
UTAH

11.
CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION		
✓ NOTICE OF INTENT Approximate date work will start: 5/8/2012	☐ ACIDIZE	☐ ALTER CASING	☐ CASING REPAIR
	✓ CHANGE TO PREVIOUS PLANS	☐ CHANGE TUBING	☐ CHANGE WELL NAME
	☐ CHANGE WELL STATUS	☐ COMMINGLE PRODUCING FORMATIONS	☐ CONVERT WELL TYPE
☐ SUBSEQUENT REPORT Date of Work Completion:	☐ DEEPEN	☐ FRACTURE TREAT	☐ NEW CONSTRUCTION
	☐ OPERATOR CHANGE	☐ PLUG AND ABANDON	☐ PLUG BACK
☐ SPUD REPORT Date of Spud:	☐ PRODUCTION START OR RESUME	☐ RECLAMATION OF WELL SITE	☐ RECOMPLETE DIFFERENT FORMATION
	☐ REPERFORATE CURRENT FORMATION	☐ SIDETRACK TO REPAIR WELL	☐ TEMPORARY ABANDON
	☐ TUBING REPAIR	☐ VENT OR FLARE	☐ WATER DISPOSAL
☐ DRILLING REPORT Report Date:	☐ WATER SHUTOFF	☐ SI TA STATUS EXTENSION	☐ APD EXTENSION
	☐ WILDCAT WELL DETERMINATION	☐ OTHER	OTHER:

12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc.

THE OPERATOR REQUESTS APPROVAL FOR A FIT WAIVER, A CLOSED LOOP DRILLING OPTION, AND A PRODUCTION CASING CHANGE. ALL OTHER ASPECTS OF THE PREVIOUSLY APPROVED DRILLING PLAN WILL NOT CHANGE. PLEASE SEE THE ATTACHMENT. THANK YOU.

Accepted by the Utah Division of Oil, Gas and Mining

Date: May 24, 2012

By: Dark K Quist

NAME (PLEASE PRINT)	PHONE NUMBER	TITLE
Cara Mahler	720 929-6029	Regulatory Analyst I
SIGNATURE		**DATE**
N/A		5/14/2012

RECEIVED: May. 14, 2012

Kerr-McGee Oil & Gas Onshore. L.P.

BONANZA 1023-5M3BS

Surface: 205 FSL / 1001 FWL SWSW
BHL: 566 FSL / 240 FWL SWSW

Section 5 T10S R23E

Uintah County, Utah
Mineral Lease: UTU-73450

ONSHORE ORDER NO. 1

DRILLING PROGRAM

1. & 2. **Estimated Tops of Important Geologic Markers:**
Estimated Depths of Anticipated Water, Oil, Gas, or Mineral Formations:

Formation	Depth	Resource
Uinta	0 - Surface	
Green River	1,231'	
Birds Nest	1,498'	Water
Mahogany	1,844'	Water
Wasatch	4,209'	Gas
Mesaverde	6,328'	Gas
Sego	8,457'	Gas
TVD	8,457'	
TD	8,575'	

3. **Pressure Control Equipment** (Schematic Attached)

Please refer to the attached Drilling Program

4. **Proposed Casing & Cementing Program:**

Please refer to the attached Drilling Program

5. **Drilling Fluids Program:**

Please refer to the attached Drilling Program

6. **Evaluation Program:**

Please refer to the attached Drilling Program

RECEIVED: May. 14, 2012

7. Abnormal Conditions:

Maximum anticipated bottom hole pressure calculated at 8457' TVD, approximately equals 5,412 psi 0.64 psi/ft = actual bottomhole gradient

Maximum Anticipated Bottom Hole Pressure (MABHP) = Pore Pressure at TD

Maximum anticipated surface pressure equals approximately 3,540 psi (bottom hole pressure minus the pressure of a partially evacuated hole calculated at 0.22 psi/foot, per Onshore Order No. 2).

Per Onshore Order No. 2 - Max Anticipated Surf. Press.(MASP) = (Pore Pressure at next csg point-
(0.22 psi/ft-partial evac gradient x TVD of next csg point))

8. Anticipated Starting Dates:

Drilling is planned to commence immediately upon approval of this application.

9. Variances:

Please refer to the attached Drilling Program.
Onshore Order #2 – Air Drilling Variance

Kerr-McGee Oil & Gas Onshore LP (KMG) respectfully requests a variance to several requirements associated with air drilling outlined in Onshore Order 2

- Blowout Prevention Equipment (BOPE) requirements;
- Mud program requirements; and
- Special drilling operation (surface equipment placement) requirements associated with air drilling.

This Standard Operating Practices addendum provides supporting information as to why KMG current air drilling practices for constructing the surface casing hole should be granted a variance to Onshore Order 2 air drilling requirements.

The reader should note that the air rig is used only to construct a stable surface casing hole through a historically difficult lost circulation zone. A conventional rotary rig follows the air rig, and is used to drill and construct the majority of the wellbore.

More notable, KMG has used the air rig layout and procedures outlined below to drill the surface casing hole in approximately 675 wells without incident of blow out or loss of life.

Background

In a typical well, KMG utilizes an air rig for drilling the surface casing hole, an interval from the surface to surface casing depths, which varies in depth from 1,700 to 2,800 feet. The air rig drilling operation does not drill through productive or over pressured formations in KMG field, but does penetrate the Uinta and Green River Formations. The purpose of the air drilling operation is to overcome the severe loss circulation zone in the Green River known as the Bird's Nest while creating a stable hole for the surface casing. The surface casing hole is generally drilled to approximately 500 feet below the Bird's Nest.

RECEIVED: May. 14, 2012

Before the surface air rig is mobilized, a rathole rig is utilized to set and cement conductor pipe through a competent surface formation. Generally, the conductor is set at 40 feet. In some cases, conductor may be set deeper in areas that the surface formation is not found competent. This rig also drills the rat and mouse holes in preparation for the surface casing and production string drilling operations.

The air rig is then mobilized to drill the surface casing hole by drilling a 12 1/4 inch hole for the first 200 feet, then will drill a 11inch hole to just above the Bird's Nest interval with an air hammer. The hammer is then tripped and replaced with a 11 inch tri-cone bit. The tri-cone bit is used to drill to the surface casing point, approximately 500 feet below the loss circulation zone (Bird's Nest). The 8-5/8 inch surface casing is then run and cemented in place, thereby isolating the lost circulation zone.

KMG fully appreciates Onshore Order 2 well control and safety requirements associated with a typical air drilling operations. However, the requirements of Onshore Order 2 are excessive with respect to the air rig layout and drilling operation procedures that are currently in practice to drill and control the surface casing hole in KMG Fields.

Variance for BOPE Requirements
The air rig operation utilizes a properly lubricated and maintained air bowl diverter system which diverts the drilling returns to a six-inch blooie line. The air bowl is the only piece of BOPE equipment which is installed during drilling operations and is sufficient to contain the air returns associated with this drilling operation. As was discussed earlier, the drilling of the surface hole does not encounter any over pressured or productive zones, and as a result standard BOPE equipment should not be required. In addition, standard drilling practices do not support the use of BOPE on 40 feet of conductor pipe.

Variance for Mud Material Requirements
Onshore Order 2 also states that sufficient quantities of mud materials shall be maintained or readily accessible for the purpose of assuring adequate well control. Once again, the surface hole drilling operations does not encounter over pressured or productive intervals, and as a result there is not a need to control pressure in the surface hole with a mud system. Instead of mud, the air rigs utilize water from the reserve pit for well control, if necessary. A skid pump which is located near the reserve pit (see attachment) will supply the water to the well bore.

Variance for Special Drilling Operation (surface equipment placement) Requirements
Onshore Order 2 requires specific safety distances or setbacks for the placement of associated standard air drilling equipment, wellbore, and reserve pits. The air rigs used to drill the surface holes are not typical of an air rig used to drill a producing hole in other parts of the US. These are smaller in nature and designed to fit a KMG location. The typical air rig layout for drilling surface hole in the field is attached.

Typically the blooie line discharge point is required to be 100 feet from the well bore. In the case of a KMG well, the reserve pit is only 45 feet from the rig and is used for the drill cuttings. The blooie line, which transports the drill cuttings from the well to the reserve pit, subsequently discharges only 45 feet from the well bore.

Typically the air rig compressors are required to be located in the opposite direction from the blooie line and a minimum of 100 feet from the well bore. At the KMG locations, the air rig compressors are approximately 40 feet from the well bore and approximately 60 feet from the blooie line discharge due to the unique air rig design. The air compressors (see attachment) are located on the rig (1250 cfm) and

on a standby trailer (1170 cfm). A booster sits between the two compressors and boosts the output from 350 psi to 2000 psi. The design does put the booster and standby compressor opposite from the blooie line.

Lastly, Onshore Order 2 addresses the need for an automatic igniter or continuous pilot light on the blooie line. The air rig does not utilize an igniter as the surface hole drilling operation does not encounter productive formations.

Variance for FIT Requirements
KMG also respectfully requests a variance to Onshore Order 2, Section III, Part Bi, for the pressure integrity test (PIT, also known as a formation integrity test (FIT)). This well is not an exploratory well and is being drilled in an area where the formation integrity is well known. Additionally, when an FIT is run with the mud weight as required, the casing shoe frequently breaks down and causes subsequent lost circulation when drilling the entire depth of the well.

Conclusion
The air rig operating procedures and the attached air rig layout have effectively maintained well control while drilling the surface holes in KMG Fields. KMG respectfully requests a variance from Onshore Order 2 with respect to air drilling well control requirements as discussed above.

10. Other Information:

Please refer to the attached Drilling Program.

KERR-McGEE OIL & GAS ONSHORE LP

DRILLING PROGRAM

COMPANY NAME	KERR-McGEE OIL & GAS ONSHORE LP		DATE	May 7, 2012	
WELL NAME	**BONANZA 1023-5M3BS**		TD	8,457' TVD	8,575' MD
FIELD	Natural Buttes	COUNTY Uintah	STATE Utah	FINISHED ELEVATION	5295.4
SURFACE LOCATION	SWSW 205 FSL	1001 FWL	Sec 5	T 10S	R 23E
	Latitude: 39.971262	Longitude: -109.356545		NAD 83	
BTM HOLE LOCATION	SWSW 566 FSL	240 FWL	Sec 5	T 10S	R 23E
	Latitude: 39.972249	Longitude: -109.359262		NAD 83	
OBJECTIVE ZONE(S)	Wasatch/Mesaverde				
ADDITIONAL INFO	Regulatory Agencies: BLM (Minerals), BLM (Surface), UDOGM Tri-County Health Dept.				

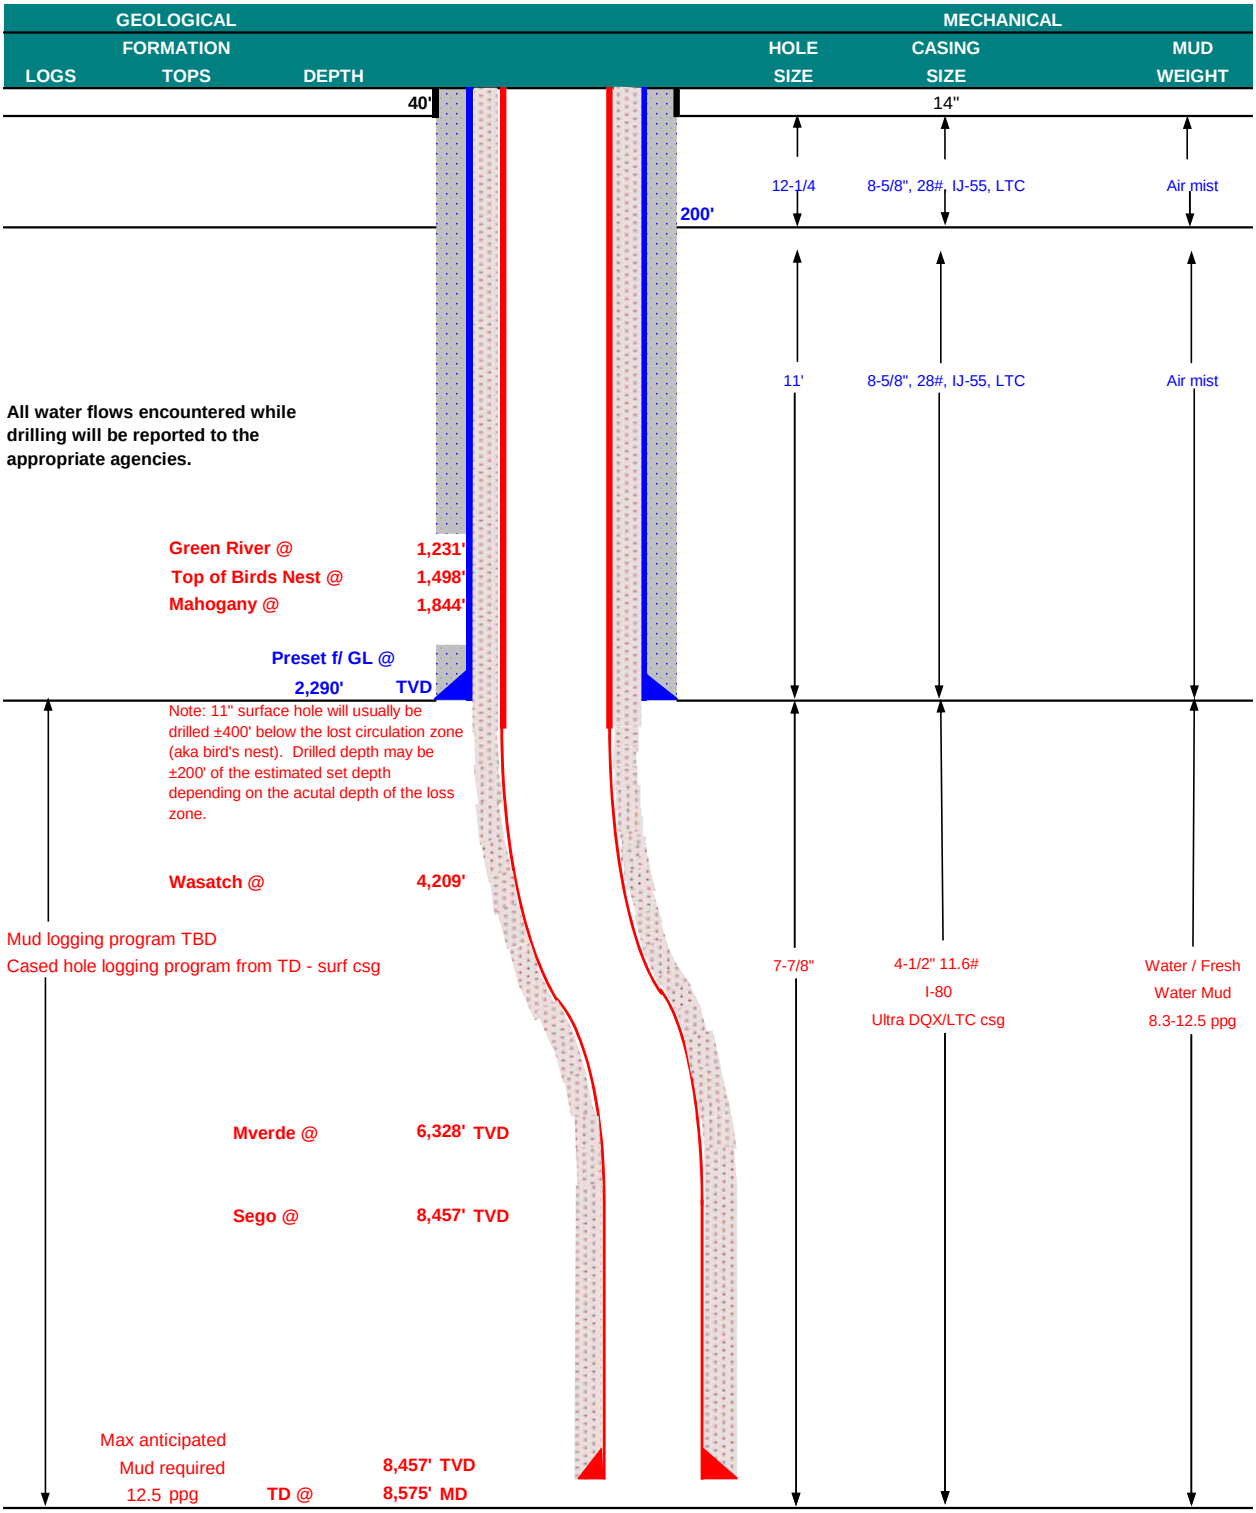

KERR-McGEE OIL & GAS ONSHORE LP

DRILLING PROGRAM

CASING PROGRAM

	SIZE	INTERVAL			WT.	GR.	CPLG.	DESIGN FACTORS BURST	COLLAPSE	LTC	DQX TENSION
CONDUCTOR	14"	0-40'									
								3,390	1,880	348,000	N/A
SURFACE	8-5/8"	0	to	2,290	28.00	IJ-55	LTC	2.36	1.75	6.20	N/A
								7,780	6,350	223,000	267,035
PRODUCTION	4-1/2"	0	to	5,000	11.60	I-80	DQX	1.11	1.16		3.32
								7,780	6,350	223,000	267,035
	4-1/2"	5,000	to	8,575'	11.60	I-80	LTC	1.11	1.16	6.65	

Surface Casing:

(Burst Assumptions: TD = 12.5 ppg) 0.73 psi/ft = frac gradient @ surface shoe

Fracture at surface shoe with 0.1 psi/ft gas gradient above

(Collapse Assumption: Fully Evacuated Casing, Max MW) (Tension Assumptions: Air Weight of Casing*Buoy.Fact. of water)

Production casing:

(Burst Assumptions: Pressure test with 8.4ppg @ 7000 psi) 0.64 psi/ft = bottomhole gradient

(Collapse Assumption: Fully Evacuated Casing, Max MW) (Tension Assumptions: Air Weight of Casing*Buoy.Fact. of water)

CEMENT PROGRAM

		FT. OF FILL	DESCRIPTION	SACKS	EXCESS	WEIGHT	YIELD
SURFACE	LEAD	500'	Premium cmt + 2% CaCl	180	60%	15.80	1.15
Option 1			+ 0.25 pps flocele				
	TOP OUT CMT (6 jobs)	1,200'	20 gals sodium silicate + Premium cmt	270	0%	15.80	1.15
			+ 2% CaCl + 0.25 pps flocele				
SURFACE			**NOTE: If well will circulate water to surface, option 2 will be utilized**				
Option 2	LEAD	1,790'	65/35 Poz + 6% Gel + 10 pps gilsonite	170	35%	11.00	3.82
			+ 0.25 pps Flocele + 3% salt BWOW				
	TAIL	500'	Premium cmt + 2% CaCl	150	35%	15.80	1.15
			+ 0.25 pps flocele				
	TOP OUT CMT	as required	Premium cmt + 2% CaCl	as req.		15.80	1.15
PRODUCTION	LEAD	3,705'	Premium Lite II +0.25 pps	290	35%	12.00	3.38
			celloflake + 5 pps gilsonite + 10% gel				
			+ 0.5% extender				
	TAIL	4,870'	50/50 Poz/G + 10% salt + 2% gel	1,150	35%	14.30	1.31
			+ 0.1% R-3				

*Substitute caliper hole volume plus 0% excess for LEAD if accurate caliper is obtained

*Substitute caliper hole volume plus 10% excess for TAIL if accurate caliper is obtained

FLOAT EQUIPMENT & CENTRALIZERS

SURFACE	Guide shoe, 1 jt, insert float. Centralize first 3 joints with bow spring centralizers. Thread lock guide shoe
PRODUCTION	Float shoe, 1 jt, float collar. 15 centralizers for a Mesaverde and 20 for a Blackhawk well. 1 centralizer on the first 3 joints and one every third joint thereafter.

ADDITIONAL INFORMATION

Test casing head to 750 psi after installing. Test surface casing to 1,500 psi prior to drilling out.

BOPE: 11" 5M with one annular and 2 rams. The BOPE will be installed before the production hole is drilled and tested to 5,000 psi (annular to 2,500 psi) prior to drilling out the surface casing shoe. Record on chart recorder and tour sheet. Function test rams on each trip. Maintain safety valve and inside BOP on rig floor at all times. Most rigs have top drives; however, if used, the Kelly is to be equipped with upper and lower kelly valves.

Surveys will be taken at 1,000' minimum intervals.

Most rigs have PVT System for mud monitoring. If no PVT is available, visual monitoring will be utilized.

DRILLING ENGINEER: _____ **DATE:** _____

Nick Spence / Danny Showers / Chad Loesel

DRILLING SUPERINTENDENT: _____ **DATE:** _____

Kenny Gathings / Lovel Young

RECEIVED: May. 14, 2012

EXHIBIT A
BONANZA 1023-5M3BS

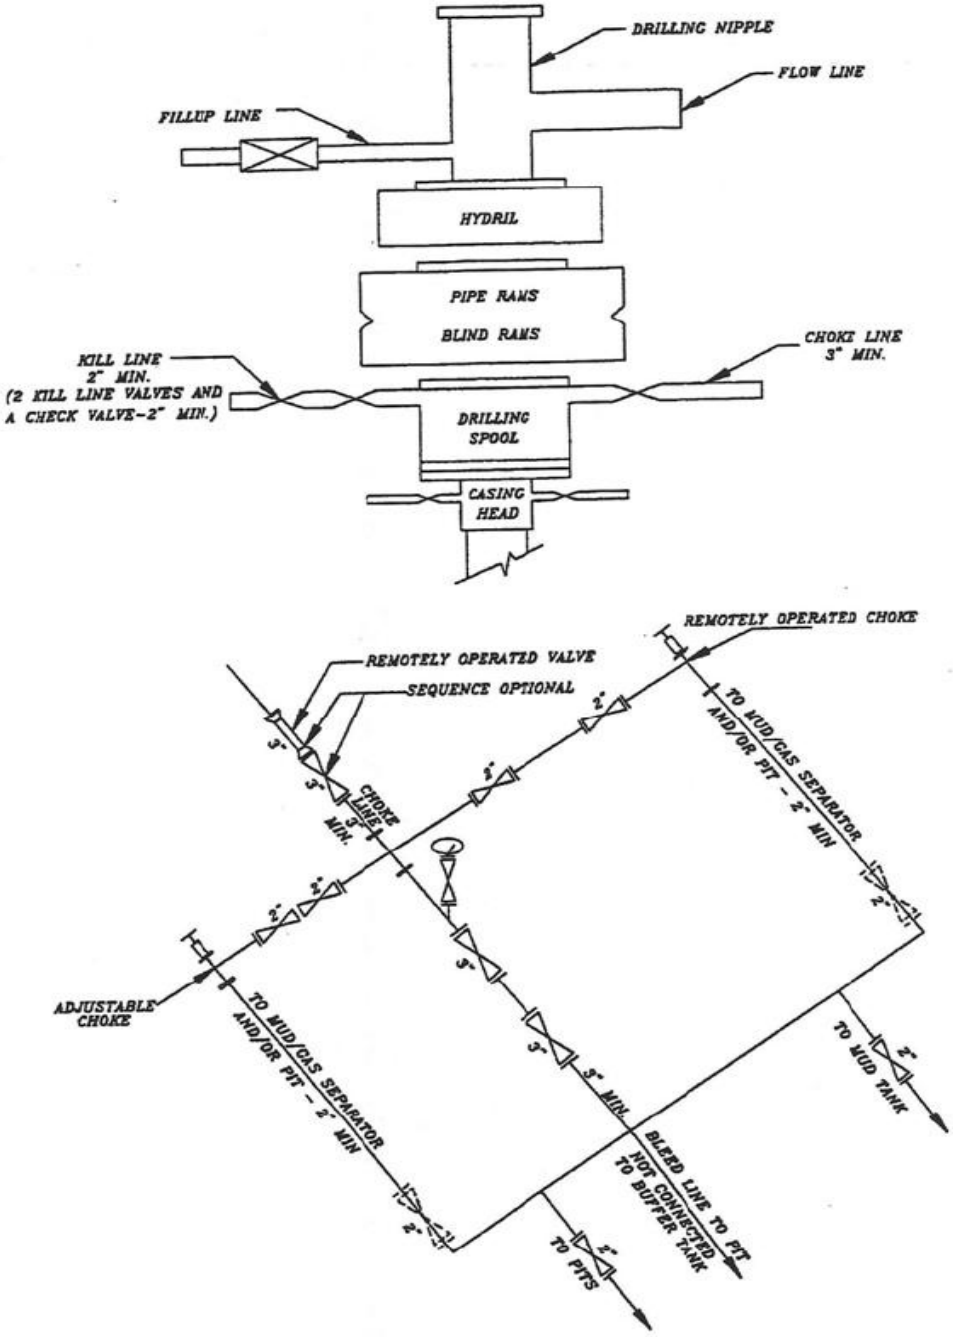

SCHEMATIC DIAGRAM OF 5,000 PSI BOP STACK

Requested Drilling Options:

Kerr-McGee will use either a closed loop drilling system that will require one pit and one cuttings storage area to be constructed on the drilling pad or a traditional drilling operation with one pit used for drilling and completion operations. The cuttings storage area will be used to contain only the de-watered drill cuttings and will be lined and bermed to prevent any liquid runoff. The drill cuttings will be buried in the completion pit once completion operations are completed according to traditional pit closure standards. The pit will be constructed to allow for completion operations. The completion operations pit will be lined with a synthetic material 20 mil or thicker and will be used for the completing of the wells on the pad or used as part of our Aandarko Completions Transportation System (ACTS). Using the closed loop drilling system will allow Kerr-McGee to decrease the amount of disturbance/footprint on location compared to a single large drilling/completions pit.

If Kerr-McGee does not use a closed loop drilling system, it will construct a traditional drilling/completions pit to contain drill cuttings and for use in completion operations. The pit will be lined with a synthetic material 20 mil or thicker. The drill cuttings will be buried in the pit using traditional pit closure standards.

RECEIVED: May. 14, 2012

STATE OF UTAH
DEPARTMENT OF NATURAL RESOURCES
DIVISION OF OIL, GAS, AND MINING

FORM 9

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.

5.LEASE DESIGNATION AND SERIAL NUMBER: UTU73450

6. IF INDIAN, ALLOTTEE OR TRIBE NAME:

7.UNIT or CA AGREEMENT NAME:

1. TYPE OF WELL Gas Well

8. WELL NAME and NUMBER: BONANZA 1023-5M3BS

2. NAME OF OPERATOR: KERR-MCGEE OIL & GAS ONSHORE, L.P.

9. API NUMBER: 43047520770000

3. ADDRESS OF OPERATOR: P.O. Box 173779 1099 18th Street, Suite 600, Denver, CO, 80217 3779 **PHONE NUMBER:** 720 929-6526

9. FIELD and POOL or WILDCAT: NATURAL BUTTES

4. LOCATION OF WELL
FOOTAGES AT SURFACE: 0205 FSL 1001 FWL
QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN: Qtr/Qtr: SWSW Section: 05 Township: 10.0S Range: 23.0E Meridian: S

COUNTY: UINTAH

STATE: UTAH

11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION		
☐ NOTICE OF INTENT Approximate date work will start:	☐ ACIDIZE	☐ ALTER CASING	☐ CASING REPAIR
☐ SUBSEQUENT REPORT Date of Work Completion:	☐ CHANGE TO PREVIOUS PLANS	☐ CHANGE TUBING	☐ CHANGE WELL NAME
☐ SPUD REPORT Date of Spud:	☐ CHANGE WELL STATUS	☐ COMMINGLE PRODUCING FORMATIONS	☐ CONVERT WELL TYPE
✓ DRILLING REPORT Report Date: 6/21/2012	☐ DEEPEN	☐ FRACTURE TREAT	☐ NEW CONSTRUCTION
	☐ OPERATOR CHANGE	☐ PLUG AND ABANDON	☐ PLUG BACK
	☐ PRODUCTION START OR RESUME	☐ RECLAMATION OF WELL SITE	☐ RECOMPLETE DIFFERENT FORMATION
	☐ REPERFORATE CURRENT FORMATION	☐ SIDETRACK TO REPAIR WELL	☐ TEMPORARY ABANDON
	☐ TUBING REPAIR	☐ VENT OR FLARE	☐ WATER DISPOSAL
	☐ WATER SHUTOFF	☐ SI TA STATUS EXTENSION	☐ APD EXTENSION
	☐ WILDCAT WELL DETERMINATION	☐ OTHER	OTHER:

12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc.

MIRU ROTARY RIG. FINISHED DRILLING FROM 2452' TO 8580' ON 6/18/2012. RAN 4-1/2" 11.6# I-80 PRODUCTION CASING. CEMENTED PRODUCTION CASING. RELEASED ENSIGN 138 RIG ON 6/21/2012 @ 7:30 HRS. DETAILS OF CEMENT JOB WILL BE INCLUDED WITH THE WELL COMPLETION REPORT. WELL IS WAITING ON FINAL COMPLETION ACTIVITIES.

Accepted by the Utah Division of Oil, Gas and Mining
FOR RECORD ONLY
June 25, 2012

NAME (PLEASE PRINT)	PHONE NUMBER	TITLE
Cara Mahler	720 929-6029	Regulatory Analyst I
SIGNATURE N/A		**DATE** 6/25/2012

RECEIVED: Jun. 25, 2012

STATE OF UTAH
DEPARTMENT OF NATURAL RESOURCES
DIVISION OF OIL, GAS, AND MINING

FORM 9

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.

5.LEASE DESIGNATION AND SERIAL NUMBER: UTU73450

6. IF INDIAN, ALLOTTEE OR TRIBE NAME:

7.UNIT or CA AGREEMENT NAME:

1. TYPE OF WELL Gas Well

8. WELL NAME and NUMBER: BONANZA 1023-5M3BS

2. NAME OF OPERATOR: KERR-MCGEE OIL & GAS ONSHORE, L.P.

9. API NUMBER: 43047520770000

3. ADDRESS OF OPERATOR: P.O. Box 173779 1099 18th Street, Suite 600, Denver, CO, 80217 3779

PHONE NUMBER: 720 929-6526

9. FIELD and POOL or WILDCAT: NATURAL BUTTES

4. LOCATION OF WELL
FOOTAGES AT SURFACE: 0205 FSL 1001 FWL
QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN: Qtr/Qtr: SWSW Section: 05 Township: 10.0S Range: 23.0E Meridian: S

COUNTY: UINTAH

STATE: UTAH

11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION		
☐ NOTICE OF INTENT Approximate date work will start:	☐ ACIDIZE	☐ ALTER CASING	☐ CASING REPAIR
☐ SUBSEQUENT REPORT Date of Work Completion:	☐ CHANGE TO PREVIOUS PLANS	☐ CHANGE TUBING	☐ CHANGE WELL NAME
☐ SPUD REPORT Date of Spud:	☐ CHANGE WELL STATUS	☐ COMMINGLE PRODUCING FORMATIONS	☐ CONVERT WELL TYPE
✓ DRILLING REPORT Report Date: 8/2/2012	☐ DEEPEN	☐ FRACTURE TREAT	☐ NEW CONSTRUCTION
	☐ OPERATOR CHANGE	☐ PLUG AND ABANDON	☐ PLUG BACK
	☐ PRODUCTION START OR RESUME	☐ RECLAMATION OF WELL SITE	☐ RECOMPLETE DIFFERENT FORMATION
	☐ REPERFORATE CURRENT FORMATION	☐ SIDETRACK TO REPAIR WELL	☐ TEMPORARY ABANDON
	☐ TUBING REPAIR	☐ VENT OR FLARE	☐ WATER DISPOSAL
	☐ WATER SHUTOFF	☐ SI TA STATUS EXTENSION	☐ APD EXTENSION
	☐ WILDCAT WELL DETERMINATION	☐ OTHER	OTHER:

12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc.

No activity for the month of July 2012. Well TD at 8,580'.

Accepted by the
Utah Division of
Oil, Gas and Mining
FOR RECORD ONLY
August 08, 2012

NAME (PLEASE PRINT)	PHONE NUMBER	TITLE
Cara Mahler	720 929-6029	Regulatory Analyst I
SIGNATURE		**DATE**
N/A		8/2/2012

STATE OF UTAH
DEPARTMENT OF NATURAL RESOURCES
DIVISION OF OIL, GAS, AND MINING

FORM 9

5.LEASE DESIGNATION AND SERIAL NUMBER:
UTU73450

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.

6. IF INDIAN, ALLOTTEE OR TRIBE NAME:

7.UNIT or CA AGREEMENT NAME:

1. TYPE OF WELL
Gas Well

8. WELL NAME and NUMBER:
BONANZA 1023-5M3BS

2. NAME OF OPERATOR:
KERR-MCGEE OIL & GAS ONSHORE, L.P.

9. API NUMBER:
43047520770000

3. ADDRESS OF OPERATOR:
P.O. Box 173779 1099 18th Street, Suite 600, Denver, CO, 80217 3779

PHONE NUMBER:
720 929-6526

9. FIELD and POOL or WILDCAT:
NATURAL BUTTES

4. LOCATION OF WELL
FOOTAGES AT SURFACE:
0205 FSL 1001 FWL
QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN:
Qtr/Qtr: SWSW Section: 05 Township: 10.0S Range: 23.0E Meridian: S

COUNTY:
UINTAH

STATE:
UTAH

11.
CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION		
☐ NOTICE OF INTENT Approximate date work will start:	☐ ACIDIZE	☐ ALTER CASING	☐ CASING REPAIR
☐ SUBSEQUENT REPORT Date of Work Completion:	☐ CHANGE TO PREVIOUS PLANS	☐ CHANGE TUBING	☐ CHANGE WELL NAME
☐ SPUD REPORT Date of Spud:	☐ CHANGE WELL STATUS	☐ COMMINGLE PRODUCING FORMATIONS	☐ CONVERT WELL TYPE
✓ DRILLING REPORT Report Date: 9/4/2012	☐ DEEPEN	☐ FRACTURE TREAT	☐ NEW CONSTRUCTION
	☐ OPERATOR CHANGE	☐ PLUG AND ABANDON	☐ PLUG BACK
	☐ PRODUCTION START OR RESUME	☐ RECLAMATION OF WELL SITE	☐ RECOMPLETE DIFFERENT FORMATION
	☐ REPERFORATE CURRENT FORMATION	☐ SIDETRACK TO REPAIR WELL	☐ TEMPORARY ABANDON
	☐ TUBING REPAIR	☐ VENT OR FLARE	☐ WATER DISPOSAL
	☐ WATER SHUTOFF	☐ SI TA STATUS EXTENSION	☐ APD EXTENSION
	☐ WILDCAT WELL DETERMINATION	☐ OTHER	OTHER:

12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc.

Started completing the well in August 2012. Well TD at 8,580

Accepted by the
Utah Division of
Oil, Gas and Mining
FOR RECORD ONLY
September 07, 2012

NAME (PLEASE PRINT)	PHONE NUMBER	TITLE
Lindsey Frazier	720 929-6857	Regulatory Analyst II
SIGNATURE		**DATE**
N/A		9/4/2012

STATE OF UTAH
DEPARTMENT OF NATURAL RESOURCES
DIVISION OF OIL, GAS, AND MINING

FORM 9

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.

5.LEASE DESIGNATION AND SERIAL NUMBER: UTU73450

6. IF INDIAN, ALLOTTEE OR TRIBE NAME:

7.UNIT or CA AGREEMENT NAME: PONDEROSA

1. TYPE OF WELL Gas Well

8. WELL NAME and NUMBER: BONANZA 1023-5M3BS

2. NAME OF OPERATOR: KERR-MCGEE OIL & GAS ONSHORE, L.P.

9. API NUMBER: 43047520770000

3. ADDRESS OF OPERATOR: P.O. Box 173779 1099 18th Street, Suite 600, Denver, CO, 80217 3779 **PHONE NUMBER:** 720 929-6526

9. FIELD and POOL or WILDCAT: NATURAL BUTTES

4. LOCATION OF WELL
FOOTAGES AT SURFACE: 0205 FSL 1001 FWL
QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN: Qtr/Qtr: SWSW Section: 05 Township: 10.0S Range: 23.0E Meridian: S

COUNTY: UINTAH

STATE: UTAH

11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION		
☐ NOTICE OF INTENT Approximate date work will start:	☐ ACIDIZE	☐ ALTER CASING	☐ CASING REPAIR
☐ SUBSEQUENT REPORT Date of Work Completion:	☐ CHANGE TO PREVIOUS PLANS	☐ CHANGE TUBING	☐ CHANGE WELL NAME
☐ SPUD REPORT Date of Spud:	☐ CHANGE WELL STATUS	☐ COMMINGLE PRODUCING FORMATIONS	☐ CONVERT WELL TYPE
✓ DRILLING REPORT Report Date: 9/14/2012	☐ DEEPEN	☐ FRACTURE TREAT	☐ NEW CONSTRUCTION
	☐ OPERATOR CHANGE	☐ PLUG AND ABANDON	☐ PLUG BACK
	✓ PRODUCTION START OR RESUME	☐ RECLAMATION OF WELL SITE	☐ RECOMPLETE DIFFERENT FORMATION
	☐ REPERFORATE CURRENT FORMATION	☐ SIDETRACK TO REPAIR WELL	☐ TEMPORARY ABANDON
	☐ TUBING REPAIR	☐ VENT OR FLARE	☐ WATER DISPOSAL
	☐ WATER SHUTOFF	☐ SI TA STATUS EXTENSION	☐ APD EXTENSION
	☐ WILDCAT WELL DETERMINATION	☐ OTHER	OTHER:

12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc.

THE SUBJECT WELL WAS PLACED ON PRODUCTION ON 09/14/2012. THE CHRONOLOGICAL WELL HISTORY WILL BE SUBMITTED WITH THE WELL COMPLETION REPORT

Accepted by the Utah Division of Oil, Gas and Mining
FOR RECORD ONLY
September 18, 2012

NAME (PLEASE PRINT)	PHONE NUMBER	TITLE
Lindsey Frazier	720 929-6857	Regulatory Analyst II
SIGNATURE N/A		**DATE** 9/18/2012

RECEIVED: Sep. 18, 2012

Form 3160-4
(August 2007)

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FORM APPROVED
OMB No. 1004-0137
Expires: July 31, 2010

WELL COMPLETION OR RECOMPLETION REPORT AND LOG

5. Lease Serial No. UTU73450

1a. Type of Well ☐ Oil Well ☒ Gas Well ☐ Dry ☐ Other
b. Type of Completion ☒ New Well ☐ Work Over ☐ Deepen ☐ Plug Back ☐ Diff. Resvr.
Other

6. If Indian, Allottee or Tribe Name

7. Unit or CA Agreement Name and No. UTU88209A

2. Name of Operator KERR MCGEE OIL & GAS ONSHORE LP — Contact: JAIME L. SCHARNOWSKE — E-Mail: JAIME.SCHARNOWSKE@ANADARKO.COM

8. Lease Name and Well No. BONANZA 1023-5M3BS

3. Address PO BOX 173779 DENVER, CO 80217

3a. Phone No. (include area code) Ph: 720-929-6304

9. API Well No. 43-047-52077

4. Location of Well (Report location clearly and in accordance with Federal requirements)*

At surface SWSW 205FSL 1001FWL 39.971262 N Lat, 109.356545 W Lon

At top prod interval reported below SWSW 584FSL 234FWL

At total depth SWSW 554FSL 251FWL BHL by HSM

10. Field and Pool, or Exploratory NATURAL BUTTES

11. Sec., T., R., M., or Block and Survey or Area Sec 5 T10S R23E Mer SLB

12. County or Parish UINTAH — 13. State UT

14. Date Spudded 04/19/2012

15. Date T.D. Reached 06/18/2012

16. Date Completed ☐ D & A ☒ Ready to Prod. 09/14/2012

17. Elevations (DF, KB, RT, GL)* 5295 GL

18. Total Depth: MD 8580 TVD 8451

19. Plug Back T.D.: MD 8495 TVD 8367

20. Depth Bridge Plug Set: MD TVD

21. Type Electric & Other Mechanical Logs Run (Submit copy of each)
BHP-HDIL/ZDL/CNGR-CBL/GR/CCL/TEMP

22. Was well cored? ☒ No ☐ Yes (Submit analysis)
Was DST run? ☒ No ☐ Yes (Submit analysis)
Directional Survey? ☐ No ☒ Yes (Submit analysis)

23. Casing and Liner Record *(Report all strings set in well)*

Hole Size	Size/Grade	Wt. (#/ft.)	Top (MD)	Bottom (MD)	Stage Cementer Depth	No. of Sks. & Type of Cement	Slurry Vol. (BBL)	Cement Top*	Amount Pulled
20.000	14.000 STL	36.7	0	40		28			
11.000	8.625 IJ-55	28.0	0	2446		922		0	
7.875	4.500 I-80	11.6	0	8541		1635		1470	

24. Tubing Record

Size	Depth Set (MD)	Packer Depth (MD)	Size	Depth Set (MD)	Packer Depth (MD)	Size	Depth Set (MD)	Packer Depth (MD)
2.375	7910							

25. Producing Intervals — 26. Perforation Record

	Formation	Top	Bottom	Perforated Interval	Size	No. Holes	Perf. Status
A)	WASATCH	5781	6282	5781 TO 6282	0.360	48	OPEN
B)	MESAVERDE	7045	8416	7045 TO 8416	0.360	144	OPEN
C)							
D)							

27. Acid, Fracture, Treatment, Cement Squeeze, Etc.

Depth Interval	Amount and Type of Material
5781 TO 8416	PUMP 7,290 BBLS SLICK H2O & 172,242 LBS 30/50 OTTAWA SAND

28. Production - Interval A

Date First Produced	Test Date	Hours Tested	Test Production	Oil BBL	Gas MCF	Water BBL	Oil Gravity Corr. API	Gas Gravity	Production Method
09/14/2012	09/15/2012	24	→	0.0	950.0	0.0			FLOWS FROM WELL

Choke Size	Tbg. Press. Flwg. SI	Csg. Press.	24 Hr. Rate	Oil BBL	Gas MCF	Water BBL	Gas:Oil Ratio	Well Status
20/64	1169 SI	1758.0	→	0	950	0		PGW

28a. Production - Interval B

Date First Produced	Test Date	Hours Tested	Test Production	Oil BBL	Gas MCF	Water BBL	Oil Gravity Corr. API	Gas Gravity	Production Method
			→						

Choke Size	Tbg. Press. Flwg. SI	Csg. Press.	24 Hr. Rate	Oil BBL	Gas MCF	Water BBL	Gas:Oil Ratio	Well Status
			→					

RECEIVED
OCT 16 2012
DIV. OF OIL, GAS & MINING

(See Instructions and spaces for additional data on reverse side)

ELECTRONIC SUBMISSION #154004 VERIFIED BY THE BLM WELL INFORMATION SYSTEM

**** OPERATOR-SUBMITTED ** OPERATOR-SUBMITTED ** OPERATOR-SUBMITTED**

28b. Production - Interval C

Date First Produced	Test Date	Hours Tested	Test Production	Oil BBL	Gas MCF	Water BBL	Oil Gravity Corr. API	Gas Gravity	Production Method
			→						

Choke Size	Tbg. Press. Flwg. SI	Csg. Press.	24 Hr. Rate	Oil BBL	Gas MCF	Water BBL	Gas:Oil Ratio	Well Status
			→					

28c. Production - Interval D

Date First Produced	Test Date	Hours Tested	Test Production	Oil BBL	Gas MCF	Water BBL	Oil Gravity Corr. API	Gas Gravity	Production Method
			→						

Choke Size	Tbg. Press. Flwg. SI	Csg. Press.	24 Hr. Rate	Oil BBL	Gas MCF	Water BBL	Gas:Oil Ratio	Well Status
			→					

29. Disposition of Gas *(Sold, used for fuel, vented, etc.)*
SOLD

30. Summary of Porous Zones (Include Aquifers):

Show all important zones of porosity and contents thereof: Cored intervals and all drill-stem tests, including depth interval tested, cushion used, time tool open, flowing and shut-in pressures and recoveries.

31. Formation (Log) Markers

Formation	Top	Bottom	Descriptions, Contents, etc.	Name	Top Meas. Depth
				GREEN RIVER	1197
				BIRD'S NEST	1494
				MAHOGANY	1894
				WASATCH	4344
				MESAVERDE	6405

32. Additional remarks (include plugging procedure):
The first 210?of the surface hole was drilled with a 12 ?? bit. The remainder of surface hole was drilled with an 11? bit. DQX csg was run from surface to 5029 ft; LTC csg was run from 5,029 ft to 8,541 ft. Attached is the chronological well history, perforation report & final survey.

33. Circle enclosed attachments:

1. Electrical/Mechanical Logs (1 full set req'd.)
2. Geologic Report
3. DST Report
4. Directional Survey
5. Sundry Notice for plugging and cement verification
6. Core Analysis
7 Other:

34. I hereby certify that the foregoing and attached information is complete and correct as determined from all available records (see attached instructions):

Electronic Submission #154004 Verified by the BLM Well Information System.
For KERR MCGEE OIL & GAS ONSHORE,L, sent to the Vernal

Name *(please print)* JAIME L. SCHARNOWSKE Title REGULATORY ANALYST

Signature (Electronic Submission) Date 10/09/2012

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fradulent statements or representations as to any matter within its jurisdiction.

**** ORIGINAL ** ORIGINAL ** ORIGINAL ** ORIGINAL ** ORIGINAL ** ORIGINAL ** ORIGINAL ****

US ROCKIES REGION

Operation Summary Report

Well: BONANZA 1023-5M3BS BLACK		Spud Date: 5/3/2012
Project: UTAH-UINTAH	Site: BONANZA 1023-5M PAD	Rig Name No: PROPETRO 12/12, ENSIGN 138/138
Event: DRILLING	Start Date: 4/12/2012	End Date: 6/21/2012
Active Datum: RKB @5,309.00usft (above Mean Sea Level)	UWI: SW/SW/0/10/S/23/E/5/0/0/26/PM/S/205/W/0/1001/0/0	

Date	Time Start-End	Duration (hr)	Phase	Code	Sub Code	P/U	MD From (usft)	Operation
5/3/2012	16:00 - 16:30	0.50	PRPSPD	01	B	P		SAFETY AND RIG INSPECTION
	16:30 - 20:00	3.50	PRPSPD	07	A	P		RIG SERVICE / PRE SPUD JOB SAFETY MEETING / FINISH PICKING UP BHA. PICK UP NOV 1.83 DEGREE BENT MOTOR (RUN #3)- .17 REV/GAL SN (775-77259). REINSTALL FLOWLINE AND CONTROL LINES TO FLOOR.
	20:00 - 21:30	1.50	DRLSUR	02	D	P		SPUD 05/03/2012 2000 hrs. DRILL 12.25" HOLE 44 ft TO 210 ft (166 FT, 113 FPH). 12.25 in. BIT ON 43 rd RUN. WOB 5-15 Kips. GPM 491. PSI ON/OFF 800/600. SURFACE RPM 55, MOTOR 83, TOTAL RPM 138. UP/DOWN/ ROT 20/20/20 K. DRAG 0 Kips . CIRCULATE CLOSED LOOP SYSTEM W/ 8.5 ppg WATER. DRILL DOWN TO 210 ft W/6 in COLLARS.
	21:30 - 22:00	0.50	DRLSUR	05	C	P		CIRC 15 min. AND TRIP OUT TO CHANGE ASSEMBLY.
	22:00 - 23:30	1.50	DRLSUR	06	A	P		PRE JOB SAFETY MEETING, LAY DOWN 6 in DRILL COLLARS, 12 1/4 in BIT. MAKE UP Q506F 11in BIT (3 rd RUN) (SN 7138966) PICK UP 8 in DIRECTIONAL ASSEMBLY. INSTALL EM TOOL. TRIP IN HOLE.
	23:30 - 0:00	0.50	DRLSUR	02	D	P		DRILL 11in. SURFACE HOLE 210 ft. TO 272 ft., (62 ft., 111 FPH). WOB 15-25 Kips. GPM 491. PSI ON/OFF 1080/988. SURFACE RPM 55, MOTOR 83, TOTAL RPM 139. UP/DOWN/ ROT 28/28/28 K. DRAG 0 Kips. CIRCULATE CLOSED LOOP PITS WITH 8.5 ppg WATER. NO HOLE ISSUES.
5/4/2012	0:00 - 10:00	10.00	DRLSUR	02	D	P		DRILL 11in. SURFACE HOLE 270 ft. TO 1460 ft., (1190 ft., 113 FPH). WOB 15-25 Kips. GPM 491. PSI ON/OFF 1030/875. SURFACE RPM 55, MOTOR 83, TOTAL RPM 138. UP/DOWN/ ROT 53/43/49 K. DRAG 4 Kips. CIRCULATE CLOSED LOOP PITS WITH 8.7 ppg WATER. NO HOLE ISSUES.
	10:00 - 11:00	1.00	DRLSUR	08	A	S		RIG REPAIR, LEAKING OIL SEAL ON WIRE SPOOL, NO SPILLS.

US ROCKIES REGION

Operation Summary Report

Well: BONANZA 1023-5M3BS BLACK			Spud Date: 5/3/2012
Project: UTAH-UINTAH	Site: BONANZA 1023-5M PAD		Rig Name No: PROPETRO 12/12, ENSIGN 138/138
Event: DRILLING	Start Date: 4/12/2012		End Date: 6/21/2012
Active Datum: RKB @5,309.00usft (above Mean Sea Level)	UWI: SW/SW/0/10/S/23/E/5/0/0/26/PM/S/205/W/0/1001/0/0		

Date	Time Start-End	Duration (hr)	Phase	Code	Sub Code	P/U	MD From (usft)	Operation
	11:00 - 0:00	13.00	DRLSUR	02	D	P		DRILL 11in. SURFACE HOLE 1460 ft. TO 2390 ft., (930 ft. , 71 FPH). LOST RETURNS AT 1640 ft. MD. WOB 15-25 Kips. GPM 491. PSI ON/OFF 1100/900. SURFACE RPM 55, MOTOR 83, TOTAL RPM 138. UP/DOWN/ ROT 82/58/67 K. DRAG 15 Kips. CIRCULATE CLOSED LOOP PITS WITH 8.7 ppg WATER. NO HOLE ISSUES.
5/5/2012	0:00 - 1:00	1.00	DRLSUR	02	D	P		DRILL 11in. SURFACE HOLE 2390 ft. TO 2452 ft., (62 ft. , 62 FPH). WOB 15-25 Kips. GPM 491. PSI ON/OFF 1300/1220. SURFACE RPM 55, MOTOR 83, TOTAL RPM 138. UP/DOWN/ ROT 89/6/71 K. DRAG 10 Kips. CIRCULATE CLOSED LOOP PITS WITH 8.7 ppg WATER. NO HOLE ISSUES.
	1:00 - 3:00	2.00	CSGSUR	05	C	P		CONDITION WELLBORE FOR CASING RUN
	3:00 - 7:00	4.00	CSGSUR	06	D	P		TRIP OUT OF HOLE, LAY DOWN BOTTOM HOLE ASSEMBLY, DIRECTIONAL TOOLS, MOTOR AND BIT. LAY DOWN DIRECTIONAL TOOLS. CLEAR TOOL AREA.
	7:00 - 8:30	1.50	CSGSUR	06	A	P		PRE JOB SAFETY MEETING, MOVE PIPE RACKS AND CATWALK. PULL DIVERTER HEAD. RIG UP TO RUN SURFACE CASING. CLEAR UNRELATED TOOLS.
	8:30 - 11:00	2.50	CSGSUR	12	C	P		RUN 55 JOINTS OF 8-5/8 in. 28# J-55 LTC CASING. LAND FLOAT SHOE @ 2436 ft. KB. LAND BAFFLE PLATE @ 2390 ft. KB. RAN 5 TOTAL CENTRALIZERS.
	11:00 - 12:30	1.50	CSGSUR	12	E	P		RAN 200 ft OF 1 lin. PIPE DOWN BACK-SIDE OF CASING. PRE JOB SAFETY MEETING, PRESSURE TEST LINES TO 2000 PSI. PUMP 130 BBLS OF WATER AHEAD. MIX AND PUMP 20 BBLS OF 8.5# GEL WATER AHEAD. MIX AND PUMP (300 sx) 61.4 BBLS OF 15.8.8# 1.15 YIELD. DROP PLUG ON FLY. DISPLACE W/ 146 BBLS OF H2O. NO RETURNS THROUGH OUT JOB. FINAL LIFT OF 100 PSI AT 3 BBL/MIN. SHUT DOWN HELD 400 PSI FOR 5 MIN. TESTED FLOAT AND FLOAT HELD.
	12:30 - 13:00	0.50	CSGSUR	12	E	P		CEMENT DOWN ONE INCH TREMMIE W/ 150 sx (30.7 bbls.)SAME CEMENT WITHOUT RETURNS TO SURFACE.
	14:00 - 14:30	0.50	CSGSUR	12	E	P		WAIT 1.5 HOURS ON CEMENT, CEMENT DOWN BACKSIDE W/ 125 sx (46 bbls.) SAME CEMENT WITHOUT RETURNS TO SURFACE. ATTEMPT ADJACENT WELL TOP OUTS. RIG DOWN CEMENTERS. (CEMENT JOB FINISHED AT 1430 hrs. 5/05/2012)
	14:30 - 15:00	0.50	RDMO	01	A	P		CONTINUE RIGGING DOWN, PREPARE TO SKID, RELEASE RIG AT 1500 hrs. 5-5-2012

US ROCKIES REGION

Operation Summary Report

Well: BONANZA 1023-5M3BS BLACK		Spud Date: 5/3/2012
Project: UTAH-UINTAH	Site: BONANZA 1023-5M PAD	Rig Name No: PROPETRO 12/12, ENSIGN 138/138
Event: DRILLING	Start Date: 4/12/2012	End Date: 6/21/2012
Active Datum: RKB @5,309.00usft (above Mean Sea Level)	UWI: SW/SW/0/10/S/23/E/5/0/0/26/PM/S/205/W/0/1001/0/0	

Date	Time Start-End	Duration (hr)	Phase	Code	Sub Code	P/U	MD From (usft)	Operation
6/16/2012	8:00 - 9:00	1.00	MIRU	01	C	P		PULL CAT WALK FORWARD AND PREP RIG TO WALK FOWARD. WALK RIG OVER WELL 6 OF 7. SET DOWN STACK . LEVEL AND CENTER RIG OVER HOLE. SET BACK CAT WALK. ADD 250 BBLS OF 32 VIS DRILL WATER INTO PITS AND 150 BBLS OF FRESH WATER. (START DEWATERING)
	9:00 - 9:30	0.50	MIRU	14	A	P		MAKE UP CAMERON QUICK ADAPTOR. INSTALL FLOW LINE IN SUB AND TO PITS. RIG UP TURN BUCKLES.
	9:30 - 13:30	4.00	MIRU	15	A	P		HOLD SAFETY MEETING. TEST TOP DRIVE VALVE, I-BOP VALVE, FLOOR VALVE, DART VALVE, PIPE AND BLIND RAMS, INSIDE AND OUTSIDE KILL LINE VALVES INSIDE CHOKE LINE VALVE, HCR VALVE, CHOKE LINE, CHOKE MANIFOLD VALVES AND CHOKES TO 5000 PSI FOR 10 MINUTES AND 250 PSI FOR 5 MINUTES. TEST ANNULLAR TO 2500 PSI FOR 10 MIN AND 250 PSI FOR 5 MINUTES. TESTING CASING TO 1500 PSI FOR 30 MINUTES. INSTALL WEAR BUSHING. PERFORM PRESPUD INSPECTION.
	13:30 - 16:30	3.00	MIRU	06	A	P		P/U SDI 1.5 BH .23 RPG MUD MOTOR. MAKE UP SMITH MDI 616 WITH 3-13'S AND 4-14S'S JETS. (SN JF9223) SCRIBED MOTOR.RUN IN WITH PONY COLLARS AND MONELS. BREAK APART MONELS. INSTALL EM TOOL. MAKE BACK UP MONELS. TRIP IN HOLE WITH HEAVY WEIGHT DRILL PIPE. INSTALL NEW ROTATING HEAD RUBBER. TRIP IN AND TAG CEMENT 2350'.
	16:30 - 17:00	0.50	DRLPRO	02	F	P		SPUD 6/16/2012 16:30. DRILL CEMENT AND FLOAT EQUIPMENT 2350'-2462'. SURFACE CASING SHOE @ 2436'. DRILLED WITH 15K ON BIT AND 45 RPM. @ 450 GPM.

US ROCKIES REGION

Operation Summary Report

Well: BONANZA 1023-5M3BS BLACK		Spud Date: 5/3/2012	
Project: UTAH-UINTAH	Site: BONANZA 1023-5M PAD		Rig Name No: PROPETRO 12/12, ENSIGN 138/138
Event: DRILLING	Start Date: 4/12/2012		End Date: 6/21/2012
Active Datum: RKB @5,309.00usft (above Mean Sea Level)	UWI: SW/SW/0/10/S/23/E/5/0/0/26/PM/S/205/W/0/1001/0/0		

Date	Time Start-End	Duration (hr)	Phase	Code	Sub Code	P/U	MD From (usft)	Operation
	17:00 - 0:00	7.00	DRLPRO	02	D	P		DRILL SLIDE 2462'-3615' (1153',164'/HR) WEIGHT ON BIT 18-23K. AVERAGE WEIGHT ON BIT 21K. ROTARY RPM 50-60. MUD MOTOR RPM 124. STROKES PER MINUTE 120 (BOTH PUMPS AT 60 SPM) GALLONS PER MINUTE 540.. ON/OFF PSI 2000/1400. DIFFERENTIAL 600. TORQUE HIGH/LOW 9500/7400. OFF BOTTOM TORQUE 5000 STRING WEIGHT UP/DOWN/ROT 126/103/118. DRAG 8K. COME OUT OF SHOE @ 19 DEGREES AND HOLD TO 2779' THEN START DROP. 12' NORTH 12' EAST' OF CENTER @ 3527'. SLIDE 105' AT 125'/HR. SLIDE 9% ROTATE 91%. RUNNING 2 CENTRIFUGES AND DE WATERING.(WT 8.5 VIS 28.) USED 62 BBLS DRILL WATER FOR HOLE VOLUME. LOSS 126 BBLS DRILL WATER INTO FORMATION. (LOSING 18 BBLS HR) (ADDED 90 BBLS OF 32 VIS DRILL WATER FOR PILLS AND 90 BBLS OF FRESH WATER TO MAINTAIN VOLUME) PUMP 50 VIS GEL AND 5% SAWDUST SWEEPS TO HELP CONTROL LOSSES. PUMP 15 BBLS SWEEP EVERY 200'. NO FLARE. BOP DRILL 70 SEC.

US ROCKIES REGION

Operation Summary Report

Well: BONANZA 1023-5M3BS BLACK		Spud Date: 5/3/2012	
Project: UTAH-UINTAH	Site: BONANZA 1023-5M PAD		Rig Name No: PROPETRO 12/12, ENSIGN 138/138
Event: DRILLING	Start Date: 4/12/2012		End Date: 6/21/2012
Active Datum: RKB @5,309.00usft (above Mean Sea Level)	UWI: SW/SW/0/10/S/23/E/5/0/0/26/PM/S/205/W/0/1001/0/0		

Date	Time Start-End	Duration (hr)	Phase	Code	Sub Code	P/U	MD From (usft)	Operation
6/17/2012	0:00 - 3:30	3.50	DRLPRO	02	D	P		DRILL SLIDE 3615'- 4150' (535', 152'/HR) WEIGHT ON BIT 18-23K. AVERAGE WEIGHT ON BIT 21K. ROTARY RPM 50-60. MUD MOTOR RPM 124. STROKES PER MINUTE 120 (BOTH PUMPS AT 60 SPM) GALLONS PER MINUTE 540. ON/OFF PSI 2050/1450. DIFFERENTIAL 600. TORQUE HIGH/LOW 11000/7000. OFF BOTTOM TORQUE 6400 STRING WEIGHT UP/DOWN/ROT 135/117/121. DRAG 14K. HOLE VERTICAL @ 4000' 12' NORTH 13' WEST' OF CENTER @ 4095'. SLIDE 40' AT 115'/HR. SLIDE 7% ROTATE 93%. RUNNING 2 CENTRIFUGES AND DE WATERING.(WT 8.4 VIS 26.) USED 29 BBLS DRILL WATER FOR HOLE VOLUME. LOSS 50 BBLS DRILL WATER INTO FORMATION. (LOSING 14 BBLS HR) (ADDED 50 BBLS OF 32 VIS DRILL WATER FOR PILLS AND 50 BBLS OF FRESH WATER TO MAINTAIN VOLUME) PUMP 50 VIS GEL AND 5% SAWDUST SWEEPS TO HELP CONTROL LOSSES. PUMP 15 BBLS SWEEP EVERY 200'. NO FLARE. BOP DRILL 60 SEC.
	3:30 - 4:00	0.50	MAINT	08	B	Z		***FAILURE: RIG EQUIPMENT - (TOP DRIVE) LOST TOP DRIVE FUNCTIONS. TROUBLE SHOOT. RESET PLC.

US ROCKIES REGION

Operation Summary Report

Well: BONANZA 1023-5M3BS BLACK		Spud Date: 5/3/2012	
Project: UTAH-UINTAH	Site: BONANZA 1023-5M PAD		Rig Name No: PROPETRO 12/12, ENSIGN 138/138
Event: DRILLING	Start Date: 4/12/2012		End Date: 6/21/2012
Active Datum: RKB @5,309.00usft (above Mean Sea Level)	UWI: SW/SW/0/10/S/23/E/5/0/0/26/PM/S/205/W/0/1001/0/0		

Date	Time Start-End	Duration (hr)	Phase	Code	Sub Code	P/U	MD From (usft)	Operation
	4:00 - 6:00	2.00	DRLPRO	02	D	P		DRILL SLIDE 4150'-4415' (265', 132'/HR) WEIGHT ON BIT 18-23K. AVERAGE WEIGHT ON BIT 21K. ROTARY RPM 50-60. MUD MOTOR RPM 124. STROKES PER MINUTE 120 (BOTH PUMPS AT 60 SPM) GALLONS PER MINUTE 540. ON/OFF PSI 2050/1450. DIFFERENTIAL 600. TORQUE HIGH/LOW 10500/8800. OFF BOTTOM TORQUE 6500 STRING WEIGHT UP/DOWN/ROT 140/117/124. DRAG 16K. 10' NORTH 11' WEST' OF CENTER @ 4379'. SLIDE 25' AT 100'/HR. SLIDE 9% ROTATE 91%. RUNNING 2 CENTRIFUGES AND DE WATERING.(WT 8.4 VIS 26.) USED 14 BBLS DRILL WATER FOR HOLE VOLUME. LOSS 28 BBLS DRILL WATER INTO FORMATION. (LOSING 14 BBLS HR) (ADDED 25 BBLS OF 32 VIS DRILL WATER FOR PILLS AND 25 BBLS OF FRESH WATER TO MAINTAIN VOLUME) PUMP 50 VIS GEL AND 5% SAWDUST SWEEPS TO HELP CONTROL LOSSES. PUMP 15 BBLS SWEEP EVERY 200'. NO FLARE.
	6:00 - 6:30	0.50	DRLPRO	07	A	P		SERVICE RIG. SERVICE TOP DRIVE. SERVICE CROWN. FIX VIDEO FEED TO CAMERA.
	6:30 - 12:00	5.50	DRLPRO	02	A	P		DRILL SLIDE 4415'- 5338' (923',153'/HR) WEIGHT ON BIT 18-23K. AVERAGE WEIGHT ON BIT 21K. ROTARY RPM 50-60. MUD MOTOR RPM 124. STROKES PER MINUTE 120 (BOTH PUMPS AT 60 SPM) GALLONS PER MINUTE 540. ON/OFF PSI 2200/1600. DIFFERENTIAL 600. TORQUE HIGH/LOW 11300/9600. OFF BOTTOM TORQUE 8800 STRING WEIGHT UP/DOWN/ROT 188/143/151. DRAG 37K. 18' NORTH 11' WEST' OF CENTER @ 5324'. SLIDE 55' AT 110'/HR. SLIDE 6% ROTATE 94%. RUNNING 2 CENTRIFUGES AND DE WATERING.(WT 8.6 VIS 27.) USED 50 BBLS DRILL WATER FOR HOLE VOLUME. LOSS 55 BBLS DRILL WATER INTO FORMATION. (LOSING 10 BBLS HR) (ADDED 90 BBLS OF 32 VIS DRILL WATER FOR SWEEPS) PUMP 50 VIS GEL AND 5% SAWDUST SWEEPS TO HELP CONTROL LOSSES. PUMP 15 BBLS SWEEP EVERY 200'. NO FLARE

US ROCKIES REGION

Operation Summary Report

Well: BONANZA 1023-5M3BS BLACK		Spud Date: 5/3/2012	
Project: UTAH-UINTAH	Site: BONANZA 1023-5M PAD		Rig Name No: PROPETRO 12/12, ENSIGN 138/138
Event: DRILLING	Start Date: 4/12/2012		End Date: 6/21/2012
Active Datum: RKB @5,309.00usft (above Mean Sea Level)	UWI: SW/SW/0/10/S/23/E/5/0/0/26/PM/S/205/W/0/1001/0/0		

Date	Time Start-End	Duration (hr)	Phase	Code	Sub Code	P/U	MD From (usft)	Operation
	12:00 - 18:00	6.00	DRLPRO	02	D	P		DRILL SLIDE 5338'-6112' (774',129'/HR) WEIGHT ON BIT 18-23K. AVERAGE WEIGHT ON BIT 21K. ROTARY RPM 50-60. MUD MOTOR RPM 124. STROKES PER MINUTE 120 (BOTH PUMPS AT 60 SPM) GALLONS PER MINUTE 540. ON/OFF PSI 2200/1650. DIFFERENTIAL 550. TORQUE HIGH/LOW 11800/9400. OFF BOTTOM TORQUE 9000 STRING WEIGHT UP/DOWN/ROT 188/143/151. DRAG 37K. 18' NORTH 4' WEST' OF CENTER @ 5986'. SLIDE 0' SLIDE 0% ROTATE 100%. RUNNING 2 CENTRIFUGES AND DE WATERING.(WT 8.6 VIS 27.) USED 41 BBLS DRILL WATER FOR HOLE VOLUME. LOSS 39 BBLS DRILL WATER INTO FORMATION. (LOSING 6.5 BBLS HR) (ADDED 80 BBLS OF 32 VIS DRILL WATER FOR SWEEPS AND VOLUME) PUMP 50 VIS GEL AND 5% SAWDUST SWEEPS TO HELP CONTROL LOSSES. PUMP 15 BBLS SWEEP EVERY 200'.
	18:00 - 0:00	6.00	DRLPRO	02	D	P		DRILL SLIDE 6112'-6931' (819', 136'/HR) WEIGHT ON BIT 18-25K. AVERAGE WEIGHT ON BIT 23K. ROTARY RPM 50-60. MUD MOTOR RPM 124. STROKES PER MINUTE 120 (BOTH PUMPS AT 60 SPM) GALLONS PER MINUTE 540. ON/OFF PSI 2325/1725. DIFFERENTIAL 600. TORQUE HIGH/LOW 12700/9700. OFF BOTTOM TORQUE 9100 STRING WEIGHT UP/DOWN/ROT 186/146/162. DRAG 24K. 18' NORTH 6' WEST' OF CENTER @ 6837'. SLIDE 90' @ 70'/HR SLIDE 11% ROTATE 89%. RUNNING 2 CENTRIFUGES AND DE WATERING.(WT 8.6 VIS 27.) USED 44 BBLS DRILL WATER FOR HOLE VOLUME. LOSS 74 BBLS DRILL WATER INTO FORMATION. (LOSING 12 BBLS HR) (ADDED 120 BBLS OF 32 VIS DRILL WATER FOR SWEEPS AND VOLUME) PUMP 50 VIS GEL AND 5% SAWDUST SWEEPS TO HELP CONTROL LOSSES. PUMP 15 BBLS SWEEP EVERY 200'.

US ROCKIES REGION

Operation Summary Report

Well: BONANZA 1023-5M3BS BLACK		Spud Date: 5/3/2012	
Project: UTAH-UINTAH	Site: BONANZA 1023-5M PAD		Rig Name No: PROPETRO 12/12, ENSIGN 138/138
Event: DRILLING	Start Date: 4/12/2012		End Date: 6/21/2012
Active Datum: RKB @5,309.00usft (above Mean Sea Level)	UWI: SW/SW/0/10/S/23/E/5/0/0/26/PM/S/205/W/0/1001/0/0		

Date	Time Start-End	Duration (hr)	Phase	Code	Sub Code	P/U	MD From (usft)	Operation
6/18/2012	0:00 - 10:00	10.00	DRLPRO	02	D	P		DRILL SLIDE 6931'-8027' (1096',109'/HR) WEIGHT ON BIT 18-26K. AVERAGE WEIGHT ON BIT 24K. ROTARY RPM 50-60. MUD MOTOR RPM 124. STROKES PER MINUTE 120 (BOTH PUMPS AT 60 SPM) GALLONS PER MINUTE 540. ON/OFF PSI 2250/1700. DIFFERENTIAL 550. TORQUE HIGH/LOW 15800/12400. OFF BOTTOM TORQUE 11000 STRING WEIGHT UP/DOWN/ROT 210/168/185. DRAG 25K. 1' NORTH .5' EAST OF CENTER @ 7972'. SLIDE 60' @ 60'/HR SLIDE 5% ROTATE 95%. RUNNING 2 CENTRIFUGES AND DE WATERING TILL 7500'. (START LIGHT MUD UP PUT SOLID CONTROLS ON CONVENTIONAL. (NO DEWATERING) USED 60 BBLS DRILL WATER FOR HOLE VOLUME. LOSS 40 BBLS DRILL WATER INTO FORMATION BEFORE LIGHT MUD UP. (LOSING 10 BBLS HR) (ADDED 100 BBLS OF 32 VIS DRILL WATER FOR SWEEPS AND VOLUME) PERFORM LIGHT MUD UP @ 7500'. (MUD IN WT 8.7 VIS 32/ MUD OUT 8.7 VIS 34.) 5% SAWDUST SWEEPS TO HELP CONTROL LOSSES. PUMP 15 BBLS SWEEP EVERY 100'. NO LOSSES. NO FLARES. (RECEIVED CASING, HELD SAFETY MEETING. CLEAN AND DRIFTED CASING. BAG ENDS AND RETURNED THREAD PROTECTORS TO THREADS.)

US ROCKIES REGION

Operation Summary Report

Well: BONANZA 1023-5M3BS BLACK		Spud Date: 5/3/2012	
Project: UTAH-UINTAH	Site: BONANZA 1023-5M PAD		Rig Name No: PROPETRO 12/12, ENSIGN 138/138
Event: DRILLING	Start Date: 4/12/2012		End Date: 6/21/2012
Active Datum: RKB @5,309.00usft (above Mean Sea Level)	UWI: SW/SW/0/10/S/23/E/5/0/0/26/PM/S/205/W/0/1001/0/0		

Date	Time Start-End	Duration (hr)	Phase	Code	Sub Code	P/U	MD From (usft)	Operation
	10:00 - 18:30	8.50	DRLPRO	02	D	P		DRILL SLIDE 8027'- 8580' (523,62'/HR) TD 6/18/2012 18:30. WEIGHT ON BIT 18-26K. AVERAGE WEIGHT ON BIT 24K. ROTARY RPM 50-60. MUD MOTOR RPM 124. STROKES PER MINUTE 120 (BOTH PUMPS AT 60 SPM) GALLONS PER MINUTE 540. ON/OFF PSI 2650/2000. DIFFERENTIAL 650. TORQUE HIGH/LOW 15400/12500. OFF BOTTOM TORQUE 11700 STRING WEIGHT UP/DOWN/ROT 205/160/177. DRAG 28K. 10' SOUTH 13' EAST OF CENTER @ 8580' TD. SLIDE 0' @ SLIDE 0% ROTATE 100%. RAN NOV ON CONVENTIONAL TILL 8311' THEN BYPASSED CENTRIFUGES TO DISPLACE IN HEAVY MUD. USED 28 BBLS DRILL WATER FOR HOLE VOLUME. NO LOSSES . MUD IN WT 8.7+ VIS 33/ MUD OUT 8.7 VIS 33.BEFORE DISPLACING IN HEAVY MUD) NO FLARES. BY PASS NOV. START DISPLACING IN 850 BBLS OF 11.3 MUD AT 8311' . DISPLACE OUT 800 BBLS OF 8.7 WT 32 VIS DRILL WATER. MUD IN WT 11.2 VIS 36. MUD OUT WT 11.2 VIS 41.AT TD. SWEEP HOLE WITH LCM SWEEPS WHILE DISPLACING TO HELP MAINTAIN CIRCULATION.
	18:30 - 20:30	2.00	EVALPR	05	A	P		CIRCULATE AND CONDITION HOLE WITH MUD IN WT 11.2 VIS 40. MUD OUT WT 11.2 VIS 41. MONITOR RETURNS OVER SHAKERS. RETURNS WERE CLEAN COMING OVER SHAKER. PUMP SAWDUST SWEEPS TO HELP MAINTAIN FULL CIRCULATION AND TO CLEAN HOLE. MIX 30 BBLS 12.8# PILL AND HOLD. NO GAS.
	20:30 - 0:00	3.50	EVALPR	06	E	P		(WIPER TRIP) PUMP AND ROTATE OUT OF HOLE TO 7700'. PUMP MUD FROM CELLAR TO MUD TANKS. NO FLOW ON FLOW CHECK. PUMP DRY JOB AT 7700' AND WIPER TRIP TO SHOE. HOLE TAKING PROPER FLUID. (SLIGHTLY TIGHT HOLE @ 4800.) WIPER TRIPPING @ 3000' MIDNIGHT.
6/19/2012	0:00 - 0:30	0.50	EVALPR	06	E	P		WIPER TRIP TO SHOE. HOLE TOOK PROPER FLUID. NO FLOW ON FLOW CHECK AT SHOE.
	0:30 - 3:00	2.50	EVALPR	06	E	P		TRIP BACK TO BOTTOM. NO TIGHT HOLE ON TRIP IN. GOOD DISPLACEMENT THROUGH OUT TRIP. LOSS 10 BBLS ON TRIP. 10' OF FILL ON BOTTOM.

US ROCKIES REGION

Operation Summary Report

Well: BONANZA 1023-5M3BS BLACK			Spud Date: 5/3/2012
Project: UTAH-UINTAH	Site: BONANZA 1023-5M PAD		Rig Name No: PROPETRO 12/12, ENSIGN 138/138
Event: DRILLING	Start Date: 4/12/2012		End Date: 6/21/2012
Active Datum: RKB @5,309.00usft (above Mean Sea Level)	UWI: SW/SW/0/10/S/23/E/5/0/0/26/PM/S/205/W/0/1001/0/0		

Date	Time Start-End	Duration (hr)	Phase	Code	Sub Code	P/U	MD From (usft)	Operation
	3:00 - 5:00	2.00	EVALPR	05	A	P		CIRCULATE AND CONDITION HOLE. (MUD IN WT 11.2 VIS 41 / OUT WT 11.2 VIS 40) CIRCULATE BOTTOMS UP 2 TIMES. MONITOR CUTTING ACROSS SHAKER. HOLE CLEAN. NO LOSSES. CONTINUE SWEEPING HOLE WITH LCM TO HELP CLEAN HOLE AND TO HELP PREVENT LOSSES. MAKE 30 BBL 13# DRY JOB AND HOLD. NO FLOW ON FLOW CHECK.
	5:00 - 11:30	6.50	EVALPR	06	B	P		PUMP AND ROTATE OFF BOTTOM TO 8200'. HOLE PULLING SLICK. PUMP DRY JOB. TRIP OUT OF HOLE FOR LOGS. HOLE TAKING PROPER FLUID ON TRIP. NO TIGHT HOLE. NO FLOW ON FLOW CHECKS. PULL OUT BHA. PULL ROTATING HEAD RUBBER. PULL EM TOOL OUT OF MONELS AND STAND BACK.
	11:30 - 13:30	2.00	MAINT	08	B	Z		***FAILURE: RIG EQUIPMENT - (BAIL TILT RAMS ON TOP DRIVE) BENT BAIL TILT RAMS TAKING MONEL FROM ELEVATORS WITH IRON DERRICK MAN. ONLY HAD 16" RAMS INSTEAD OF 20" RAMS SO HAD REPLACE BOTH RAMS.
	13:30 - 14:00	0.50	EVALPR	06	A	P		BREAK BIT AND CHECK MOTOR. LAYDOWN MUD MOTOR.
	14:00 - 15:30	1.50	EVALPR	11	D	P		HOLD SAFETY MEETING WITH BAKER ATLAS. RIG UP LOGGERS. RUN IN HOLE WITH LOGS AND BRIDGED OUT AT 3939'. TRY WORKING THROUGH BRIDGE BUT WAS UNABLE.
	15:30 - 17:00	1.50	EVALPR	11	D	X		***FAILURE: LOGS BRIDGED OFF. 6/19/2012 15:00. PULL LOGGING TOOLS AND RIG DOWN LOGGERS.
	17:00 - 18:00	1.00	EVALPR	08	B	Z		***FAILURE: RIG EQUIPMENT - (BAIL TILT RAMS ON TOP DRIVE) ADJUSTED TILT RAMS SO THE WOULD EXTEND OUT TO GET PIPE FROM IRON DERRICK MAN.
	18:00 - 21:30	3.50	EVALPR	06	E	X		***FAILURE: LOGS BRIDGED OFF. MAKE UP TRICONE BIT AND BIT SUB. TRIP IN HOLE WITH HWDP. INSTALL ROTATING HEAD RUBBER. TRIP IN HOLE. NO TIGHT HOLE. BREAK CIRCULATION 2208', (5100' HOLE TOOK 50 BBLS FOR HOLE TO START CIRCULATING. PUMP LCM SWEEPS AND WORKED PIPE AND FULL VOLUME RETURNED) (FILL PITS WITH 50 BBLS OF 8.8 32 VIS DRILL WATER FOR VOLUME)
	21:30 - 22:00	0.50	EVALPR	07	A	X		RIG SERVICE. SERVICE IRON DERRICK MAN AND TOP DRIVE.
	22:00 - 0:00	2.00	EVALPR	06	E	X		TRIP IN HOLE BREAKING CIRCULATION AGAIN 5600' (MUD IN GOOD SHAPE WITH GOOD FLOW PROPERTIES). TRIPPING IN HOLE @ 7789'. WITH GOOD DISPLACEMENT. (NO TIGHT HOLE)
6/20/2012	0:00 - 1:00	1.00	EVALPR	06	E	X		WIPER TRIP FROM 7700' TO BOTTOM OF HOLE. 15' FILL. NO TIGHT HOLE ON TRIP. (LOSS TOTAL OF 50 BBLS ON TRIP.)

US ROCKIES REGION

Operation Summary Report

Well: BONANZA 1023-5M3BS BLACK		Spud Date: 5/3/2012	
Project: UTAH-UINTAH	Site: BONANZA 1023-5M PAD		Rig Name No: PROPETRO 12/12, ENSIGN 138/138
Event: DRILLING	Start Date: 4/12/2012		End Date: 6/21/2012
Active Datum: RKB @5,309.00usft (above Mean Sea Level)	UWI: SW/SW/0/10/S/23/E/5/0/0/26/PM/S/205/W/0/1001/0/0		

Date	Time Start-End	Duration (hr)	Phase	Code	Sub Code	P/U	MD From (usft)	Operation
	1:00 - 3:30	2.50	EVALPR	05	A	X		CIRCULATE AND CONDITION HOLE. ADD 50 BBLS OF LIGHT 8.8 VIS 32 VIS MUD INTO MUD SYSTEM. MAINTAIN MUD WT OF 11.2 VIS 42. MIX 10% TO CONTROL LOSSES AND TO CLEAN HOLE. HOLE SEEPING 3 BBLS HR. (LOSS 8 BBLS) 10' FLARE FOR 10 MIN ON BOTTOM UP- 1142 SCF BOTTOMS UP. (MIX 30 BBLS 12.7# PILL AND HOLD.)
	3:30 - 10:30	7.00	EVALPR	06	E	X		TRIP OUT OF HOLE FOR LOGS. PUMP OUT 1 JTS. PUMP DRY JOB.HOLE TAKING PROPER FLUID. PULLED THROUGH TIGHT HOLE @ 6500. WASH AND REAM TIGHT HOLE @ 5100'. LOSS 10 BBLS WHILE REAMING OUT TIGHT HOLE. (PUMP 20 BBL 12.5# PILL TO DRY PIPE.) FINISH TRIPPING OUT OF HOLE WITH NO MORE TIGHT HOLE. NO FLOW ON FLOW CHECKS. HOLE TAKING PROPER FLUID. BREAK BIT AND BIT SUB OFF HEAVY WT DRILL PIPE.
	10:30 - 12:00	1.50	EVALPR	11	D	X		HOLD SAFETY MEETING WITH BAKER ATLAS. RIG UP LOGGERS AND RUN IN HOLE WITH LOGGING TOOLS. LOG PAST PREVIOUS ATTEMPT OF3939' AT 12:00. OFF TROUBLE TIME.....
	12:00 - 15:30	3.50	EVALPR	11	D	P		.CONTINUE LOGGING IN HOLE. ***FAILURE: LOGS BRIDGED OFF. 6/20/2012 12:30.LOGS BRIDGED OFF AT 6088'. UNABLE TO WORK TOOLS PAST BRIDGE. LOG UP FROM 6088'-2436'. LAY DOWN LOGGING TOOLS AND RIG DOWN BAKER ATLAS.
	15:30 - 16:00	0.50	CSGPRO	14	B	P		PULL WEAR BUSHING. TAKE OFF HYDRALIC ELEVATORS.
	16:00 - 16:30	0.50	CSGPRO	12	A	P		HOLD SAFETY MEETING WITH KIMZEY CASING CREW. RIG UP CASING CREW. RIG UP CASING TONGS, AIR SLIPS AND INSTALL CASING ELEVATORS.

US ROCKIES REGION

Operation Summary Report

Well: BONANZA 1023-5M3BS BLACK		Spud Date: 5/3/2012	
Project: UTAH-UINTAH	Site: BONANZA 1023-5M PAD		Rig Name No: PROPETRO 12/12, ENSIGN 138/138
Event: DRILLING	Start Date: 4/12/2012		End Date: 6/21/2012
Active Datum: RKB @5,309.00usft (above Mean Sea Level)	UWI: SW/SW/0/10/S/23/E/5/0/0/26/PM/S/205/W/0/1001/0/0		

Date	Time Start-End	Duration (hr)	Phase	Code	Sub Code	P/U	MD From (usft)	Operation
	16:30 - 0:00	7.50	CSGPRO	12	C	P		(INSPECT FLOAT EQUIPMENT) MAKE UP 4.5" K-55 LTC WEATHERFORD FLOAT SHOE ON SHOE JT WITH THREAD LOCK. MAKE UP 4.5" K-55 FLOAT COLLAR W/ THREAD LOCK ON TOP OF SHOE JT. RUN CENTRALIZERS ON FIRST 3 JTS AND EVERY THIRD JT FOR TOTAL OF 15 CENTRALIZERS. BREAK CIRCULATION @ 842'. NO PROBLEMS WITH FLOAT SHOE OR COLLAR. RUN A TOTAL OF 80 JTS OF 4.5" 11.6# I-80 LTC CASING (3512.0'). MAKE UP DQX CROSS OVER JT AND RIG UP TORQUE TURN. PERFORM DUMP TEST. RAN A 109 JTS OF 4.5" 11.6# I-80 DQX CSG WITH TORQUE TURN (4621'). (TSI HAND WITNESSING CSG JOB). FILLED CASING AND CIRCULATED AT 2100 AND 6000'. GOOD CIRCULATION WITH NO LOSSES WAS ESTABLISHED. TOOK 2-3 K OF WEIGHT TO GO THROUGH BRIDGE @ 6088'.
6/21/2012	0:00 - 2:00	2.00	CSGPRO	12	C	P		RUNNING CASING @ 8200' AT REPORT TIME. CONTINUE RUNNING CASING @ 8000'. TAG UP ON LAST JT @ 8530'. WAS ABLE TO WASH DOWN TO 8541' BUT COULD NOT GET PIPE TO WASH ANY FURTHER. WASHED FOR 1 HR. PULLED BACK UP 1 JT AND INSTALLED ROTATING HEAD RUBBER ONTO THAT JT AND RAN BACK INTO HOLE. TOTAL 80 JTS OF 4.5" 11.6# I-80 LTC (3512.0) TOTAL 116 JTS OF 4.5" 11.6# I-80 DQX CSG (5032.4') LAND FLOAT SHOE @ 8541' LAND TOP OF FLOAT COLLAR @ 8495.4' KB. LAND TOP OF MESA MARKER JT @ 6355.7' KB LAND TOP DQX TO LTC CROSS OVER JT @ 5012.2' KB.
	2:00 - 2:30	0.50	CSGPRO	05	A	P		CIRCULATE AND CONDITION HOLE. CIRCULATED AND CONDITION HOLE 1 HR PRIOR TRYING TO WASH DOWN CASING. NO LOSSES WHILE CIRCULATING. MUD WT 11.2 VIS 41. RIG DOWN CASING CREW. HOLD SAFETY MEETING WITH BAKER HUGHES CEMENTERS.

US ROCKIES REGION

Operation Summary Report

Well: BONANZA 1023-5M3BS BLACK		Spud Date: 5/3/2012	
Project: UTAH-UINTAH	Site: BONANZA 1023-5M PAD		Rig Name No: PROPETRO 12/12, ENSIGN 138/138
Event: DRILLING	Start Date: 4/12/2012		End Date: 6/21/2012
Active Datum: RKB @5,309.00usft (above Mean Sea Level)	UWI: SW/SW/0/10/S/23/E/5/0/0/26/PM/S/205/W/0/1001/0/0		

Date	Time Start-End	Duration (hr)	Phase	Code	Sub Code	P/U	MD From (usft)	Operation
	2:30 - 5:30	3.00	CSGPRO	12	E	P		RIG UP CEMENT HEAD WITH BAKER HUGHES TOP PLUG INSTALLED. PRESSURE TEST LINES TO 4500 PSI. PUMP 25 BBLS OF FRESH WATER. PUMP 177.97 BBLS (435 SX) OF 12.0# 2.30 YIELD 12.31 GAL/SK OF LEAD CEMENT.(10% KOL SEAL) PUMP 281.17 BBLS (1200SX) OF 14.3# 1.31 YIELD 5.91 GAL/SK POZ 50/50 TAIL CEMENT. SHUT DOWN AND FLUSH LINES. DROP TOP PLUG. DISPLACE WITH 132.3 BBLS OF FRESH WATER TREATED WITH CLAYFIX AND MAGNACIDE. ***CEMENT: LOST RETURNS GOOD RETURNS PRIOR TO DISPLACEMENT. NEVER DID CATCH CIRCULATION AFTER PUMPING DISPLACEMENT. LIFT PRESSURES DID GRADUALLY CLIMB TO EXPECTED LIFT PRESSURES OF 2600 PSI AT 3 BBLS/MIN. HOLE FULL AFTER CEMENT JOB. BUMP PLUG 3251 PSI. PRESSURE HELD 5 MINUTES. FLOAT HELD. FLOW BACK 1.5 BBLS. ESTIMATED TOP OF CEMENT FOR LEAD 2100' ESTIMATED TOP OF CEMENT FOR TAIL 3710'. STORED 800 BBLS OF 11.3# MUD. RIG DOWN CEMENTERS
	5:30 - 7:30	2.00	CSGPRO	14	A	P		STRIP OFF ROTATING HEAD RUBBER. STACK FULL OF MUD. DRAIN DOWN MUD THROUGH 2" AND WASH OUT STACK WITH HOSE. SET C-22 STYLE SLIPS THROUGH STACK AT 100K. RELEASE CAMARON QUICK ADAPTOR. UNDO TURN BUCKLES AND FLOW LINE. PICK UP STACK. CUT OFF CASING AND INSTALL SCREW ON NIGHT CAP. RELEASE RIG 6/21/2012 07:30.

1 General

1.1 Customer Information

Company	US ROCKIES REGION
Representative	
Address	

1.2 Well/Wellbore Information

Well	BONANZA 1023-5M3BS BLACK	**Wellbore No.**	OH
Well Name	BONANZA 1023-5M3BS	**Wellbore Name**	BONANZA 1023-5M3BS
Report No.	1	**Report Date**	8/21/2012
Project	UTAH-UINTAH	**Site**	BONANZA 1023-5M PAD
Rig Name/No.		**Event**	COMPLETION
Start Date	8/21/2012	**End Date**	9/14/2012
Spud Date	5/3/2012	**Active Datum**	RKB @5,309.00usft (above Mean Sea Level)
UWI	SW/SW/0/10/S/23/E/5/0/0/26/PM/S/205/W/0/1001/0/0		

1.3 General

Contractor		**Job Method**		**Supervisor**	
Perforated Assembly		**Conveyed Method**			

1.4 Initial Conditions

Fluid Type		**Fluid Density**	
Surface Press		**Estimate Res Press**	
TVD Fluid Top		**Fluid Head**	
Hydrostatic Press		**Press Difference**	
Balance Cond	NEUTRAL		

1.5 Summary

Gross Interval	5,781.0 (usft)-8,416.0 (usft	**Start Date/Time**	8/21/2012 12:00AM
No. of Intervals	38	**End Date/Time**	8/21/2012 12:00AM
Total Shots	192	**Net Perforation Interval**	52.00 (usft)
Avg Shot Density	3.69 (shot/ft)	**Final Surface Pressure**	
		Final Press Date	

2 Intervals

2.1 Perforated Interval

Date	Formation/ Reservoir	CCL@ (usft)	CCL-TS (usft)	MD Top (usft)	MD Base (usft)	Shot Density (shot/ft)	Misfires/ Add. Shot	Diameter (in)	Carr Type /Stage No	Carr Size (in)	Phasing (°)	Charge Desc /Charge Manufacturer	Charge Weight (gram)	Reason	Misrun
8/21/2012 12:00AM	WASATCH/			5,781.0	5,784.0	4.00		0.360	EXP/	3.375	90.00		23.00	PRODUCTION	

2.1 Perforated Interval (Continued)

Date	Formation/ Reservoir	CCL@ (usft)	CCL-TS (usft)	MD Top (usft)	MD Base (usft)	Shot Density (shot/ft)	Misfires/ Add. Shot	Diameter (in)	Carr Type /Stage No	Carr Size (in)	Phasing (°)	Charge Desc /Charge Manufacturer	Charge Weight (gram)	Reason	Misrun
8/21/2012 12:00AM	WASATCH/			5,828.0	5,829.0	4.00		0.360	EXP/	3.375	90.00		23.00	PRODUCTION	
8/21/2012 12:00AM	WASATCH/			5,936.0	5,938.0	4.00		0.360	EXP/	3.375	90.00		23.00	PRODUCTION	
8/21/2012 12:00AM	WASATCH/			6,276.0	6,282.0	4.00		0.360	EXP/	3.375	90.00		23.00	PRODUCTION	
8/21/2012 12:00AM	MESAVERDE/			7,045.0	7,046.0	4.00		0.360	EXP/	3.375	90.00		23.00	PRODUCTION	
8/21/2012 12:00AM	MESAVERDE/			7,117.0	7,118.0	4.00		0.360	EXP/	3.375	90.00		23.00	PRODUCTION	
8/21/2012 12:00AM	MESAVERDE/			7,154.0	7,156.0	4.00		0.360	EXP/	3.375	90.00		23.00	PRODUCTION	
8/21/2012 12:00AM	MESAVERDE/			7,186.0	7,188.0	4.00		0.360	EXP/	3.375	90.00		23.00	PRODUCTION	
8/21/2012 12:00AM	MESAVERDE/			7,299.0	7,300.0	4.00		0.360	EXP/	3.375	90.00		23.00	PRODUCTION	
8/21/2012 12:00AM	MESAVERDE/			7,319.0	7,320.0	4.00		0.360	EXP/	3.375	90.00		23.00	PRODUCTION	
8/21/2012 12:00AM	MESAVERDE/			7,372.0	7,373.0	4.00		0.360	EXP/	3.375	90.00		23.00	PRODUCTION	
8/21/2012 12:00AM	MESAVERDE/			7,404.0	7,405.0	4.00		0.360	EXP/	3.375	90.00		23.00	PRODUCTION	
8/21/2012 12:00AM	MESAVERDE/			7,464.0	7,466.0	4.00		0.360	EXP/	3.375	90.00		23.00	PRODUCTION	
8/21/2012 12:00AM	MESAVERDE/			7,538.0	7,539.0	3.00		0.360	EXP/	3.375	120.00		23.00	PRODUCTION	
8/21/2012 12:00AM	MESAVERDE/			7,549.0	7,550.0	3.00		0.360	EXP/	3.375	120.00		23.00	PRODUCTION	
8/21/2012 12:00AM	MESAVERDE/			7,565.0	7,566.0	3.00		0.360	EXP/	3.375	120.00		23.00	PRODUCTION	
8/21/2012 12:00AM	MESAVERDE/			7,576.0	7,577.0	3.00		0.360	EXP/	3.375	120.00		23.00	PRODUCTION	
8/21/2012 12:00AM	MESAVERDE/			7,587.0	7,588.0	3.00		0.360	EXP/	3.375	120.00		23.00	PRODUCTION	
8/21/2012 12:00AM	MESAVERDE/			7,616.0	7,617.0	3.00		0.360	EXP/	3.375	120.00		23.00	PRODUCTION	
8/21/2012 12:00AM	MESAVERDE/			7,696.0	7,698.0	3.00		0.360	EXP/	3.375	120.00		23.00	PRODUCTION	
8/21/2012 12:00AM	MESAVERDE/			7,740.0	7,741.0	3.00		0.360	EXP/	3.375	120.00		23.00	PRODUCTION	
8/21/2012 12:00AM	MESAVERDE/			7,764.0	7,765.0	3.00		0.360	EXP/	3.375	120.00		23.00	PRODUCTION	

2.1 Perforated Interval (Continued)

Date	Formation/ Reservoir	CCL@ (usft)	CCL-TS (usft)	MD Top (usft)	MD Base (usft)	Shot Density (shot/ft)	Misfires/ Add. Shot	Diameter (in)	Carr Type /Stage No	Carr Size (in)	Phasing (°)	Charge Desc /Charge Manufacturer	Charge Weight (gram)	Reason	Misrun
8/21/2012 12:00AM	MESAVERDE/			7,791.0	7,792.0	3.00		0.360	EXP/	3.375	120.00		23.00	PRODUCTION	
8/21/2012 12:00AM	MESAVERDE/			7,818.0	7,819.0	3.00		0.360	EXP/	3.375	120.00		23.00	PRODUCTION	
8/21/2012 12:00AM	MESAVERDE/			7,841.0	7,842.0	3.00		0.360	EXP/	3.375	120.00		23.00	PRODUCTION	
8/21/2012 12:00AM	MESAVERDE/			7,871.0	7,872.0	3.00		0.360	EXP/	3.375	120.00		23.00	PRODUCTION	
8/21/2012 12:00AM	MESAVERDE/			7,900.0	7,902.0	3.00		0.360	EXP/	3.375	120.00		23.00	PRODUCTION	
8/21/2012 12:00AM	MESAVERDE/			7,949.0	7,950.0	4.00		0.360	EXP/	3.375	90.00		23.00	PRODUCTION	
8/21/2012 12:00AM	MESAVERDE/			7,983.0	7,984.0	4.00		0.360	EXP/	3.375	90.00		23.00	PRODUCTION	
8/21/2012 12:00AM	MESAVERDE/			8,017.0	8,018.0	4.00		0.360	EXP/	3.375	90.00		23.00	PRODUCTION	
8/21/2012 12:00AM	MESAVERDE/			8,053.0	8,054.0	4.00		0.360	EXP/	3.375	90.00		23.00	PRODUCTION	
8/21/2012 12:00AM	MESAVERDE/			8,075.0	8,076.0	4.00		0.360	EXP/	3.375	90.00		23.00	PRODUCTION	
8/21/2012 12:00AM	MESAVERDE/			8,113.0	8,114.0	4.00		0.360	EXP/	3.375	90.00		23.00	PRODUCTION	
8/21/2012 12:00AM	MESAVERDE/			8,234.0	8,235.0	4.00		0.360	EXP/	3.375	90.00		23.00	PRODUCTION	
8/21/2012 12:00AM	MESAVERDE/			8,245.0	8,246.0	4.00		0.360	EXP/	3.375	90.00		23.00	PRODUCTION	
8/21/2012 12:00AM	MESAVERDE/			8,364.0	8,365.0	4.00		0.360	EXP/	3.375	90.00		23.00	PRODUCTION	
8/21/2012 12:00AM	MESAVERDE/			8,396.0	8,397.0	4.00		0.360	EXP/	3.375	90.00		23.00	PRODUCTION	
8/21/2012 12:00AM	MESAVERDE/			8,414.0	8,416.0	4.00		0.360	EXP/	3.375	90.00		23.00	PRODUCTION	

3 Plots

US ROCKIES REGION

Operation Summary Report

Well: BONANZA 1023-5M3BS BLACK		Spud Date: 5/3/2012
Project: UTAH-UINTAH	Site: BONANZA 1023-5M PAD	Rig Name No: ROCKY MOUNTAIN WELL SERVICE 3/3
Event: COMPLETION	Start Date: 8/21/2012	End Date: 9/14/2012
Active Datum: RKB @5,309.00usft (above Mean Sea Level)	UWI: SW/SW/0/10/S/23/E/5/0/0/26/PM/S/205/W/0/1001/0/0	

Date	Time Start-End	Duration (hr)	Phase	Code	Sub Code	P/U	MD From (usft)	Operation
5/3/2012	-							
8/21/2012	8:00 - 10:00	2.00	FRAC	33	C	P		FILL SURFACE CSG. MIRU B&C QUICK TEST. PSI TEST T/ 1000 PSI. HELD FOR 15 MIN LOST 9 PSI. PSI TEST T/ 3500 PSI. HELD FOR 15 MIN LOST 36 PSI. 1ST PSI TEST T/ 7000 PSI. HELD FOR 30 MIN LOST 79 PSI. NO COMMUNICATION OR MIGRATION WITH SURFACE CSG BLEED OFF PSI. MOVE T/ NEXT WELL. SWIFW
8/22/2012	-							
8/28/2012	15:00 - 16:30	1.50	FRAC	37	B	P		PERF STG #1] P/U RIH W/PERF GUN, PERF MESAVERDE USING 3-1/8 EXPEND, 23 GRM, 0.36" HOLE. AS PERSAY IN PROCEDURE, X OVER TO FRAC CREW

US ROCKIES REGION

Operation Summary Report

Well: BONANZA 1023-5M3BS BLACK		Spud Date: 5/3/2012
Project: UTAH-UINTAH	Site: BONANZA 1023-5M PAD	Rig Name No: ROCKY MOUNTAIN WELL SERVICE 3/3
Event: COMPLETION	Start Date: 8/21/2012	End Date: 9/14/2012
Active Datum: RKB @5,309.00usft (above Mean Sea Level)	UWI: SW/SW/0/10/S/23/E/5/0/0/26/PM/S/205/W/0/1001/0/0	

Date	Time Start-End	Duration (hr)	Phase	Code	Sub Code	P/U	MD From (usft)	Operation
8/29/2012	11:30 - 17:00	5.50	FRAC	36	B	P		PERF & FRAC FOLLOWING WELL AS PER DESIGN W/ 30/50 MESH SAND & SLK WTR. ALL CBP'S ARE HALIBURTON 8K CBP'S. REFER TO STIM PJR FOR FLIUD, SAND AND CHEMICL VOLUME PUM'D FRAC STG #1] WHP=1,285#, BRK DN PERFS=3,802#, @=4.7 BPM, INJ RT=52.1, INJ PSI=4,198#, INITIAL ISIP=2,120#, INITIAL FG=.69, FINAL ISIP=2,266#, FINAL FG=71., AVERAGE RATE=51, AVERAGE PRESSURE=4,557#, MAX RATE=52.5, MAX PRESSURE=5,604#, NET PRESSURE INCREASE=146#, 24/24 100% CALC PERFS OPEN. X OVER TO WIRE LINE PERF STG #2] P/U RIH W/ HALIBURTON 8K CBP & PERF GUN, SET CBP @=8,144', PERF MESAVERDE USING 3-1/8 EXPEND, 23 GRM, 0.36" HOLE. AS PERSAY IN PROCEDURE, X OVER TO FRAC CREW FRAC STG #2] WHP=867#, BRK DN PERFS=5,061#, @=4.7 BPM, INJ RT=51.6, INJ PSI=5,330#, INITIAL ISIP=2,547#, INITIAL FG=.76, FINAL ISIP=2,331#, FINAL FG=.73, AVERAGE RATE=51.8, AVERAGE PRESSURE=4,578#, MAX RATE=52.2, MAX PRESSURE=5,529#, NET PRESSURE INCREASE= -216#, 22/24 92% CALC PERFS OPEN. X OVER TO WIRE LINE PERF STG #3] P/U RIH W/ HALIBURTON 8K CBP & PERF GUN, SET CBP @=7,932', PERF MESAVERDE USING 3-1/8 EXPEND, 23 GRM, 0.36" HOLE. AS PERSAY IN PROCEDURE, X OVER TO FRAC CREW FRAC STG #3] WHP=1,757#, BRK DN PERFS=3,116#, @=4.7 BPM, INJ RT=52.9, INJ PSI=4,464#, INITIAL ISIP=1,794#, INITIAL FG=.67, FINAL ISIP=2,362#, FINAL FG=.74, AVERAGE RATE=51.9, AVERAGE PRESSURE=4,886#, MAX RATE=52.3, MAX PRESSURE=5,072#, NET PRESSURE INCREASE=568#, 24/24 100% CALC PERFS OPEN. X OVER TO WIRE LINE PERF STG #4] P/U RIH W/ HALIBURTON 8K CBP & PERF GUN, SET CBP @=7,728', PERF MESAVERDE USING 3-1/8 EXPEND, 23 GRM, 0.36" HOLE. AS PERSAY IN PROCEDURE, X OVER TO FRAC CREW SWIFN
8/30/2012	7:00 - 7:15	0.25	FRAC	48	B	P		HSM, RIGGING DOWN

US ROCKIES REGION

Operation Summary Report

Well: BONANZA 1023-5M3BS BLACK		Spud Date: 5/3/2012
Project: UTAH-UINTAH	Site: BONANZA 1023-5M PAD	Rig Name No: ROCKY MOUNTAIN WELL SERVICE 3/3
Event: COMPLETION	Start Date: 8/21/2012	End Date: 9/14/2012
Active Datum: RKB @5,309.00usft (above Mean Sea Level)	UWI: SW/SW/0/10/S/23/E/5/0/0/26/PM/S/205/W/0/1001/0/0	

Date	Time Start-End	Duration (hr)	Phase	Code	Sub Code	P/U	MD From (usft)	Operation
	7:15 - 17:00	9.75	FRAC	36	B	P		FRAC STG #4] WHP=661#, BRK DN PERFS=2,772#, @=4.7 BPM, INJ RT=50.9, INJ PSI=4,325#, INITIAL ISIP=1,870#, INITIAL FG=.68, FINAL ISIP=1,984#, FINAL FG=.70, AVERAGE RATE=51.8, AVERAGE PRESSURE=4,004#, MAX RATE=52.2, MAX PRESSURE=4,518#, NET PRESSURE INCREASE=114#, 24/24 100% CALC PERFS OPEN. X OVER TO WIRE LINE PERF STG #5] P/U RIH W/ HALIBURTON 8K CBP & PERF GUN, SET CBP @=7,496', PERF MESAVERDE USING 3-1/8 EXPEND, 23 GRM, 0.36" HOLE. AS PERSAY IN PROCEDURE, X OVER TO FRAC CREW FRAC STG #5] WHP=1,609#, BRK DN PERFS=3,620#, @=4.7 BPM, INJ RT=51, INJ PSI=3,675#, INITIAL ISIP=1,544#, INITIAL FG=.65, FINAL ISIP=1,984#, FINAL FG=.70, AVERAGE RATE=51.6, AVERAGE PRESSURE=3,982#, MAX RATE=52.1, MAX PRESSURE=4,869#, NET PRESSURE INCREASE=376#, 24/24 100% CALC PERFS OPEN. X OVER TO WIRE LINE PERF STG #6] P/U RIH W/ HALIBURTON 8K CBP & PERF GUN, SET CBP @=7,218', PERF MESAVERDE USING 3-1/8 EXPEND, 23 GRM, 0.36" HOLE. AS PERSAY IN PROCEDURE, X OVER TO FRAC CREW FRAC STG #6] WHP=397#, BRK DN PERFS=3,184#, @=4.7 BPM, INJ RT=51.6, INJ PSI=3,447#, INITIAL ISIP=1,459#, INITIAL FG=.64, FINAL ISIP=2,130#, FINAL FG=.74, AVERAGE RATE=52.1, AVERAGE PRESSURE=3,821#, MAX RATE=52.3, MAX PRESSURE=4,248#, NET PRESSURE INCREASE=671#, 24/24 100% CALC PERFS OPEN. X OVER TO WIRE LINE PERF STG #7] P/U RIH W/ HALIBURTON 8K CBP & PERF GUN, SET CBP @=6,312', PERF MESAVERDE USING 3-1/8 EXPEND, 23 GRM, 0.36" HOLE. AS PERSAY IN PROCEDURE, X OVER TO FRAC CREW FRAC STG #7] WHP=170#, BRK DN PERFS=4,562#, @=4.6 BPM, INJ RT=44.1, INJ PSI=6,186#, INITIAL ISIP=1,329#, INITIAL FG=.65, FINAL ISIP=2,350#, FINAL FG=.81, AVERAGE RATE=50.4, AVERAGE PRESSURE=4,842#, MAX RATE=51,2, MAX PRESSURE=6,345#, NET PRESSURE INCREASE=1,021#, 15/24 63% CALC PERFS OPEN. X OVER TO WIRE LINE PERF STG #8] P/U RIH W/ HALIBURTON 8K CBP & PERF GUN, SET CBP @=5,968', PERF MESAVERDE USING 3-1/8 EXPEND, 23 GRM, 0.36" HOLE. AS PERSAY IN PROCEDURE, X OVER TO FRAC CREW

US ROCKIES REGION

Operation Summary Report

Well: BONANZA 1023-5M3BS BLACK		Spud Date: 5/3/2012	
Project: UTAH-UINTAH	Site: BONANZA 1023-5M PAD		Rig Name No: ROCKY MOUNTAIN WELL SERVICE 3/3
Event: COMPLETION	Start Date: 8/21/2012		End Date: 9/14/2012
Active Datum: RKB @5,309.00usft (above Mean Sea Level)	UWI: SW/SW/0/10/S/23/E/5/0/0/26/PM/S/205/W/0/1001/0/0		

Date	Time Start-End	Duration (hr)	Phase	Code	Sub Code	P/U	MD From (usft)	Operation
								FRAC STG #8] WHP=115#, BRK DN PERFS=1,510#, @=4.7 BPM, INJ RT=51.9, INJ PSI=3,118#, INITIAL ISIP=906#, INITIAL FG=.59, FINAL ISIP=1,343#, FINAL FG=.67, AVERAGE RATE=52, AVERAGE PRESSURE=4,842#, MAX RATE=51.2, MAX PRESSURE=4,240#, NET PRESSURE INCREASE=437#, 24/24 100% CALC PERFS OPEN. X OVER TO WIRE LINE P/U RIH W/ HALIBURTON 8K CBP, SET FOR TOP KILL @=5,731' TOTAL FLUID PUMP'D=7,290 BBLS TOTAL SAND PUMP'D=172,242#
9/13/2012	13:00 - 17:00	4.00	DRLOUT	31	I	P		MIRU, NDWH, NUBOP, PU 3 7/8" BIT & POBS W/ XN SN RIH W/ 147 JTS 2 3/8" L-80 OFF FLOAT TO 4,677', SWIFN
9/14/2012	7:00 - 7:15	0.25	DRLOUT	48		P		HSM-JSA

Operation Summary Report

Well: BONANZA 1023-5M3BS BLACK		Spud Date: 5/3/2012
Project: UTAH-UINTAH	Site: BONANZA 1023-5M PAD	Rig Name No: ROCKY MOUNTAIN WELL SERVICE 3/3
Event: COMPLETION	Start Date: 8/21/2012	End Date: 9/14/2012
Active Datum: RKB @5,309.00usft (above Mean Sea Level)	UWI: SW/SW/0/10/S/23/E/5/0/0/26/PM/S/205/W/0/1001/0/0	

Date	Time Start-End	Duration (hr)	Phase	Code	Sub Code	P/U	MD From (usft)	Operation
	7:15 - 15:00	7.75	DRLOUT	44	C	P		CONT TO PU TBG OFF FLOAT RIH TAG FILL @ 5,716'. C/O 15' SAND TAG PLUG #1 @ 5,731', DRL HAL 8K CBP IN 5 MIN, 0 PSI INC, FCP 0 PSI, RIH TAG FILL @ 5,918'. C/O 50' SAND TAG PLUG #2 @ 5,968', DRL HAL 8K CBP IN 5 MIN, 0 PSI INC, FCP 0 PSI, RIH TAG FILL @ 6,292'. C/O 20' SAND TAG PLUG #3 @ 6,312', DRL HAL 8K CBP IN 6 MIN, 0 PSI INC, FCP 0 PSI, RIH TAG FILL @ 7,188'. C/O 30' SAND TAG PLUG #4 @ 7,218', DRL HAL 8K CBP IN 4 MIN, 0 PSI INC, FCP 0 PSI, RIH TAG FILL @ 7,451'. C/O 45' SAND TAG PLUG #5 @ 7,496', DRL HAL 8K CBP IN 4 MIN, 0 PSI INC, FCP 0 PSI, RIH TAG FILL @ 7,663. C/O 65' SAND TAG PLUG # 6 @ 7,728', DRL HAL 8K CBP IN 5 MIN, 0 PSI INC, FCP 0 PSI, RIH TAG FILL @ 7,902'. C/O 30' SAND TAG PLUG #7 @ 7,932', DRL HAL 8K CBP IN 4 MIN, 0 PSI INC, FCP 0 PSI, RIH TAG FILL @ 8,129'. C/O 15' SAND TAG PLUG #8 @ 8,144', DRL HAL 8K CBP IN 3 MIN, 400 PSI INC, FCP 300 PSI, RIH TAG FILL @ 8,480. C/O 14' SAND TO PBTD @ 8,494', CIRC WELL CLEAN, RD PWR SWVL, POOH LD 19 JTS ON FLOAT, LAND TBG W/ 249 JTS 2 3/8" L-80, EOT @ 7,910.27', RD FLOOR & TBG EQUIP, NDBOP, NUWH, DROP BALL POBS @ 1,300 PSI, PRESS TEST FLOWLINE FROM WELLHEAD TO HAL 9,000 TO 3,000 PSI NO LEAKS, LET BIT FALL 30 MIN TURN OVER TO FBC, RDMO, MIRU ON 1023-5M3CS, SDFWE KB-14' HANGER-.83' 249 JTS2 3/8" L-80-7,893.24' POBS W/ XN SN-2.20' EOT @ 7,910.27' 283 JTS DEL 249 JTS USED 34 JTS RET

US ROCKIES REGION

Operation Summary Report

Well: BONANZA 1023-5M3BS BLACK		Spud Date: 5/3/2012
Project: UTAH-UINTAH	Site: BONANZA 1023-5M PAD	Rig Name No: ROCKY MOUNTAIN WELL SERVICE 3/3
Event: COMPLETION	Start Date: 8/21/2012	End Date: 9/14/2012
Active Datum: RKB @5,309.00usft (above Mean Sea Level)	UWI: SW/SW/0/10/S/23/E/5/0/0/26/PM/S/205/W/0/1001/0/0	

Date	Time Start-End	Duration (hr)	Phase	Code	Sub Code	P/U	MD From (usft)	Operation
	15:00 - 15:00	0.00	DRLOUT	50				TWTR=7,562 BBLS TWR=1,966 BBLS TWLTR=5,596 BBLS WELL TURNED TO SALES @ 15:15 HR ON 9/14/2012. 1,200 MCFD, 1920 BWPD, FCP 1548#, FTP 1245#, 20/64" CK.
9/15/2012	7:00 -			50				WELL IP'D ON 9/15/12 - 950 MCFD, 0 BODP, 0 BWPD, CP 1758#, FTP 1169#, CK 20/64", LP 120#, 24 HRS

Scientific Drilling

Project: UTAH - UTM (feet), NAD27, Zone 12N
Site: BONANZA 1023-5M PAD
Well: BONANZA 1023-5M3BS
Wellbore: OH
Design: OH

Anadarko Petroleum Corporation

WELL DETAILS: BONANZA 1023-5M3BS					
GL 5295 & KB 14 @ 5309.00ft (ENSIGN 138)					
+N/-S	+E/-W	Northing	Easting	Latitude	Longitude
0.00	0.00	14519838.85	2101073.96	39.971296	-109.355866

Azimuths to True North
Magnetic North: 10.90°

Magnetic Field
Strength: 52246.5snT
Dip Angle: 65.85°
Date: 04/19/2012
Model: IGRF2010

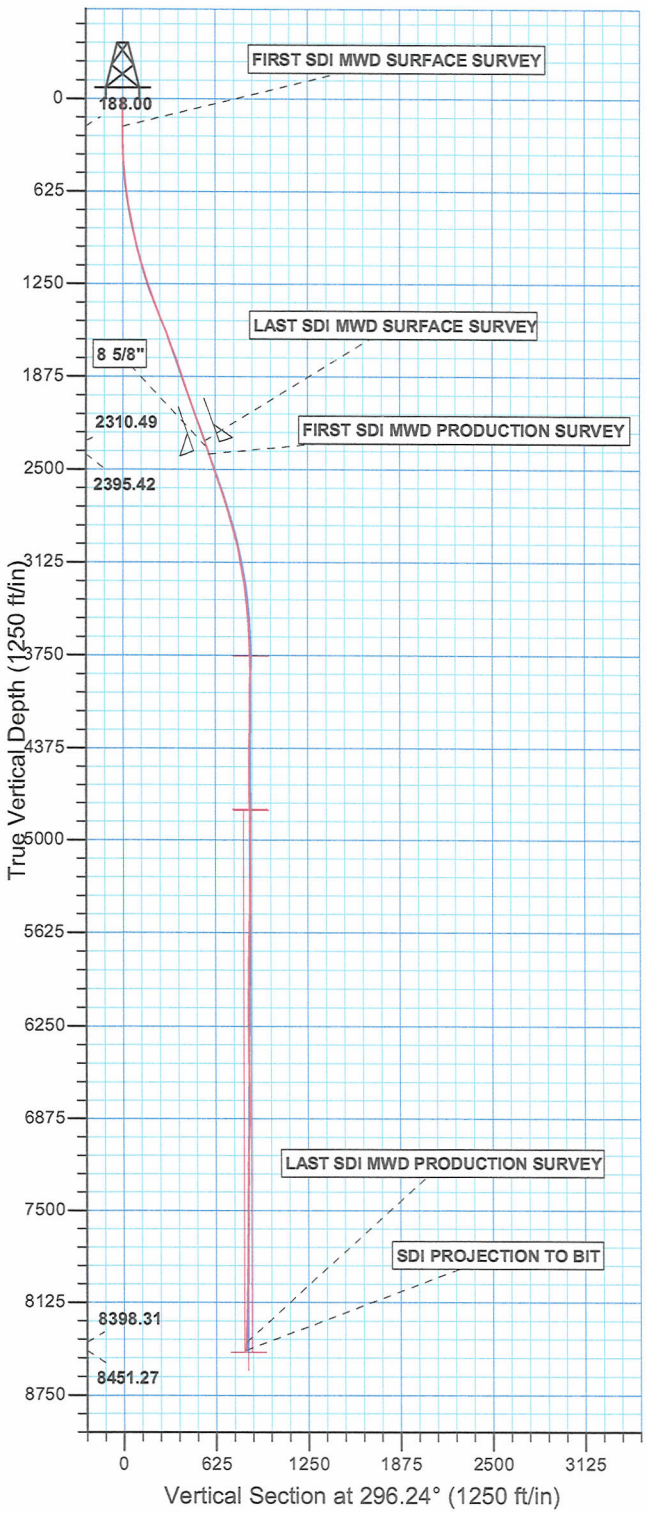

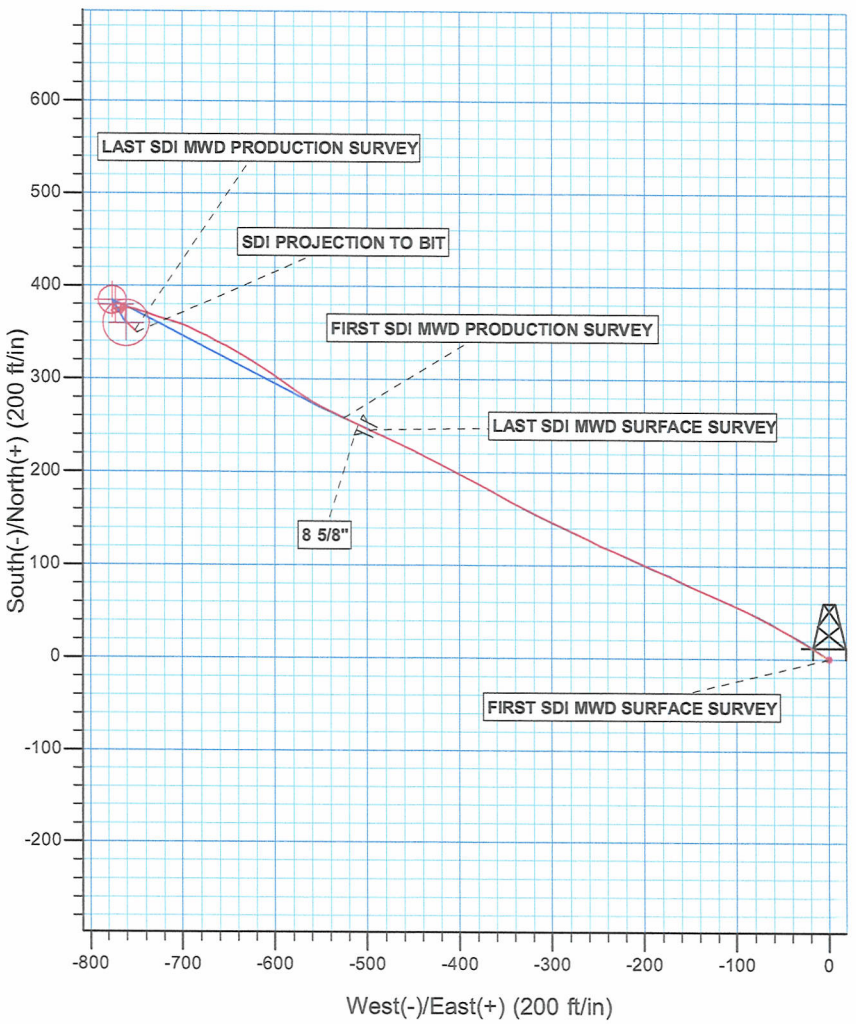

PROJECT DETAILS: UTAH - UTM (feet), NAD27, Zone 12N	
Geodetic System:	Universal Transverse Mercator (US Survey Feet)
Datum:	NAD 1927 (NADCON CONUS)
Ellipsoid:	Clarke 1866
Zone:	Zone 12N (114 W to 108 W)
Location:	SECTION5 T10S R23E
System Datum:	Mean Sea Level

Design: OH (BONANZA 1023-5M3BS/OH)

Created By: Gabe Kendall Date: 11:30, July 02 2012

Scientific Drilling

US ROCKIES REGION PLANNING

UTAH - UTM (feet), NAD27, Zone 12N
BONANZA 1023-5M PAD
BONANZA 1023-5M3BS

OH

Design: OH

Standard Survey Report

02 July, 2012

Anadarko
Petroleum Corporation

Company:	US ROCKIES REGION PLANNING	**Local Co-ordinate Reference:**	Well BONANZA 1023-5M3BS
Project:	UTAH - UTM (feet), NAD27, Zone 12N	**TVD Reference:**	GL 5295 & KB 14 @ 5309.00ft (ENSIGN 138)
Site:	BONANZA 1023-5M PAD	**MD Reference:**	GL 5295 & KB 14 @ 5309.00ft (ENSIGN 138)
Well:	BONANZA 1023-5M3BS	**North Reference:**	True
Wellbore:	OH	**Survey Calculation Method:**	Minimum Curvature
Design:	OH	**Database:**	EDM 5000.1 Single User Db

Project	UTAH - UTM (feet), NAD27, Zone 12N		
Map System:	Universal Transverse Mercator (US Survey Feet)	**System Datum:**	Mean Sea Level
Geo Datum:	NAD 1927 (NADCON CONUS)		
Map Zone:	Zone 12N (114 W to 108 W)		

Site	BONANZA 1023-5M PAD, SECTION 5 T10S R23E				
Site Position:		**Northing:**	14,519,855.22 usft	**Latitude:**	39.971338
From:	Lat/Long	**Easting:**	2,101,131.68 usft	**Longitude:**	-109.355659
Position Uncertainty:	0.00 ft	**Slot Radius:**	13.200 in	**Grid Convergence:**	1.06 °

Well	BONANZA 1023-5M3BS, 205 FSL 1001 FWL					
Well Position	**+N/-S**	0.00 ft	**Northing:**	14,519,838.85 usft	**Latitude:**	39.971296
	+E/-W	0.00 ft	**Easting:**	2,101,073.96 usft	**Longitude:**	-109.355866
Position Uncertainty		0.00 ft	**Wellhead Elevation:**	ft	**Ground Level:**	5,295.00 ft

Wellbore	OH				
Magnetics	**Model Name**	**Sample Date**	**Declination (°)**	**Dip Angle (°)**	**Field Strength (nT)**
	IGRF2010	04/19/12	10.90	65.85	52,247

Design	OH				
Audit Notes:					
Version:	1.0	**Phase:**	ACTUAL	**Tie On Depth:**	0.00
Vertical Section:	**Depth From (TVD) (ft)**	**+N/-S (ft)**	**+E/-W (ft)**	**Direction (°)**	
	0.00	0.00	0.00	296.24	

Survey Program **Date** 07/02/12

From (ft)	To (ft)	Survey (Wellbore)	Tool Name	Description
10.00	2,397.00	Survey #1 SDI MWD SURVEY (OH)	SDI MWD	SDI MWD - Standard ver 1.0.1
2,487.00	8,580.00	Survey #2 SDI MWD PRODUCTION (OH)	SDI MWD	SDI MWD - Standard ver 1.0.1

Survey

Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N/-S (ft)	+E/-W (ft)	Vertical Section (ft)	Dogleg Rate (°/100ft)	Build Rate (°/100ft)	Turn Rate (°/100ft)
0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
10.00	0.00	0.00	10.00	0.00	0.00	0.00	0.00	0.00	0.00
188.00	0.26	287.67	188.00	0.12	-0.38	0.40	0.15	0.15	0.00
FIRST SDI MWD SURFACE SURVEY									
276.00	0.70	296.63	276.00	0.42	-1.06	1.13	0.51	0.50	10.18
357.00	2.22	301.60	356.97	1.47	-2.83	3.19	1.88	1.88	6.14
447.00	4.13	303.40	446.83	4.17	-7.02	8.14	2.12	2.12	2.00
537.00	5.75	303.70	536.49	8.45	-13.48	15.83	1.80	1.80	0.33
627.00	7.03	303.58	625.93	14.00	-21.82	25.76	1.42	1.42	-0.13
717.00	8.79	298.48	715.07	20.33	-32.46	38.10	2.10	1.96	-5.67

Company:	US ROCKIES REGION PLANNING	**Local Co-ordinate Reference:**	Well BONANZA 1023-5M3BS
Project:	UTAH - UTM (feet), NAD27, Zone 12N	**TVD Reference:**	GL 5295 & KB 14 @ 5309.00ft (ENSIGN 138)
Site:	BONANZA 1023-5M PAD	**MD Reference:**	GL 5295 & KB 14 @ 5309.00ft (ENSIGN 138)
Well:	BONANZA 1023-5M3BS	**North Reference:**	True
Wellbore:	OH	**Survey Calculation Method:**	Minimum Curvature
Design:	OH	**Database:**	EDM 5000.1 Single User Db

Survey

Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N/-S (ft)	+E/-W (ft)	Vertical Section (ft)	Dogleg Rate (°/100ft)	Build Rate (°/100ft)	Turn Rate (°/100ft)
807.00	10.64	300.68	803.77	27.84	-45.65	53.25	2.10	2.06	2.44
897.00	12.05	298.13	892.01	36.51	-61.08	70.93	1.66	1.57	-2.83
987.00	13.51	297.36	979.78	45.77	-78.70	90.83	1.63	1.62	-0.86
1,077.00	15.26	293.47	1,066.96	55.32	-98.90	113.17	2.22	1.94	-4.32
1,167.00	17.10	293.32	1,153.39	65.28	-121.92	138.22	2.04	2.04	-0.17
1,257.00	18.73	294.00	1,239.02	76.40	-147.27	165.87	1.83	1.81	0.76
1,347.00	20.05	295.23	1,323.92	88.85	-174.43	195.74	1.54	1.47	1.37
1,437.00	21.28	292.94	1,408.13	101.79	-203.43	227.47	1.64	1.37	-2.54
1,527.00	21.28	294.26	1,491.99	114.87	-233.36	260.10	0.53	0.00	1.47
1,617.00	20.22	295.49	1,576.15	128.27	-262.29	291.97	1.27	-1.18	1.37
1,707.00	20.66	296.02	1,660.49	141.93	-290.60	323.40	0.53	0.49	0.59
1,797.00	19.79	295.84	1,744.94	155.54	-318.58	354.51	0.97	-0.97	-0.20
1,887.00	18.55	297.07	1,829.94	168.69	-345.04	384.07	1.45	-1.38	1.37
1,977.00	19.26	298.83	1,915.09	182.37	-370.79	413.21	1.01	0.79	1.96
2,067.00	19.87	297.51	1,999.89	196.59	-397.36	443.33	0.84	0.68	-1.47
2,157.00	20.58	296.55	2,084.34	210.72	-425.07	474.44	0.87	0.79	-1.07
2,247.00	19.52	296.28	2,168.89	224.45	-452.71	505.29	1.18	-1.18	-0.30
2,337.00	19.08	294.35	2,253.83	237.18	-479.59	535.03	0.86	-0.49	-2.14
2,397.00	19.35	294.26	2,310.49	245.30	-497.59	554.77	0.45	0.45	-0.15
LAST SDI MWD SURFACE SURVEY									
2,487.00	19.28	295.81	2,395.42	257.90	-524.56	584.53	0.57	-0.08	1.72
FIRST SDI MWD PRODUCTION SURVEY									
2,582.00	17.74	296.58	2,485.51	271.20	-551.62	614.69	1.64	-1.62	0.81
2,676.00	19.87	305.40	2,574.50	286.87	-577.46	644.79	3.77	2.27	9.38
2,771.00	19.54	303.95	2,663.94	305.10	-603.80	676.47	0.62	-0.35	-1.53
2,866.00	17.58	301.54	2,753.99	321.47	-629.21	706.50	2.22	-2.06	-2.54
2,960.00	15.92	297.75	2,844.01	334.90	-652.72	733.53	2.11	-1.77	-4.03
3,055.00	14.58	296.07	2,935.66	346.23	-674.99	758.51	1.49	-1.41	-1.77
3,149.00	12.22	293.35	3,027.09	355.37	-694.75	780.28	2.60	-2.51	-2.89
3,244.00	9.63	285.38	3,120.37	361.46	-711.65	798.13	3.15	-2.73	-8.39
3,338.00	9.23	289.32	3,213.10	366.04	-726.35	813.33	0.81	-0.43	4.19
3,433.00	7.74	288.58	3,307.06	370.60	-739.60	827.24	1.57	-1.57	-0.78
3,527.00	6.60	283.39	3,400.32	373.87	-750.86	838.78	1.39	-1.21	-5.52
3,622.00	5.10	274.55	3,494.83	375.47	-760.38	848.03	1.84	-1.58	-9.31
3,716.00	3.06	270.56	3,588.58	375.83	-767.05	854.17	2.19	-2.17	-4.24
3,811.00	2.72	252.95	3,683.46	375.19	-771.74	858.10	1.00	-0.36	-18.54
3,906.00	2.34	249.64	3,778.37	373.85	-775.71	861.07	0.43	-0.40	-3.48
4,000.00	0.90	151.03	3,872.34	372.54	-777.16	861.78	2.80	-1.53	-104.90
4,095.00	0.79	145.26	3,967.33	371.35	-776.42	860.60	0.15	-0.12	-6.07
4,189.00	0.83	154.27	4,061.32	370.20	-775.76	859.49	0.14	0.04	9.59
4,284.00	0.85	148.38	4,156.31	368.98	-775.09	858.35	0.09	0.02	-6.20
4,379.00	0.94	43.73	4,251.31	368.95	-774.18	857.52	1.49	0.09	-110.16
4,473.00	0.62	57.46	4,345.30	369.78	-773.22	857.03	0.39	-0.34	14.61

Company:	US ROCKIES REGION PLANNING	**Local Co-ordinate Reference:**	Well BONANZA 1023-5M3BS
Project:	UTAH - UTM (feet), NAD27, Zone 12N	**TVD Reference:**	GL 5295 & KB 14 @ 5309.00ft (ENSIGN 138)
Site:	BONANZA 1023-5M PAD	**MD Reference:**	GL 5295 & KB 14 @ 5309.00ft (ENSIGN 138)
Well:	BONANZA 1023-5M3BS	**North Reference:**	True
Wellbore:	OH	**Survey Calculation Method:**	Minimum Curvature
Design:	OH	**Database:**	EDM 5000.1 Single User Db

Survey

Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N/-S (ft)	+E/-W (ft)	Vertical Section (ft)	Dogleg Rate (°/100ft)	Build Rate (°/100ft)	Turn Rate (°/100ft)
4,568.00	0.54	52.78	4,440.29	370.32	-772.43	856.56	0.10	-0.08	-4.93
4,662.00	0.54	74.48	4,534.29	370.71	-771.65	856.03	0.22	0.00	23.09
4,757.00	0.62	110.28	4,629.28	370.65	-770.74	855.19	0.38	0.08	37.68
4,851.00	1.32	321.05	4,723.28	371.32	-770.94	855.67	2.00	0.74	-158.76
4,946.00	1.34	317.79	4,818.25	372.99	-772.37	857.69	0.08	0.02	-3.43
5,040.00	1.32	306.90	4,912.23	374.46	-773.98	859.78	0.27	-0.02	-11.59
5,135.00	1.20	316.20	5,007.20	375.83	-775.54	861.79	0.25	-0.13	9.79
5,230.00	0.89	45.38	5,102.19	377.07	-775.71	862.48	1.56	-0.33	93.87
5,324.00	1.05	58.84	5,196.18	378.03	-774.45	861.78	0.30	0.17	14.32
5,419.00	1.14	57.46	5,291.16	378.98	-772.91	860.82	0.10	0.09	-1.45
5,513.00	1.06	77.06	5,385.15	379.68	-771.27	859.66	0.41	-0.09	20.85
5,608.00	1.11	86.83	5,480.13	379.93	-769.50	858.18	0.20	0.05	10.28
5,702.00	0.76	112.12	5,574.12	379.75	-768.01	856.76	0.57	-0.37	26.90
5,797.00	0.70	105.98	5,669.11	379.35	-766.87	855.56	0.10	-0.06	-6.46
5,892.00	0.84	116.13	5,764.10	378.88	-765.68	854.30	0.21	0.15	10.68
5,986.00	1.11	121.05	5,858.09	378.11	-764.29	852.70	0.30	0.29	5.23
6,081.00	1.32	123.85	5,953.06	377.02	-762.59	850.70	0.23	0.22	2.95
6,176.00	1.49	210.74	6,048.04	375.35	-762.31	849.71	2.04	0.18	91.46
6,270.00	1.58	199.76	6,142.01	373.08	-763.37	849.66	0.33	0.10	-11.68
6,364.00	1.58	228.85	6,235.98	371.01	-764.79	850.01	0.84	0.00	30.95
6,459.00	1.49	218.39	6,330.94	369.18	-766.54	850.78	0.31	-0.09	-11.01
6,554.00	1.55	350.41	6,425.93	369.48	-767.52	851.79	2.92	0.06	138.97
6,648.00	2.02	356.91	6,519.88	372.39	-767.82	853.34	0.54	0.50	6.91
6,743.00	1.67	3.37	6,614.83	375.44	-767.83	854.70	0.43	-0.37	6.80
6,837.00	1.32	24.24	6,708.80	377.80	-767.31	855.27	0.68	-0.37	22.20
6,932.00	0.97	55.88	6,803.78	379.25	-766.19	854.91	0.75	-0.37	33.31
7,026.00	1.06	76.09	6,897.77	379.90	-764.69	853.86	0.39	0.10	21.50
7,121.00	1.49	94.73	6,992.75	380.01	-762.61	852.03	0.62	0.45	19.62
7,215.00	1.41	184.90	7,086.73	378.76	-761.49	850.48	2.19	-0.09	95.93
7,310.00	1.49	178.84	7,181.70	376.36	-761.56	849.48	0.18	0.08	-6.38
7,405.00	1.32	178.31	7,276.67	374.03	-761.50	848.40	0.18	-0.18	-0.56
7,499.00	1.49	170.14	7,370.64	371.74	-761.26	847.17	0.28	0.18	-8.69
7,594.00	1.15	187.78	7,465.61	369.58	-761.18	846.14	0.55	-0.36	18.57
7,688.00	1.12	193.85	7,559.60	367.75	-761.53	845.65	0.13	-0.03	6.46
7,783.00	1.23	187.95	7,654.58	365.84	-761.89	845.13	0.17	0.12	-6.21
7,877.00	1.49	176.64	7,748.55	363.62	-761.96	844.21	0.40	0.28	-12.03
7,972.00	1.01	161.13	7,843.53	361.60	-761.62	843.01	0.61	-0.51	-16.33
8,067.00	0.97	138.32	7,938.51	360.21	-760.81	841.67	0.41	-0.04	-24.01
8,161.00	1.24	132.75	8,032.50	358.92	-759.53	839.95	0.31	0.29	-5.93
8,256.00	1.68	137.32	8,127.46	357.20	-757.84	837.67	0.48	0.46	4.81
8,350.00	1.74	134.15	8,221.42	355.19	-755.88	835.03	0.12	0.06	-3.37
8,447.00	2.11	132.80	8,318.37	352.95	-753.51	831.91	0.38	0.38	-1.39
8,527.00	2.20	135.12	8,398.31	350.86	-751.35	829.05	0.16	0.11	2.90
LAST SDI MWD PRODUCTION SURVEY									

Company:	US ROCKIES REGION PLANNING	**Local Co-ordinate Reference:**	Well BONANZA 1023-5M3BS
Project:	UTAH - UTM (feet), NAD27, Zone 12N	**TVD Reference:**	GL 5295 & KB 14 @ 5309.00ft (ENSIGN 138)
Site:	BONANZA 1023-5M PAD	**MD Reference:**	GL 5295 & KB 14 @ 5309.00ft (ENSIGN 138)
Well:	BONANZA 1023-5M3BS	**North Reference:**	True
Wellbore:	OH	**Survey Calculation Method:**	Minimum Curvature
Design:	OH	**Database:**	EDM 5000.1 Single User Db

Survey

Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N/-S (ft)	+E/-W (ft)	Vertical Section (ft)	Dogleg Rate (°/100ft)	Build Rate (°/100ft)	Turn Rate (°/100ft)
8,580.00	2.20	135.12	8,451.27	349.42	-749.91	827.12	0.00	0.00	0.00
SDI PROJECTION TO BIT									

Design Annotations

Measured Depth (ft)	Vertical Depth (ft)	Local Coordinates +N/-S (ft)	Local Coordinates +E/-W (ft)	Comment
188.00	188.00	0.12	-0.38	FIRST SDI MWD SURFACE SURVEY
2,397.00	2,310.49	245.30	-497.59	LAST SDI MWD SURFACE SURVEY
2,487.00	2,395.42	257.90	-524.56	FIRST SDI MWD PRODUCTION SURVEY
8,527.00	8,398.31	350.86	-751.35	LAST SDI MWD PRODUCTION SURVEY
8,580.00	8,451.27	349.42	-749.91	SDI PROJECTION TO BIT

Checked By: _____ Approved By: _____ Date: _____

STATE OF UTAH
DEPARTMENT OF NATURAL RESOURCES
DIVISION OF OIL, GAS AND MINING

FORM 6

ENTITY ACTION FORM

Operator: KERR McGEE OIL & GAS ONSHORE LP
Operator Account Number: N 2995
Address: P.O. Box 173779
city DENVER
state CO zip 80217
Phone Number: (720) 929-6304

Well 1

API Number	Well Name		QQ	Sec	Twp	Rng	County
Various	Ponderosa Wells						UINTAH
Action Code	**Current Entity Number**	**New Entity Number**	**Spud Date**			**Entity Assignment Effective Date**	
	18421	19519				5/1/2012	

Comments: Move the attached wells into the Ponderosa unit. All wells are WSMVD. 11/16/2012

Well 2

API Number	Well Name		QQ	Sec	Twp	Rng	County
Action Code	**Current Entity Number**	**New Entity Number**	**Spud Date**			**Entity Assignment Effective Date**	

Comments:

Well 3

API Number	Well Name		QQ	Sec	Twp	Rng	County
Action Code	**Current Entity Number**	**New Entity Number**	**Spud Date**			**Entity Assignment Effective Date**	

Comments:

ACTION CODES:

- **A** - Establish new entity for new well (single well only)
- **B** - Add new well to existing entity (group or unit well)
- **C** - Re-assign well from one existing entity to another existing entity
- **D** - Re-assign well from one existing entity to a new entity
- **E** - Other (Explain in 'comments' section)

JAIME SCHARNOWSKE
Name (Please Print)
Signature
REGULATORY ANALYST 11/8/2012
Title **Date**

RECEIVED
NOV 08 2012
Div. of Oil, Gas & Mining

(5/2000)

Well Name	Quarter/Quarter	Section	Township	Range	APUI Number	County	New Entity Number	Formation
BONANZA 1023-6J2AS	NESW	6	10S	23E	4304751465	Uintah	18519	WSMVD
BONANZA 1023-6K1CS	NESW	6	10S	23E	4304751466	Uintah	18519	WSMVD
BONANZA 1023-6K2BS	NESW	6	10S	23E	4304751467	Uintah	18519	WSMVD
BONANZA 1023-6K2CS	NESW	6	10S	23E	4304751468	Uintah	18519	WSMVD
BONANZA 1023-6L2AS	NESW	6	10S	23E	4304751469	Uintah	18519	WSMVD
BONANZA 1023-6L2DS	NESW	6	10S	23E	4304751470	Uintah	18519	WSMVD
BONANZA 1023-6O1BS	SWSE	6	10S	23E	4304751473	Uintah	18519	WSMVD
BONANZA 1023-6O2DS	SWSE	6	10S	23E	4304751474	Uintah	18519	WSMVD
BONANZA 1023-6O3AS	SWSE	6	10S	23E	4304751475	Uintah	18519	WSMVD
BONANZA 1023-6P2BS	SWSE	6	10S	23E	4304751476	Uintah	18519	WSMVD
BONANZA 1023-6P3CS	SWSE	6	10S	23E	4304751478	Uintah	18519	WSMVD
BONANZA 1023-5J2DS	NESW	5	10S	23E	4304752063	Uintah	18519	WSMVD
BONANZA 1023-5K1BS	NESW	5	10S	23E	4304752064	Uintah	18519	WSMVD
BONANZA 1023-5K1CS	NESW	5	10S	23E	4304752065	Uintah	18519	WSMVD
BONANZA 1023-5K3DS	NESW	5	10S	23E	4304752066	Uintah	18519	WSMVD
BONANZA 1023-5L1DS	NESW	5	10S	23E	4304752067	Uintah	18519	WSMVD
BONANZA 1023-5L4AS	NESW	5	10S	23E	4304752068	Uintah	18519	WSMVD
BONANZA 1023-5L4DS	NESW	5	10S	23E	4304752069	Uintah	18519	WSMVD
BONANZA 1023-5O2AS	NESW	5	10S	23E	4304752070	Uintah	18519	WSMVD
BONANZA 1023-5E3BS	SWNW	5	10S	23E	4304752071	Uintah	18519	WSMVD
BONANZA 1023-5E3CS	SWNW	5	10S	23E	4304752072	Uintah	18519	WSMVD
BONANZA 1023-5L1AS	SWNW	5	10S	23E	4304752073	Uintah	18519	WSMVD
BONANZA 1023-5L3BS	SWNW	5	10S	23E	4304752074	Uintah	18519	WSMVD
BONANZA 1023-5M1AS	SWSW	5	10S	23E	4304752075	Uintah	18519	WSMVD
BONANZA 1023-5M1CS	SWSW	5	10S	23E	4304752076	Uintah	18519	WSMVD
BONANZA 1023-5M3BS	SWSW	5	10S	23E	4304752077	Uintah	18519	WSMVD
BONANZA 1023-5M3CS	SWSW	5	10S	23E	4304752078	Uintah	18519	WSMVD
BONANZA 1023-5N3CS	SWSW	5	10S	23E	4304752079	Uintah	18519	WSMVD
BONANZA 1023-5O4BS	SESE	5	10S	23E	4304752082	Uintah	18519	WSMVD
BONANZA 1023-5P1AS	SESE	5	10S	23E	4304752083	Uintah	18519	WSMVD
BONANZA 1023-5P1CS	SESE	5	10S	23E	4304752084	Uintah	18519	WSMVD
BONANZA 1023-5P4CS	SESE	5	10S	23E	4304752085	Uintah	18519	WSMVD
BONANZA 1023-5C4AS	NENW	5	10S	23E	4304752089	Uintah	18519	WSMVD
BONANZA 1023-5F2CS	NENW	5	10S	23E	4304752090	Uintah	18519	WSMVD
BONANZA 1023-5F3AS	NENW	5	10S	23E	4304752091	Uintah	18519	WSMVD
BONANZA 1023-5C2CS	NWNW	5	10S	23E	4304752092	Uintah	18519	WSMVD
BONANZA 1023-5D2DS	NWNW	5	10S	23E	4304752093	Uintah	18519	WSMVD
BONANZA 1023-5D3AS	NWNW	5	10S	23E	4304752094	Uintah	18519	WSMVD
BONANZA 1023-5E2AS	NWNW	5	10S	23E	4304752095	Uintah	18519	WSMVD
BONANZA 1023-6A1CS	NWNW	5	10S	23E	4304752096	Uintah	18519	WSMVD
BONANZA 1023-6I3AS	SWNW	5	10S	23E	4304752387	Uintah	18519	WSMVD
BONANZA 11-2	SWNW	11	10S	23E	4304734773	Uintah	18519	WSMVD
BONANZA 1023-6E4AS	SENW	6	10S	23E	4304751453	Uintah	18519	WSMVD
BONANZA 1023-6F1AS	SENW	6	10S	23E	4304751454	Uintah	18519	WSMVD
BONANZA 1023-6F1CS	SENW	6	10S	23E	4304751455	Uintah	18519	WSMVD
BONANZA 1023-6F4CS	SENW	6	10S	23E	4304751456	Uintah	18519	WSMVD
BONANZA 1023-6G2AS	SENW	6	10S	23E	4304751457	Uintah	18519	WSMVD
BONANZA 1023-6G4CS	SENW	6	10S	23E	4304751458	Uintah	18519	WSMVD
BONANZA 1023-6A3DS	SENE	6	10S	23E	4304751459	Uintah	18519	WSMVD
BONANZA 1023-6G1DS	SENE	6	10S	23E	4304751460	Uintah	18519	WSMVD
BONANZA 1023-6H1BS	SENE	6	10S	23E	4304751461	Uintah	18519	WSMVD
BONANZA 1023-6H2CS	SENE	6	10S	23E	4304751462	Uintah	18519	WSMVD
BONANZA 1023-6I2AS	SENE	6	10S	23E	4304751463	Uintah	18519	WSMVD
BONANZA 1023-6I3DS	SWSE	6	10S	23E	4304751471	Uintah	18519	WSMVD
BONANZA 1023-6J4AS	SWSE	6	10S	23E	4304751472	Uintah	18519	WSMVD
BONANZA 1023-6P3AS	SWSE	6	10S	23E	4304751477	Uintah	18519	WSMVD